
Side Table

Assembly Instructions - Please keep for future reference



Important - Please read these instructions fully before starting assembly

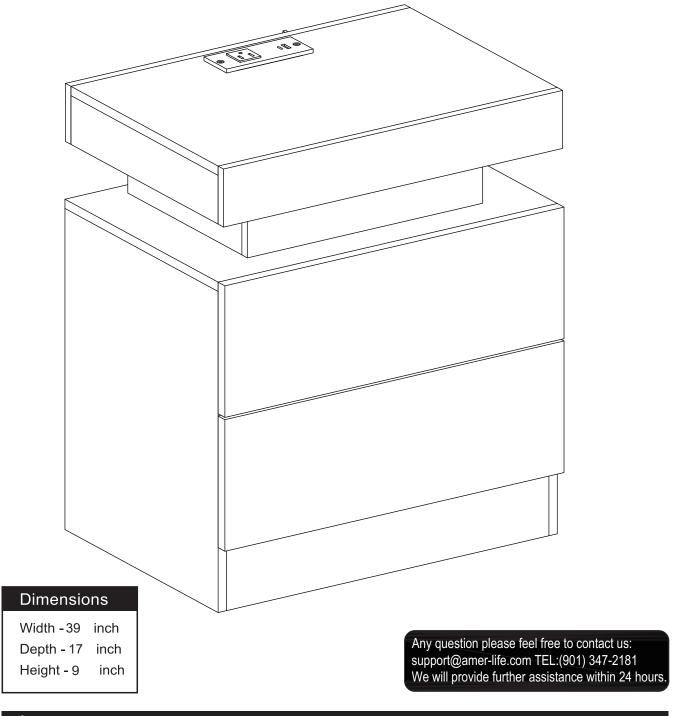

Safety and Care Advice

Important - Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on the following pages.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.

- During assembly do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.



 To reduce the likelihood of damaging your product please ensure that your

power drill is set on a low torque setting.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste.
 Take to your local authority waste disposal centre.

Handy Hints

- Assemble all parts and bolts loosely during assembly, only once the product is complete should you fully tighten the bolts
- Regularly check and ensure that all bolts and fittings are tightend properly.

WARNING In order to help prevent overturning – please follow these instructions

To help prevent product toppling over please follow the below steps:-

Use the anti tip strap or wall fixing method provided (if applicable)

Do not allow children to climb or hang on the furniture

Do not open more than one drawer at a time

Do not place heavy items in the top drawers


Do not place heavy items on top of the furniture, unless the furniture has been designed for this purpose

Please note that only the anti tip strap is provided.

You will need to provide wall plugs and screws applicable for your wall type

Components - Panels

Please check you have all the panels listed below

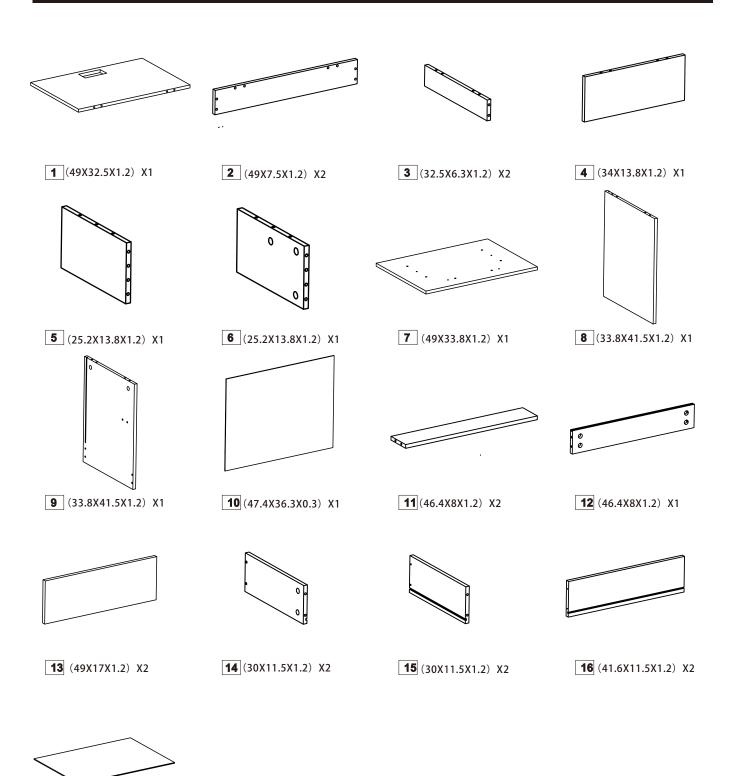

17 (42.2X30.8X0.3) X2

Components - Fittings

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

| A | B | 6 |
|---------------------------|---------------------|--------------------------|
| 7*35mm Cam Bolt x 44 | Camlock x 44 | 6*30mm Wooden Dowel x 32 |
| o | (E) | 6 |
| 3.5*14mm Screw x 2 | 5*40mm Screw x 12 | Strip light x 1 |
| G $\sqrt{7}$ | (H) | 0 |
| Electrical plug board x 1 | 3.5*10mm Screw x 23 | Plastic buckle x 3 |
| 0 | (1) | |
| Back Panel Stiffener x 4 | Slide rail x 2 | Slide rail x 2 |
| D | © 6 | |
| Slide rail x 2 | Slide rail x 2 | |

Tools required



Phillips screwdriver (medium & large)

Ruler - Use this ruler to help correctly identify the screws


0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170

The screws length is measured from the head to the point (30mm screw shown).

Using Camlocks

Step 1

Connect the male camlock as directed in the assembly instructions using a screwdriver.



Step 2


Push the male camlock into the entry hole.



Step 3

Insert the female camlock as shown in the instructions.

Note: ensure that the arrow on the top of the camlock points towards the entry hole for the male camlock.





Step 4


Turn the female camlock clockwise with a screwdriver.

You should feel a click when the camlock is locked in place.


The joint is now secure.




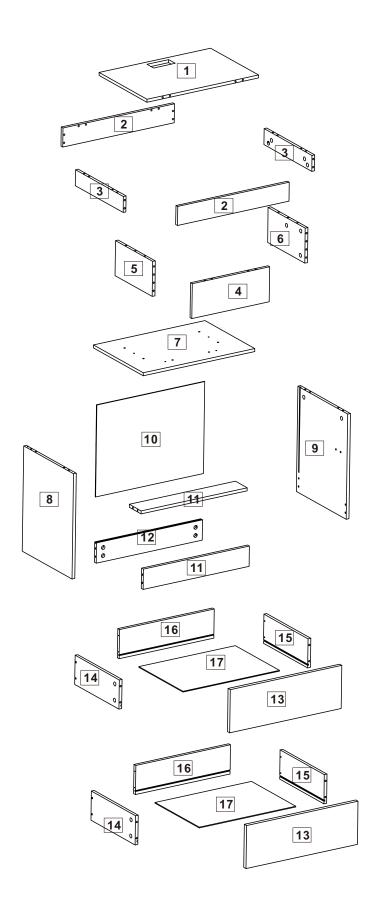


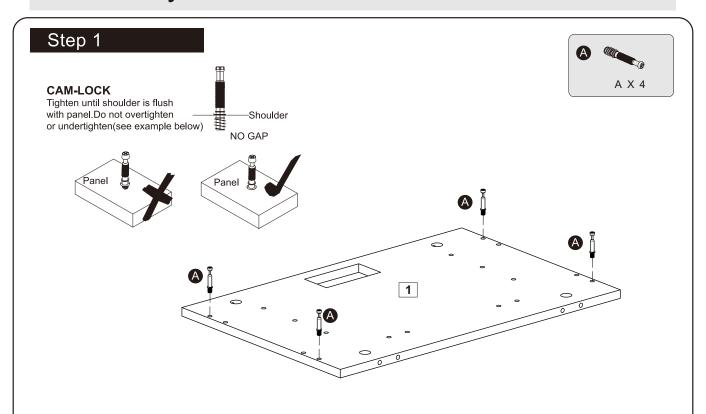



Secure the cam pin (A) to the part (1) with a screwdriver.

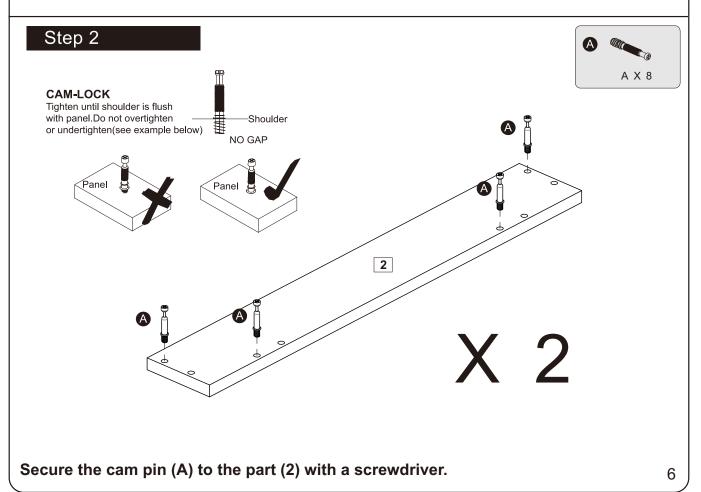


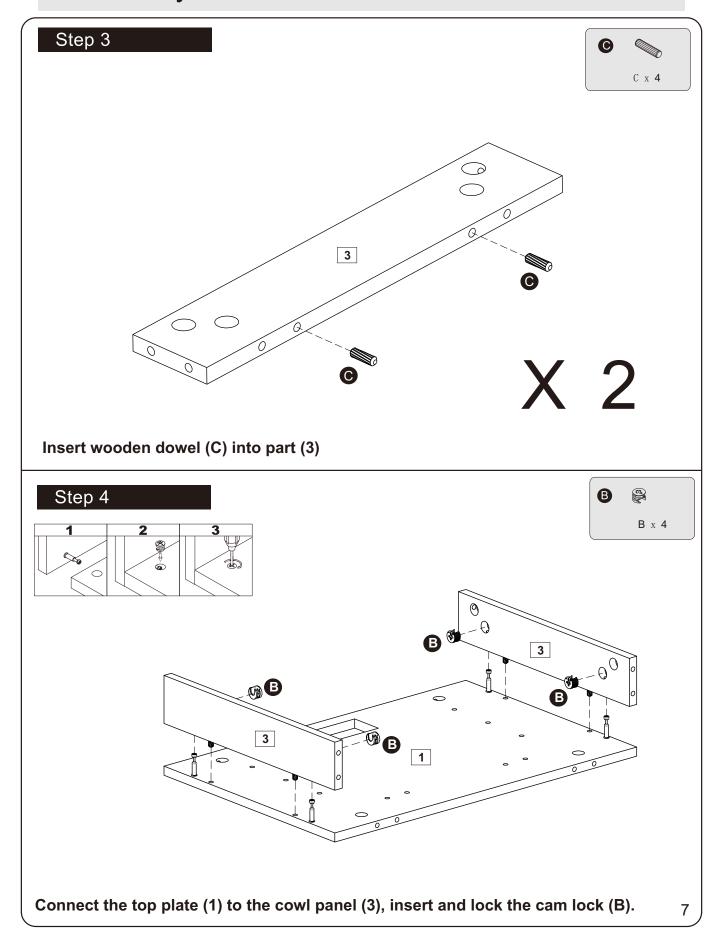


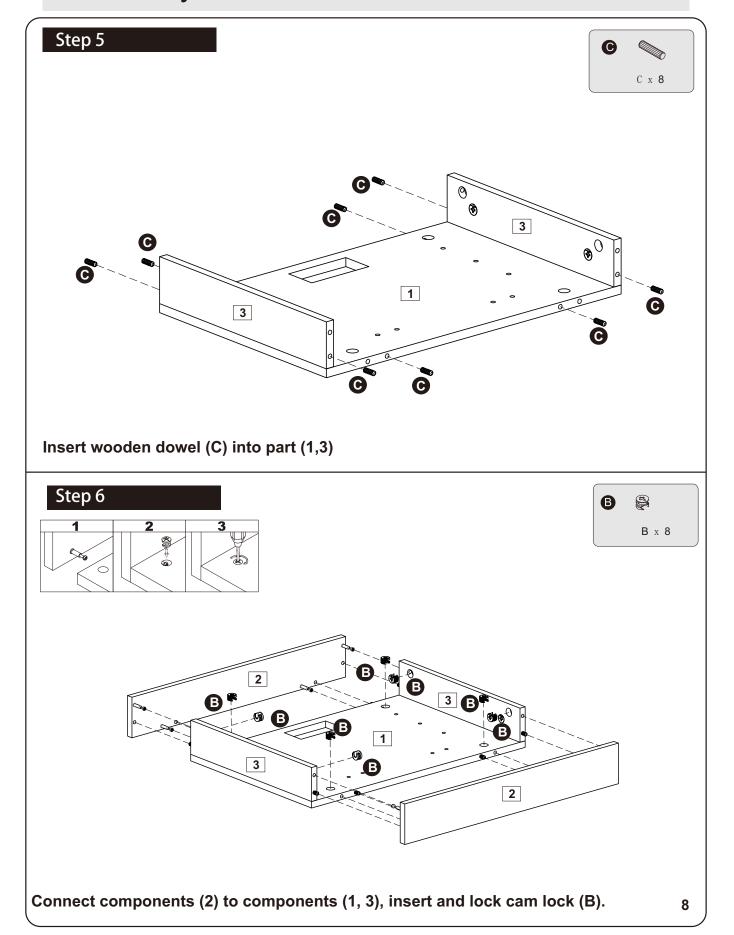

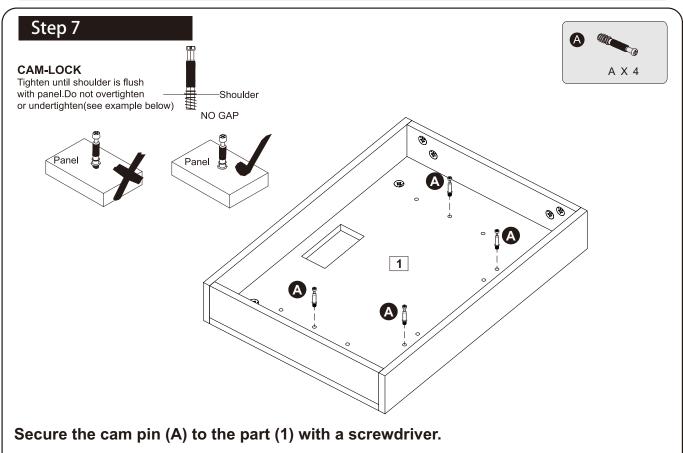


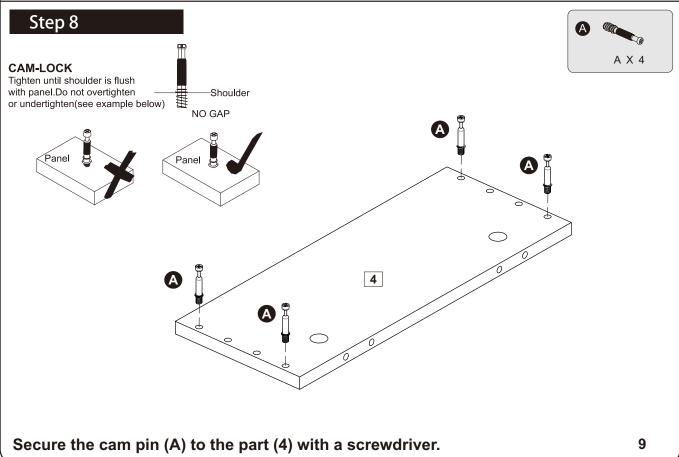

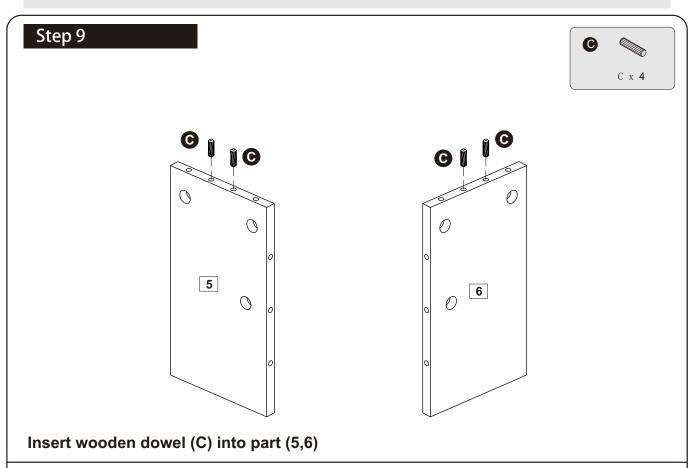


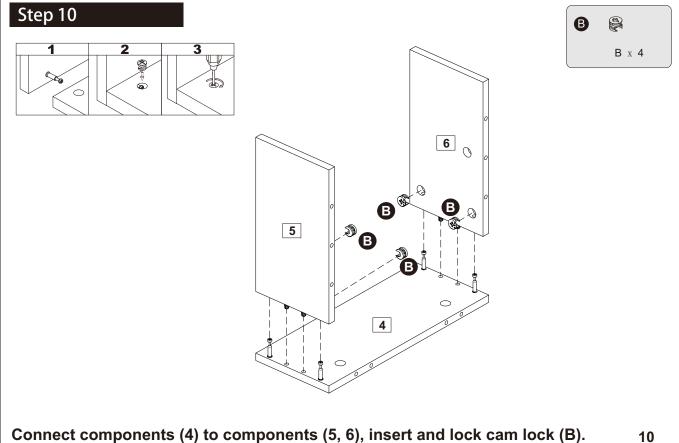


10

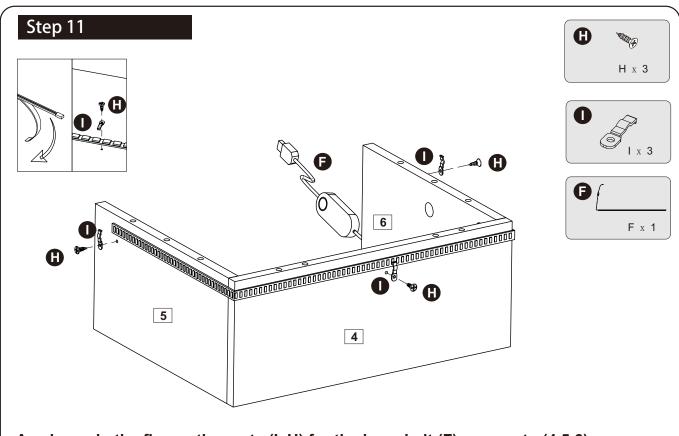



As shown in the figure, the parts (I, H) for the lamp belt (F), secure to (4.5.6).

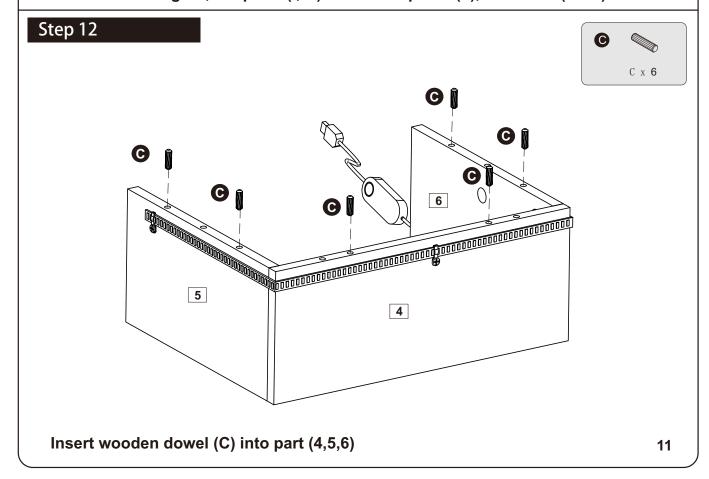


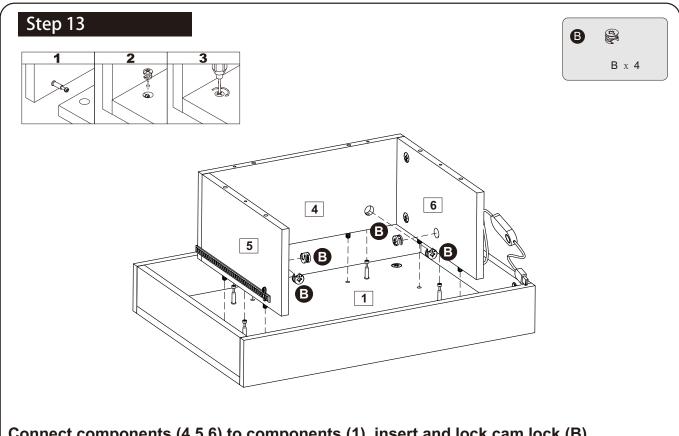


Connect components (4,5,6) to components (1), insert and lock cam lock (B).

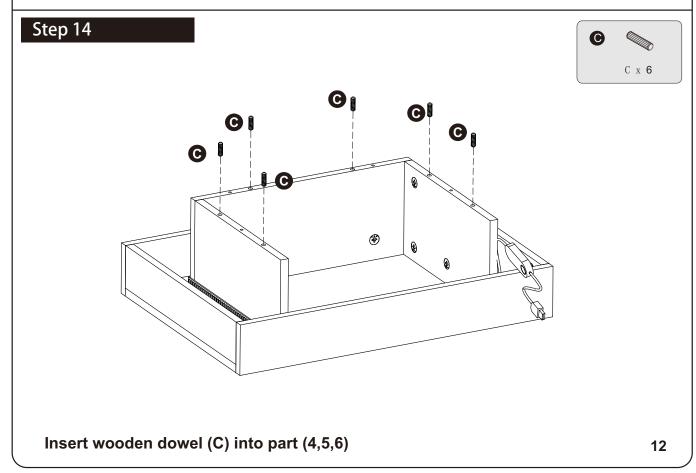

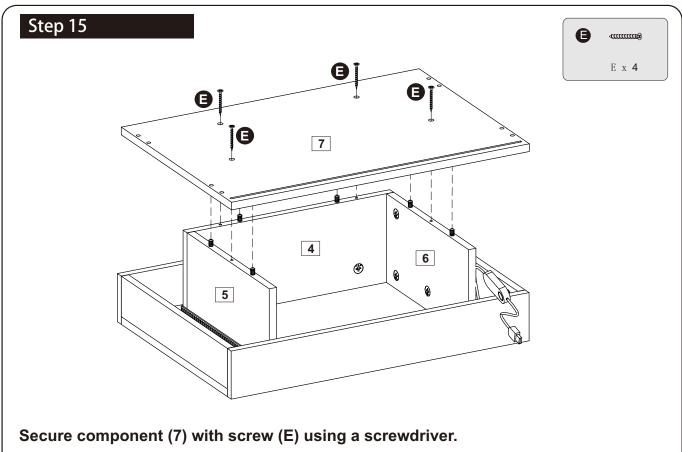


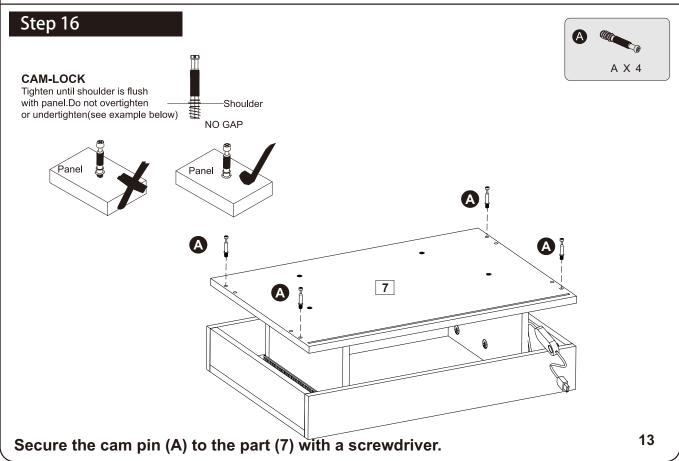

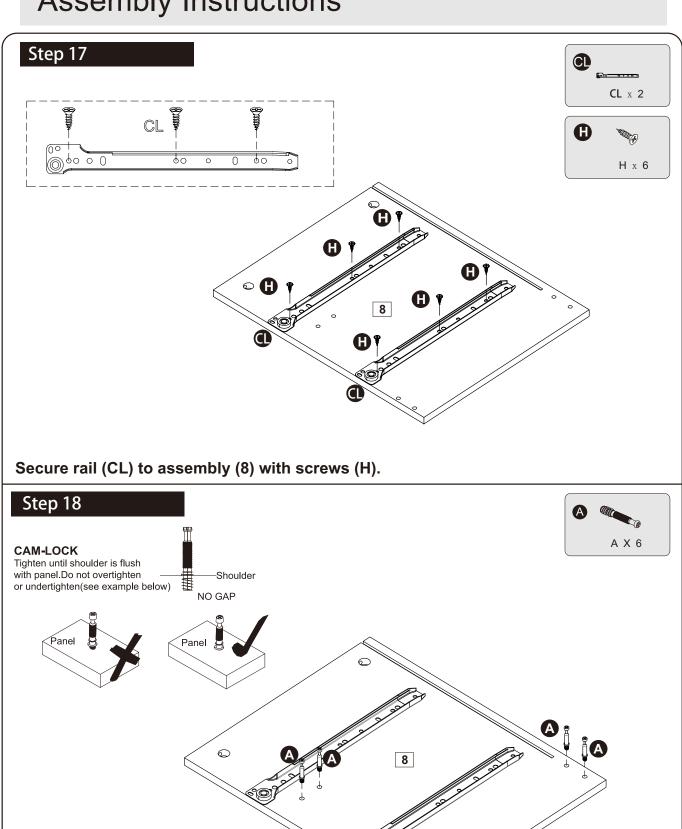


14

Secure the cam pin (A) to the part (8) with a screwdriver.

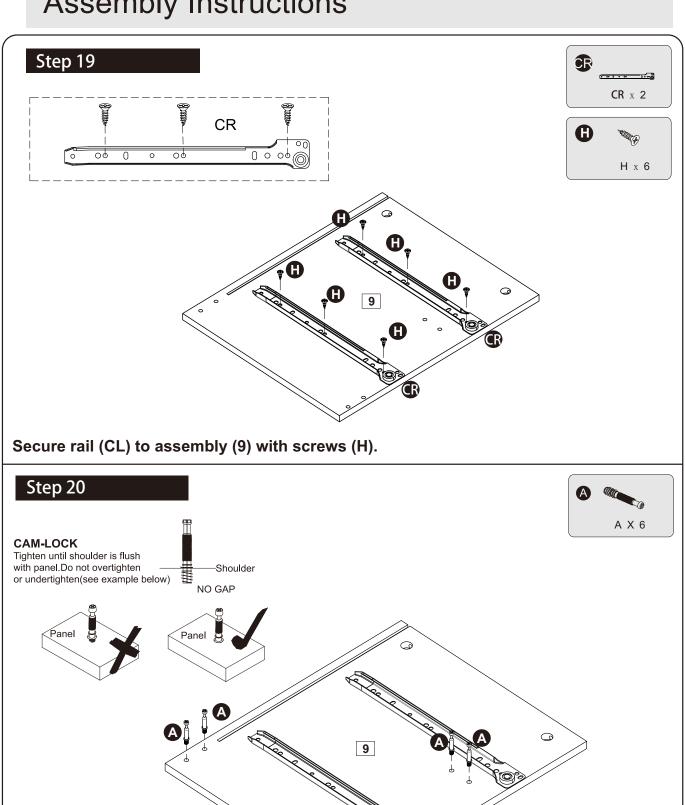


Secure the cam pin (A) to the part (9) with a screwdriver.


15

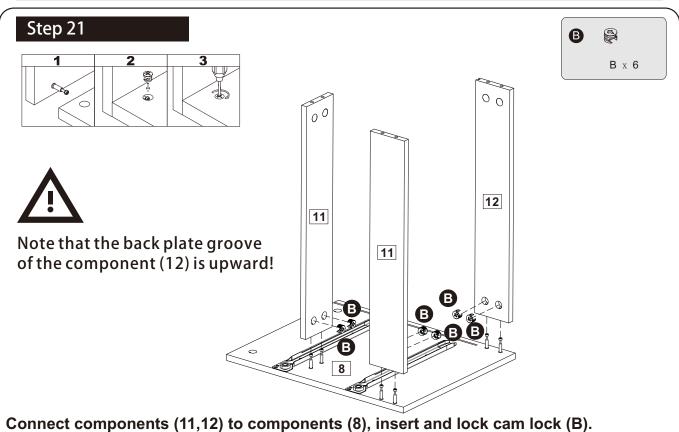



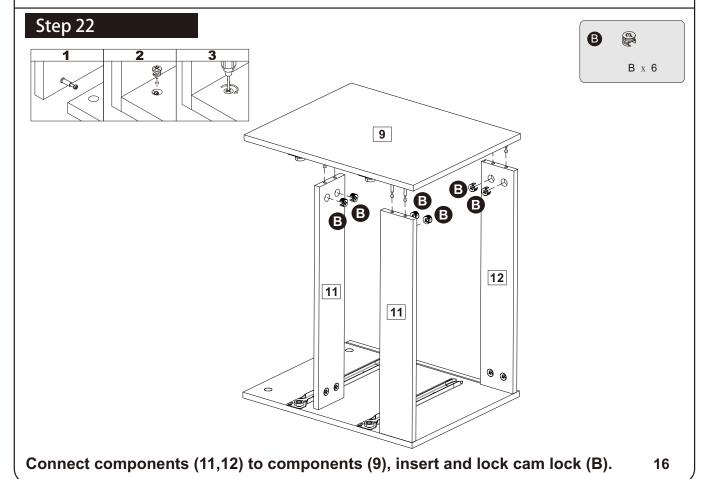



Step 23

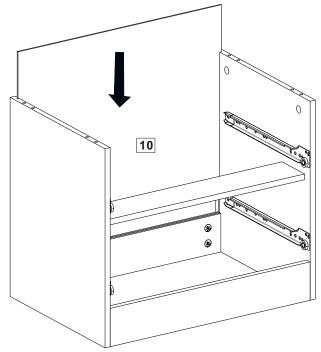


Slide the back plate (10) into the groove as shown.


Step 24

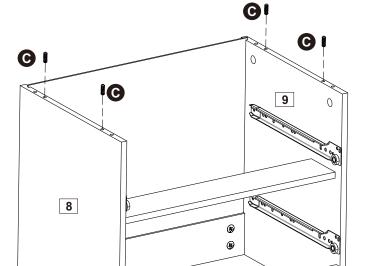




Insert wooden dowel (C) into part (8,9)

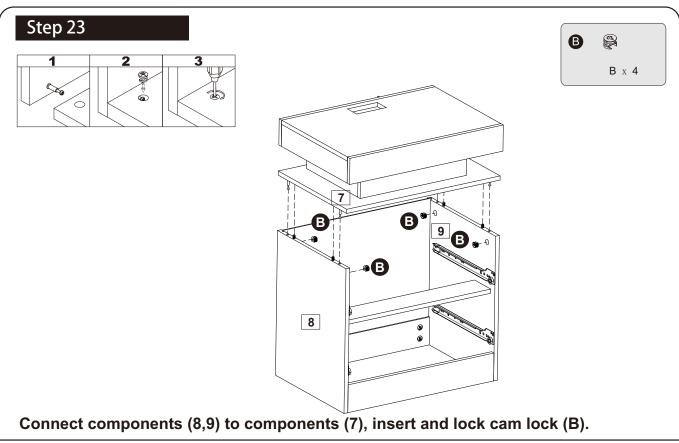

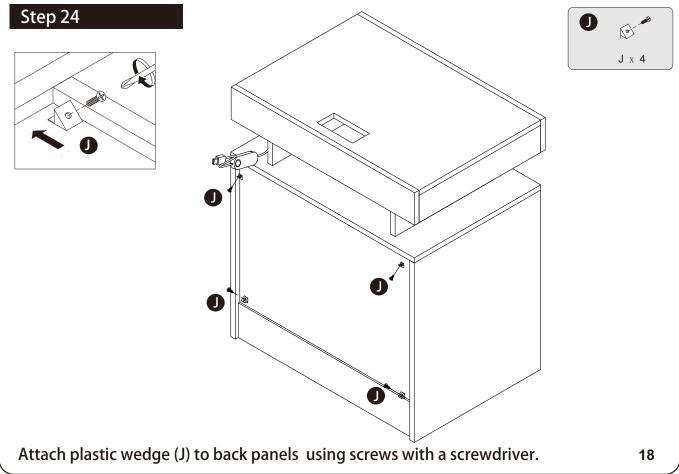


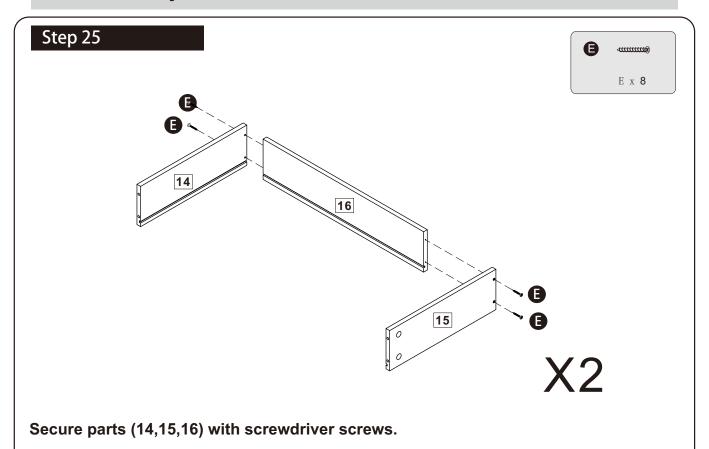


Step 26 Tr X2

Slide the back panels (17) into grooves as per diagram.


19

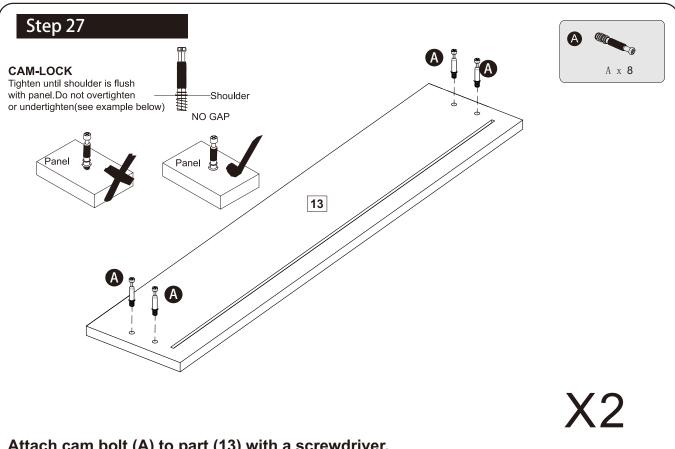

Attach cam bolt (A) to part (13) with a screwdriver.

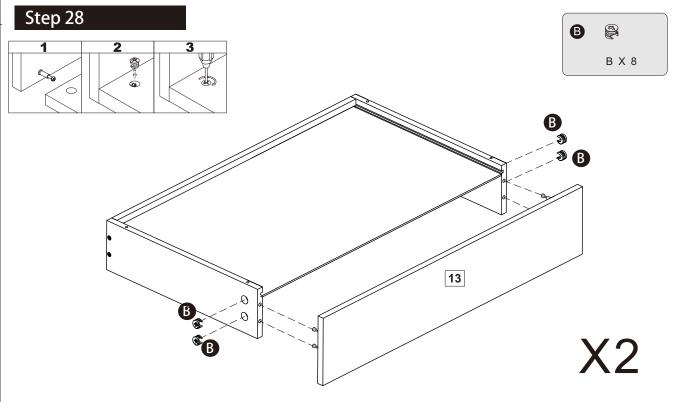


Connect the drawer panel (13) to the drawer side panel and insert the cam lock (B) and lock it.

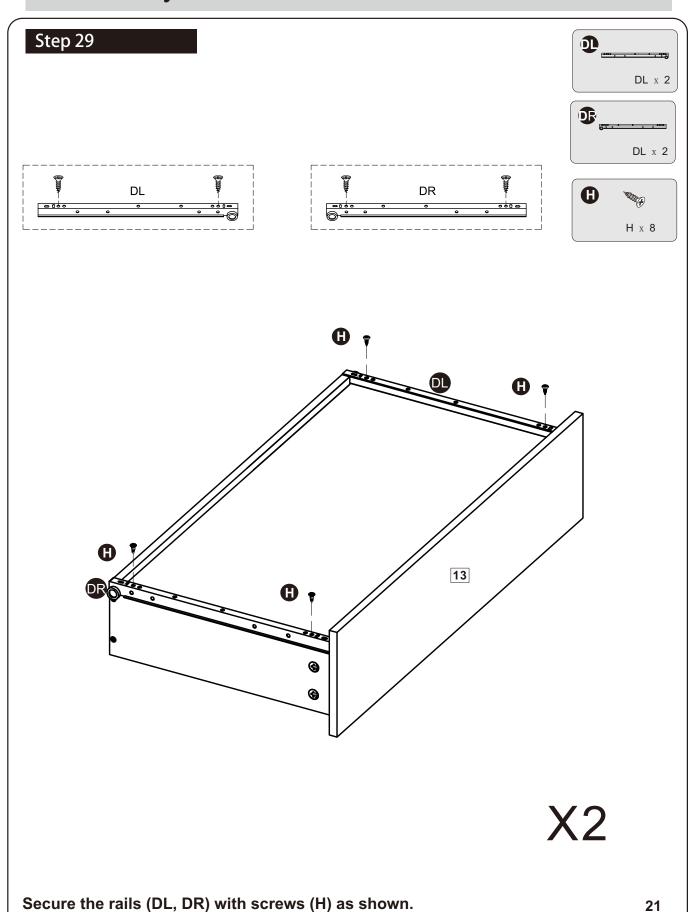


Step 30


Congratulation! You've made to the last step! But don't be too thrilled yet, put on the drawer can be frustrating if you do it wrong. So, take your time and follow the steps below.

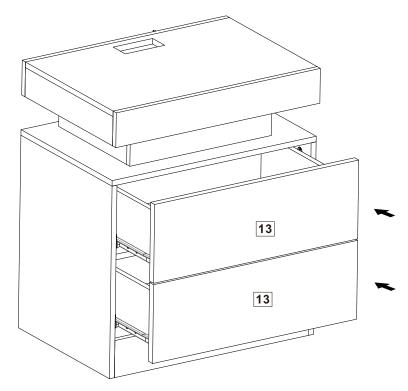


1.Please ensure that you have matched the wheels on BOTH sides of the drawer with the wheels on rails installed BEFORE push in the drawer.



2.If the following occurs, redo the first **two step**.



(both wheel are off the rails)



(one wheel is off the rail)

Insert the drawer as shown.

