
GAZEBO

Assembly Instruction - Please keep properly for future reference.

If you find any missing boxes, damaged parts, or accessory shortages, please contact the customer service team of your purchasing channel immediately. We will resolve the issue as quickly as possible.

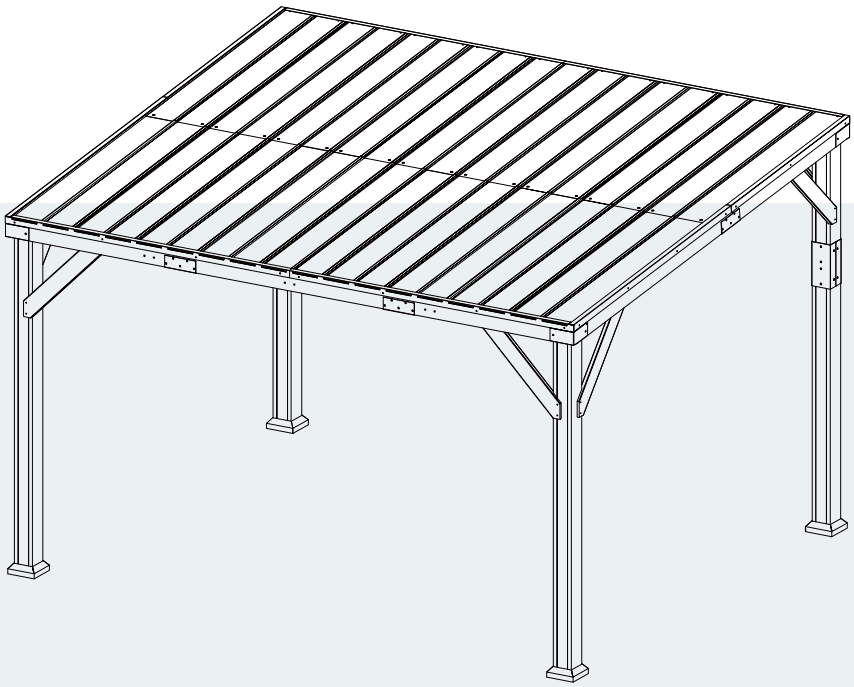

Arrive in 4 separate boxes and may not be part of the same shipment.
Please install the product after receiving all the packages.

10X12FT

CONTACT US

- **Email: service@gandtunnelcom**
  In order to receive assistance more quickly, please provide

THE FOLLOWING INFORMATION:

- Order number
- Purchase platform
- Purchase date
- Detailed description of the issue along with photos (if applicable)

EN

Important – Please read these instructions carefully before starting the installation.

BEFORE YOU START

Owner's Manual

Prior to installation, it is important that you contact your local government authority to determine if building approval is required. Study and understand this owner's manual.

Important information and helpful tips will make your construction easier and more enjoyable.

Assembly instructions

In structions are supplied in this manual and contain all appropriate information for your building model. Review all instructions before you begin. During assembly, follow the step sequence carefully for correct results .Please be aware: **requires four people and take 7-10 hours for installation.**


Parts

Check to be sure that you have all the necessary parts for the building.


Separate contents of the carton by the part number while reviewing parts list.

Familiarize yourself with the hardware and fasteners for easier use during construction. These are packaged within the carton. Note that extra fasteners have been supplied for your convenience.


TOOLS MY REQUIRED




Hammer




Screwdriver



Ladder




Electric screw driver




Wrench




This identifies information that requires special attention. Improper assembly could lead to an unsafe or dangerous condition.




Check that assembly is square before tightening bolts.



Check that set or assembly is properly level before proceeding.





IMPORTANT

How many people needed for the installation work

Requires Four people and take 7-10 hours for installation.

PLAN AHEAD

Site Selection

l Avoid overhanging trees as much as possible as leaves will make regular cleaning necessary and broken branches are a potential hazard.

l Small trees, bushes or fences nearby can be helpful, acting as a wind break.

Site Preparation

The site must be prepared so that the base of the shed is level all round and checking with a spirit level is required.

The base can be constructed by treated timber or concrete,in order to stop the moisture getting into the shed.

The shed is not designed to be built onto lawn directly. Also the ground will get muddy during rainy days.

If a concrete pad is made, it is important that this slopes towards the edges to prevent water ingress.

Time must be allowed for any concrete or cement to dry before building the shed on top.

Bases can also be constructed from bricks, blocks, or mounted on a concrete pad.

The bricks or blocks should be cemented onto firm and level concrete footings and the greenhouse frame drilled and screwed to the base.

IMPORTANT NOTES:

Find someone to help you: it is much easier with someone to hold parts, pass tool sect. Also some steps require two people to lift structures together. This is not very heavy work so would suit most able-bodied people.

Allow plenty of time: rushing often causes errors and the re-doing of incorrect assemblies. If you have never built a shed before, it can take most of a day to carefully complete the construction.

Have the right tools to hand.

Safety clothing as recommended in the 'Tools' section.

Ideally let out the parts and check that all are present before commencing construction. Lay on cloths or plastic sheets if there is any risk of scratching the parts.

Tighten all nuts carefully, being sure not to miss any. Check the frame is square and using a spirit level to check that it is upright.

For your safety concern,please do not stand under the metal shed in heavy wind or snow days.

For safety, please use expansion screws to reinforce the posts to the ground.

Please clear the snow o ffthe roof in time for the heavy snowfall.

Make sure all screws are tightened before use.

Repeat to confirm all screws, buckles and straps every 90 days.

Please keep all screws loose during the assembly process and tighten them after completing the installation.

Do not use or store objects in the Metal Shed with open flames or flammable chemicals.

Please note that some parts have sharp edges and should be handled with gloves.

If any parts are missing, broken, damaged or worn, discontinue use of the product until repairs are made or factory replacement parts are installed.

Installation of the product in a manner that does not conform to the manufacturer's instructions may result in the loss of the warranty policy for this product.

CUSTOMER SERVICE GUIDE

Thank you for choosing our product! We are committed to providing you with excellent service. If you find any missing parts, damaged packaging, or product damage after receiving all packages, please follow the steps below to quickly contact our customer service team. We will do our best to resolve your issue.

1. Missing Parts

Verify Parts:

1. Refer to the “Parts List” in the manual to verify the name, specifications, and quantity of the missing parts.
2. Take a clear photo of the parts list and mark the missing parts with detailed information, e.g., “Missing 5 pieces of M6x30mm screws.”

Contact Us:

· By Email:
Send an email to service@grandtunnel.com, with the subject line “Missing Parts Issue.” Include the following in the email:
· A description of the missing parts and a photo of the parts list.
· Order details (order number, purchase platform, purchase date).

2. Product or Packaging Damage

If it affects normal use:

Steps:

1. Take clear photos or videos showing the damaged parts and the extent of the damage (multi-angle shots are recommended).
2. Email the photos/videos along with other details to service@grandtunnel.com, with the subject line “Product Damage Issue.”

Resolution:

After verification, we will arrange for a replacement part, product exchange, or refund as quickly as possible.

If it does not affect normal use:

Steps:

1. Contact our customer service team (by email: service@grandtunnel.com).
2. Provide a description of the damage and include relevant photos or videos.

Resolution:

We will provide repair guidance or an appropriate compensation plan based on the specific situation.





Contact Us:

· Customer Service Email: service@grandtunnel.com





Helpful Tips






To process your issue efficiently, please prepare the following information:
· Order details (order number, purchase platform, purchase date).
· Clear photos or videos.
· We are committed to providing quick and professional solutions, no matter the size of the issue, to ensure your satisfaction.
Thank you for your trust and support! We hope you enjoy using our product!





Parts List (Box 1)









22	38	34	42	43
				
×2	×1	×1	×1	×1

Parts List (Box 2)



20	31	35	36	37
				
×2	×2	×1	×1	×1

39	40	41	44	45
				
×1	×1	×1	×2	×1









46	47	48	49	B1
				
×1	×1	×1	×2	×12

B3 	B4 	B5 	C1 	C2 
×3	×3	×3	×4	×4
C3 	H5 	H6 	H7 	H8 
×4	×1	×1	×1	×1
S 				
×8				

Parts List (Box 3)

E1 	E2 	E3	E4	F1 
×3	×3	×4	×2	×1
F2 	F3	F4	F5	F6
×1	×1	×1	×1	×1
F7	F8	Y1 		
×1	×1	×3		

Parts List (Box 4)


T 				
×18				
AA  M6x110	BB  M6x20	CC  M6x30	FF  M6x20	GG  M6x15
×16+1	×58+3	×42+3	×54+3	×12+1
H4  M5x25	H5  M6	H8  M6x30	H9  M8	JJ  M8x170
×22+3	×32+5	×32+5	×44+5	×16+1
KK  M6	LL  M8	HH  M6x35	RR  M4x16	UU  M6x80
×18+2	×16+2	×9+2	×74+8	×8
PP  D8x180	Z1  M6	Z2  M6	Z3  M8	Z4  M8
×8	×2	×2	×2	×2

1


As shown in the figure, first slide the ground nail cover (C1) onto the bottom of the column (22), then insert the ground nail plate (C2) into the bottom of the column (22), and fix it with lock (H4).




22 x2




C1 x2




C2 x2

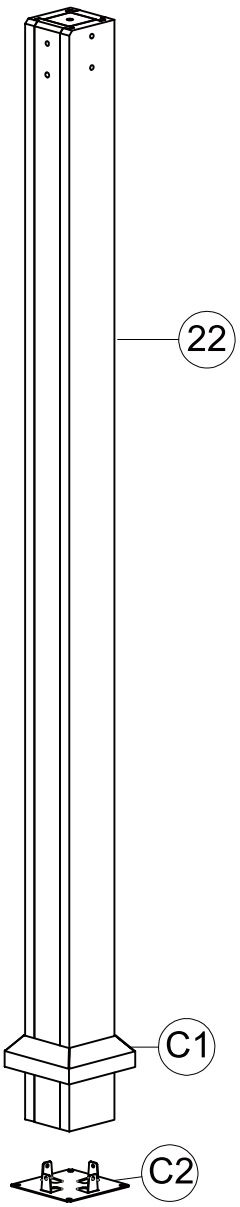

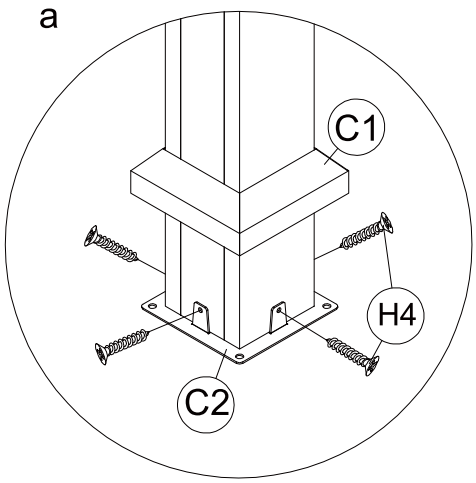

x2

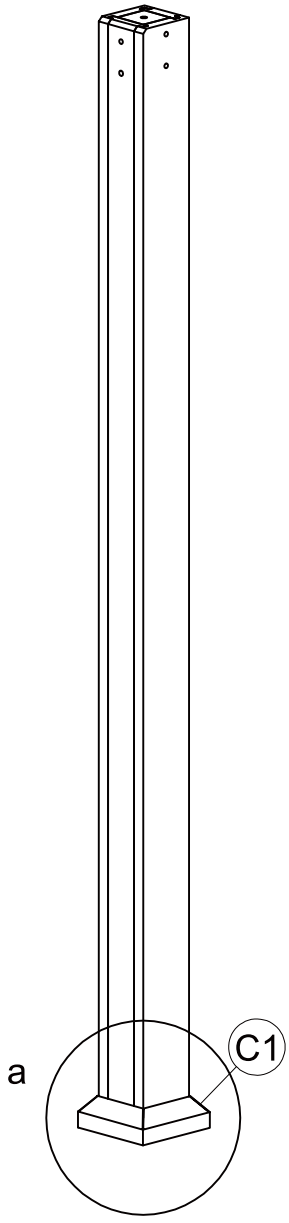


H4 x8



M5x25

2

As shown in the figure, first slide the ground nail cover (C1) onto the bottom of the lower column (20), then insert the ground nail plate (C2) into the bottom of the lower column (20), and fix it with lock (H4).
Then align the upper column (31) with the lower column (22) and secure them through the column edging (C3) using locks (AA) and (BB).

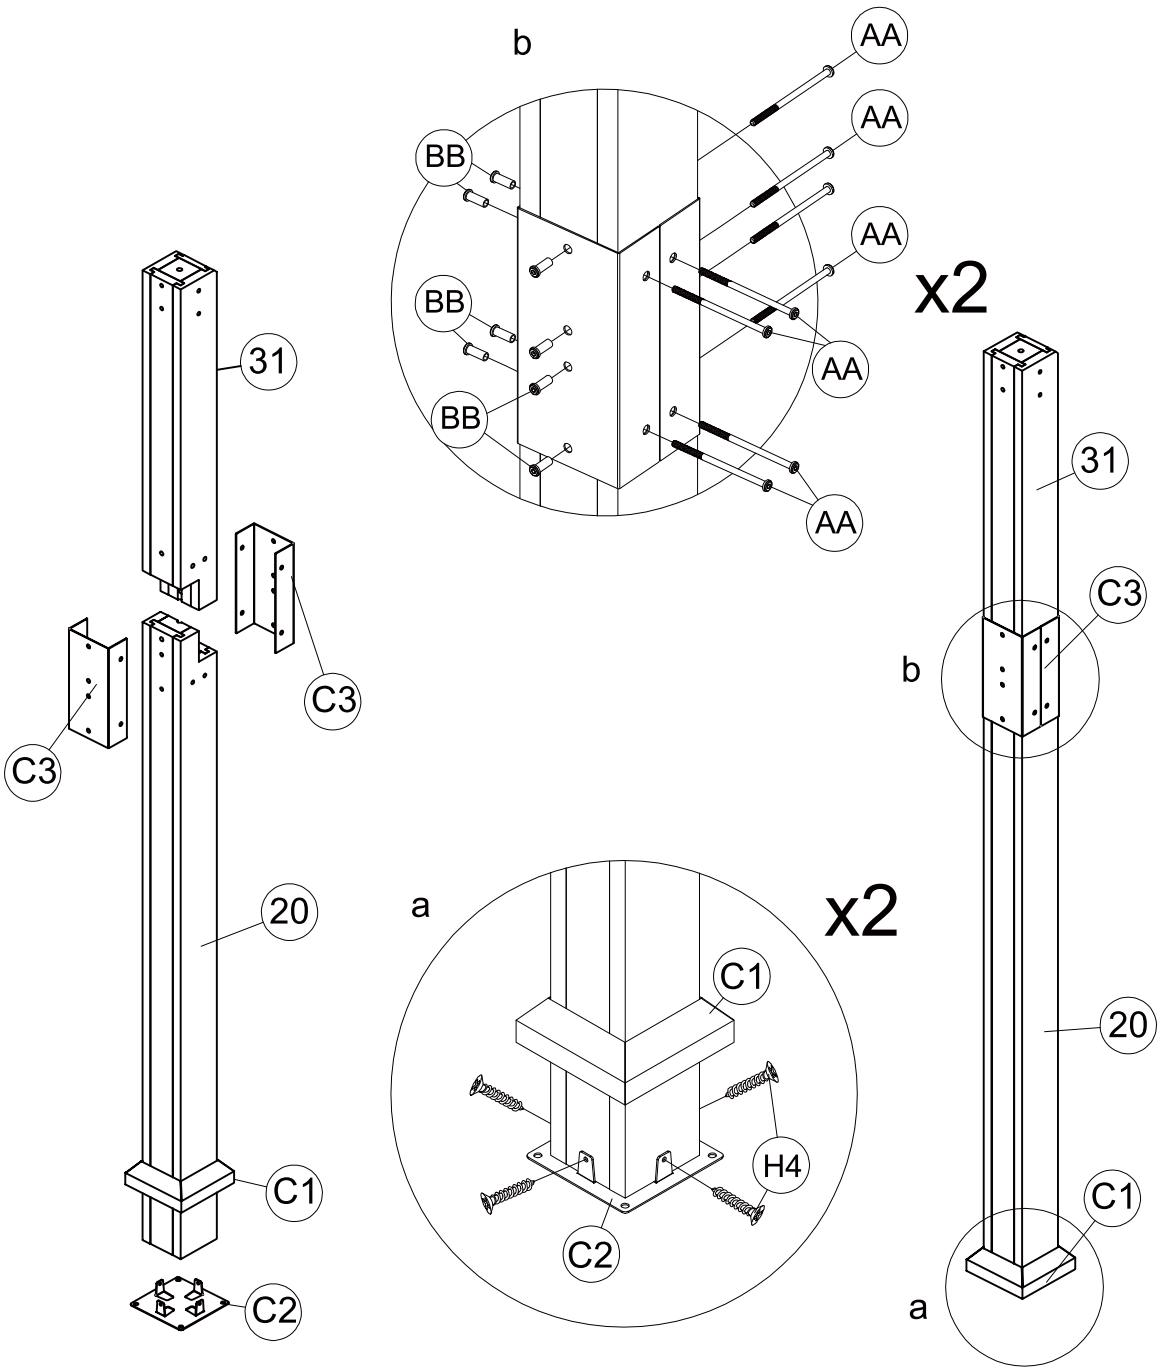

31 x2

20 x2

C1 x2

C2 x2

C3 x4

H4 x8	BB x16	AA x16
M5x25	M6x20	M6x110

3


As shown in the figure, connect the upper side beam left (41) and lower side beam left (43) with the beam connector (B1), align the holes, and fix with locks (CC) and (BB).




41 x1





43 x1



B1 x2

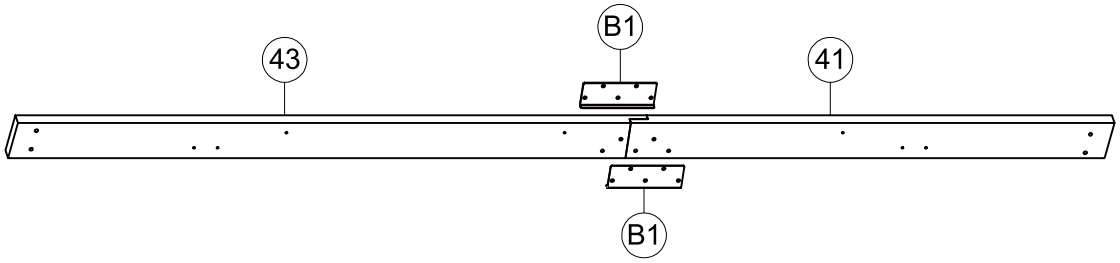

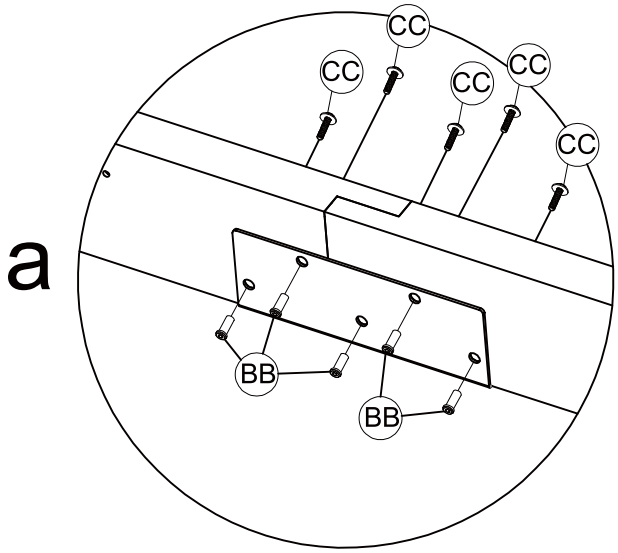

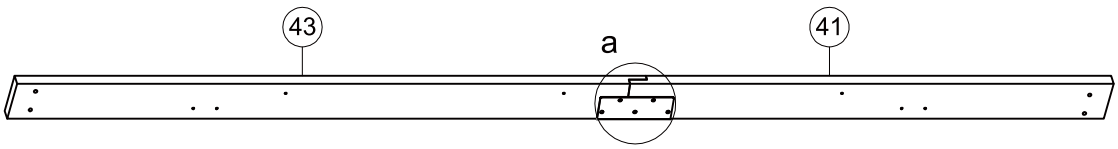

BB x5



M6x20

CC x5



M6x30

4


As shown in the figure, connect the upper side beam right (42) and lower side beam right (40) with the beam connector (B1), align the holes, and fix with locks (CC) and (BB).




40 x1





42 x1



B1 x2

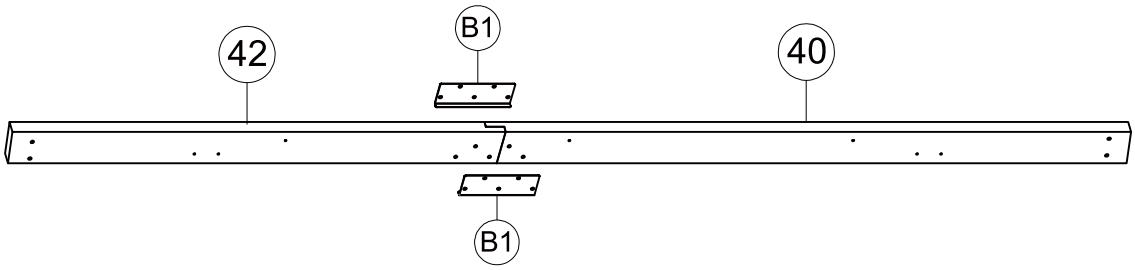

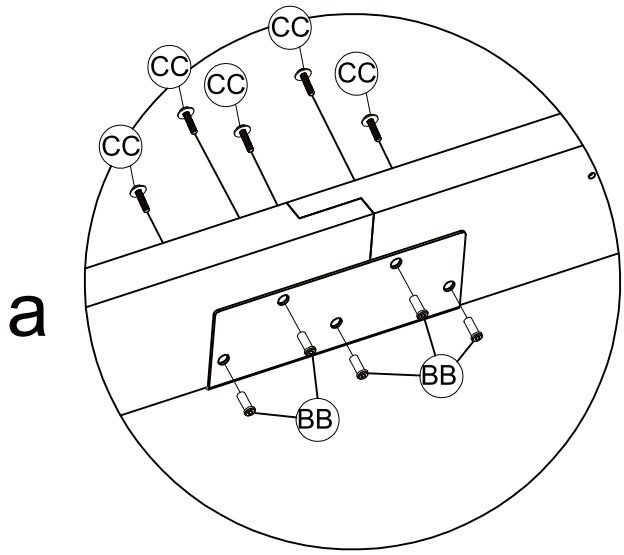

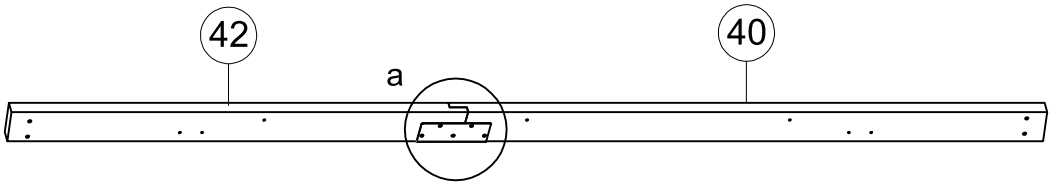

BB x5



M6x20

CC x5




M6x30

5

As shown in the figure, connect the lower beam left (35), lower beam right (36), and lower middle beam (34) with the beam connector (B1), align the holes, and fix with locks (CC) and (BB).




35 x1




34 x1





36 x1



B1 x4

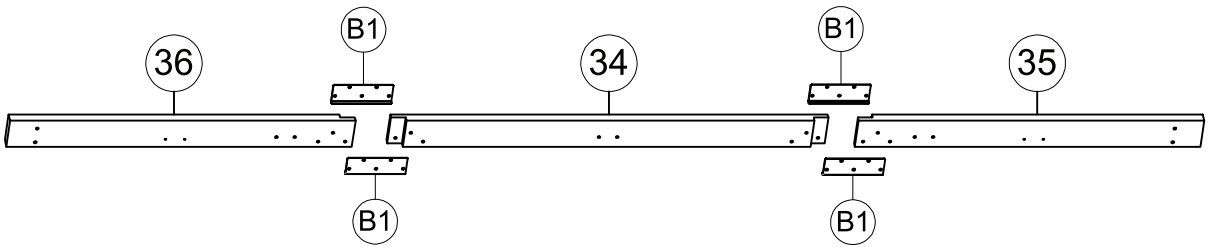

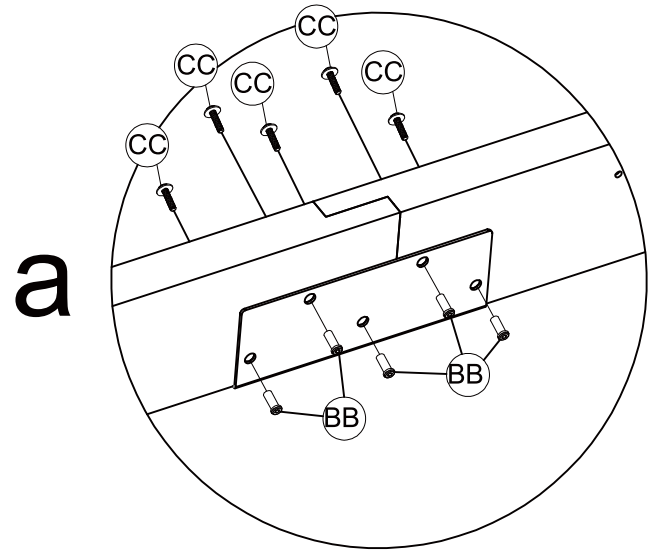

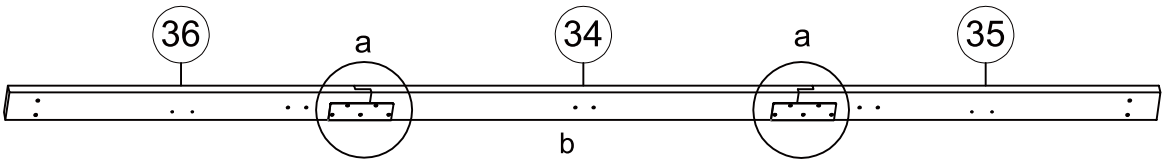

BB x10



M6x20


CC x10




M6x30

6

As shown in the figure, connect the upper beam left (37), upper beam right (39), and upper middle beam (38) with the beam connector (B1), align the holes, and fix with locks (CC) and (BB).




39 x1




38 x1




37 x1




B1 x4

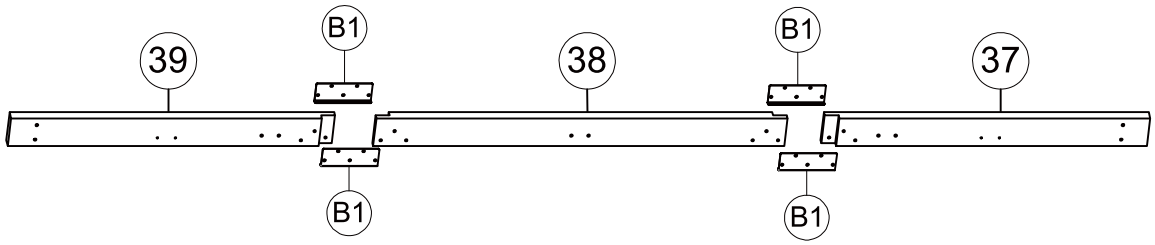

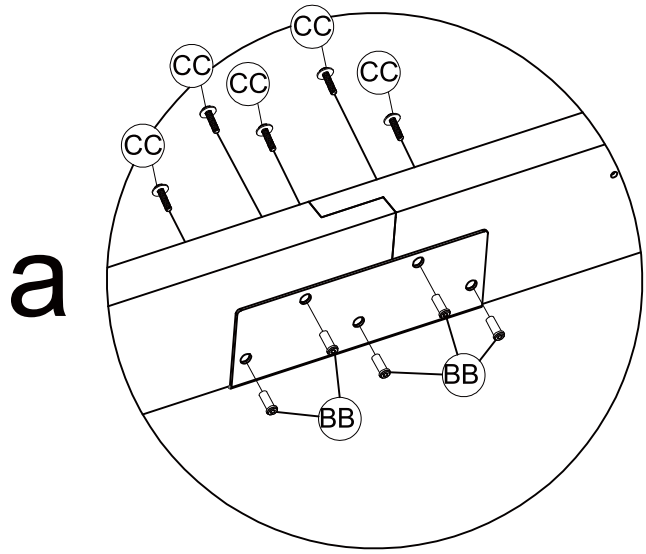

a

x2

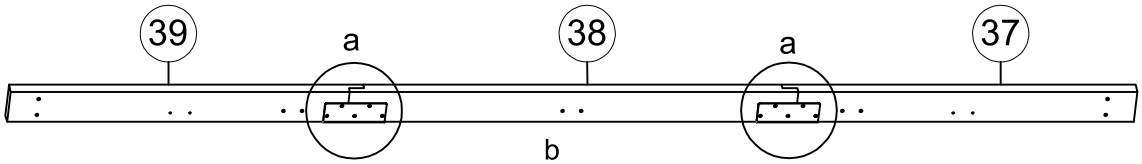

BB x10




M6x20

CC x10




M6x30


7	As shown in the figure, connect the assembly completed in Steps 1 and 2 with the assembly completed in Steps 5 and 6, align the holes, and fix with locks (JJ), (H9), and (LL).

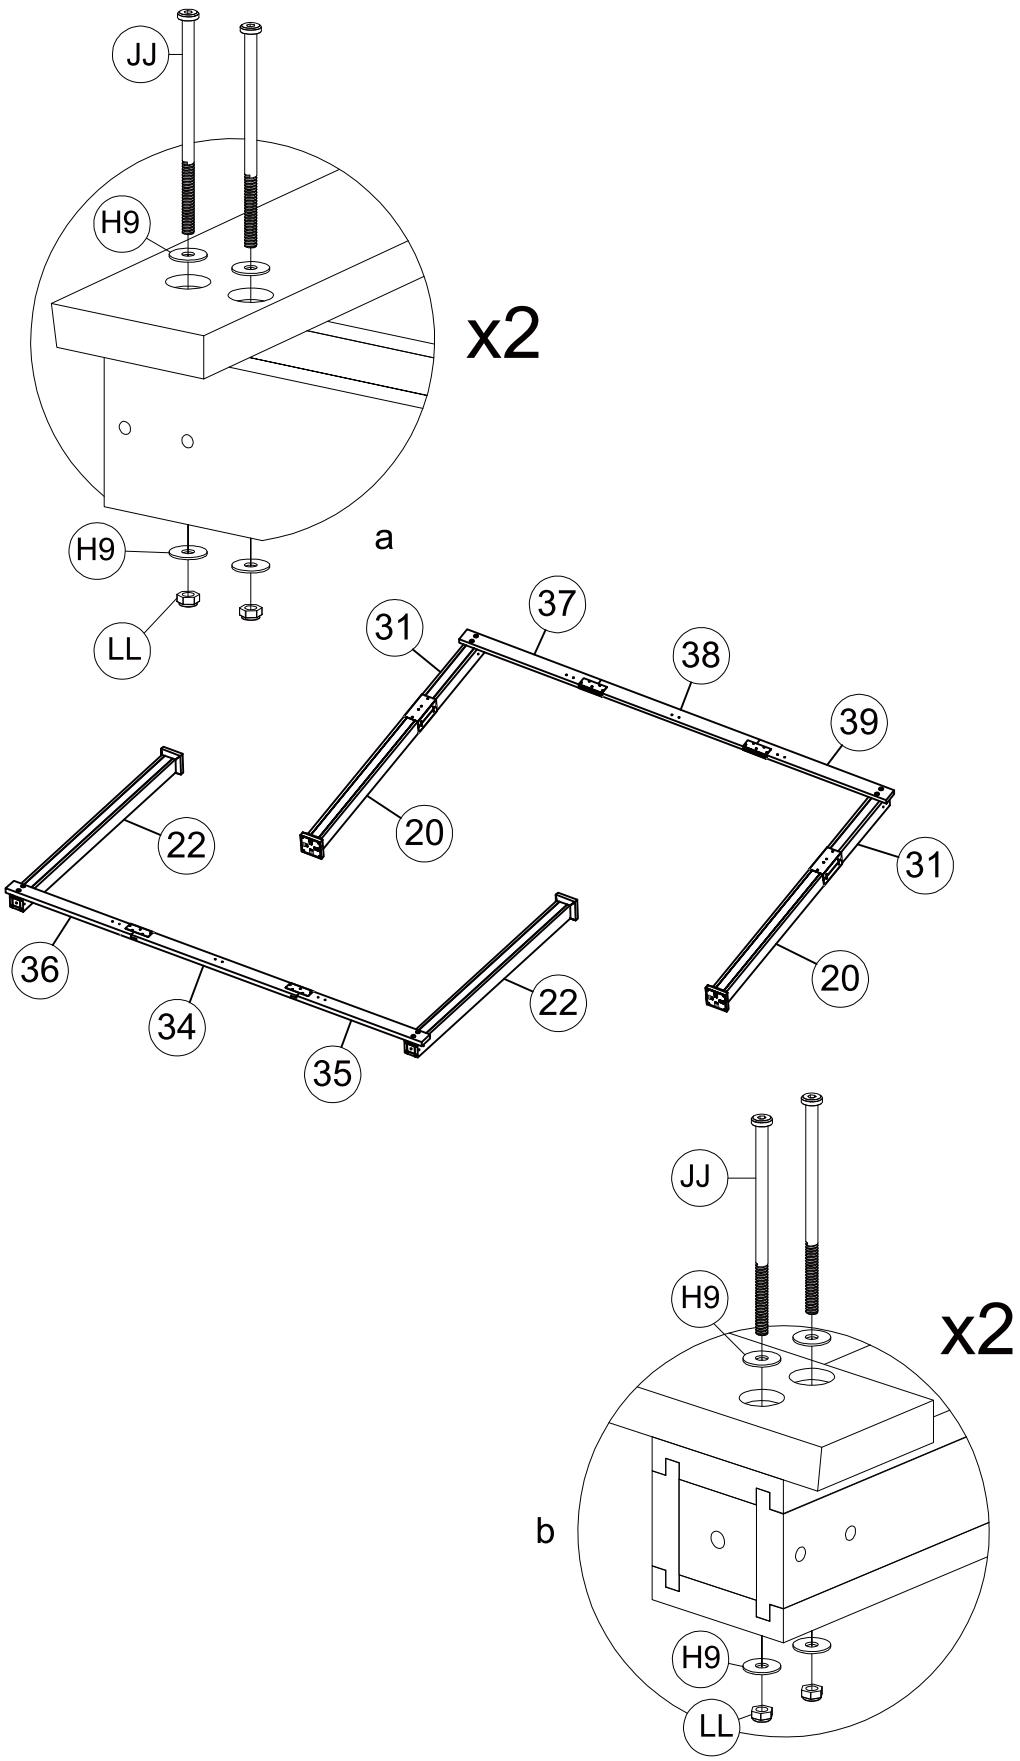


LL x8	H9 x16	JJ x8
M8	M8	M8x170

8	As shown in the figure, connect the assembly completed in Steps 3 and 4 with the assembly completed in Step 7, align the holes, and fix with locks (JJ), (H9), and (LL).

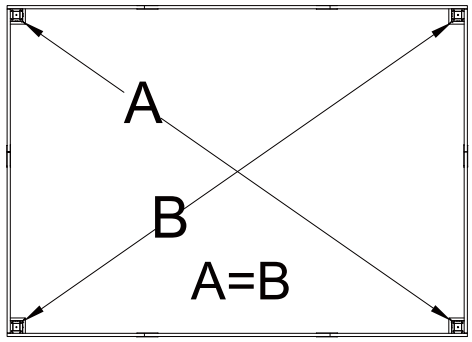

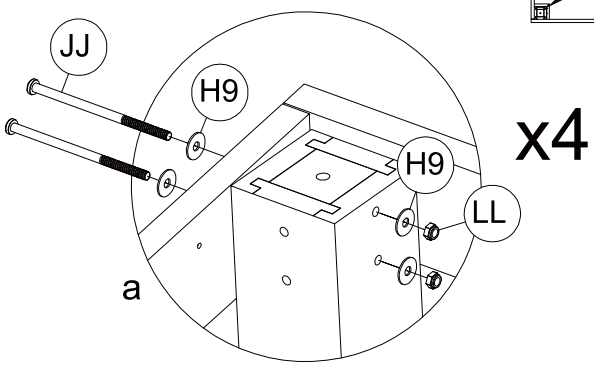


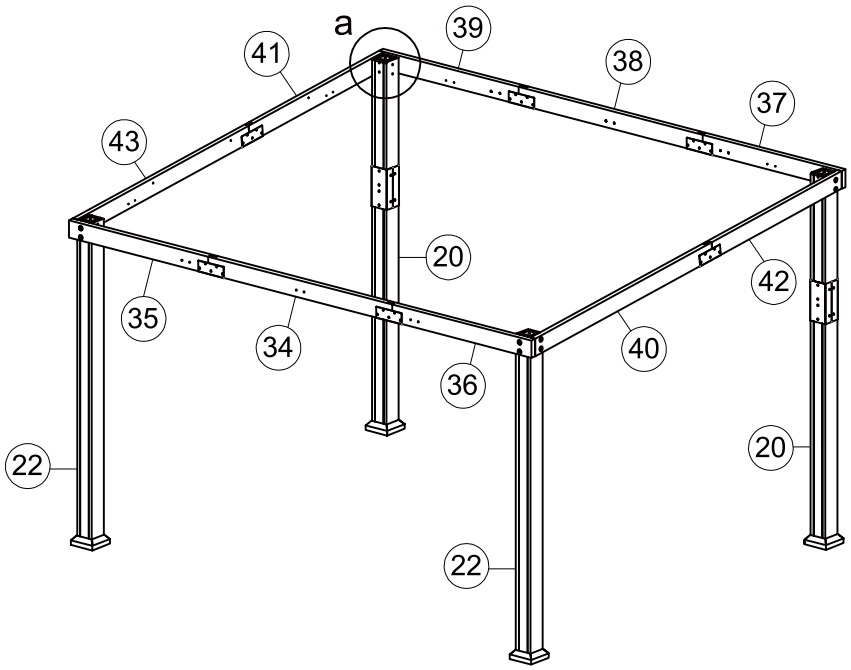


LL x8	H9 x16	JJ x8
M8	M8	M8x170

9


As shown in the figure, align the diagonal supports (44) and (49) with the holes, and fix with locks (H8) and (H5).





49 x2



44 x2

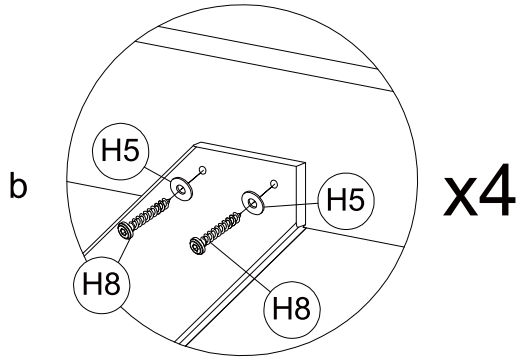

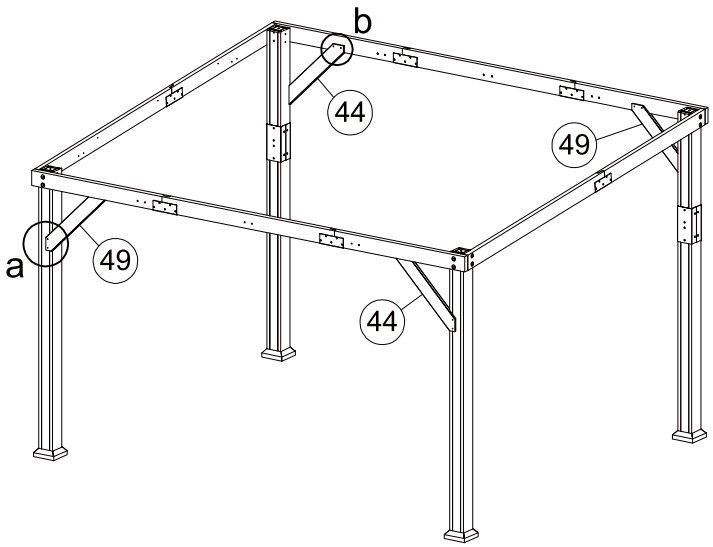


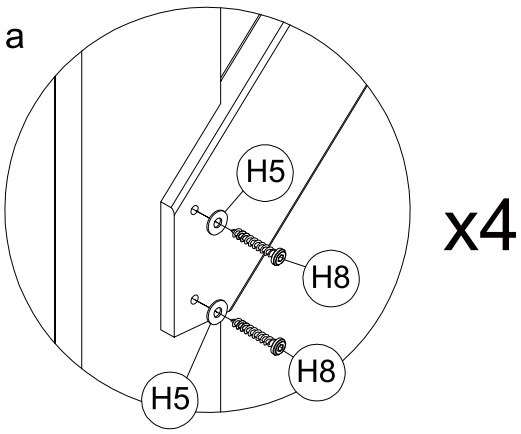


H8 x16	H5 x16
M6x30	M6

10

As shown in the figure, align the diagonal supports (45), (46), (47), and (48) with the holes, and fix with locks (H8) and (H5).




45 x1




46 x1





47 x1



48 x1

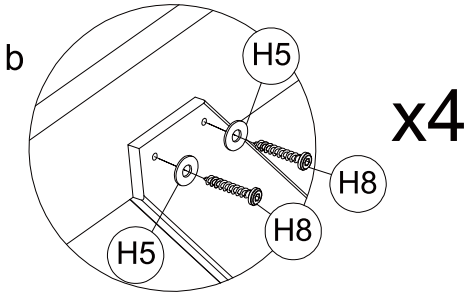

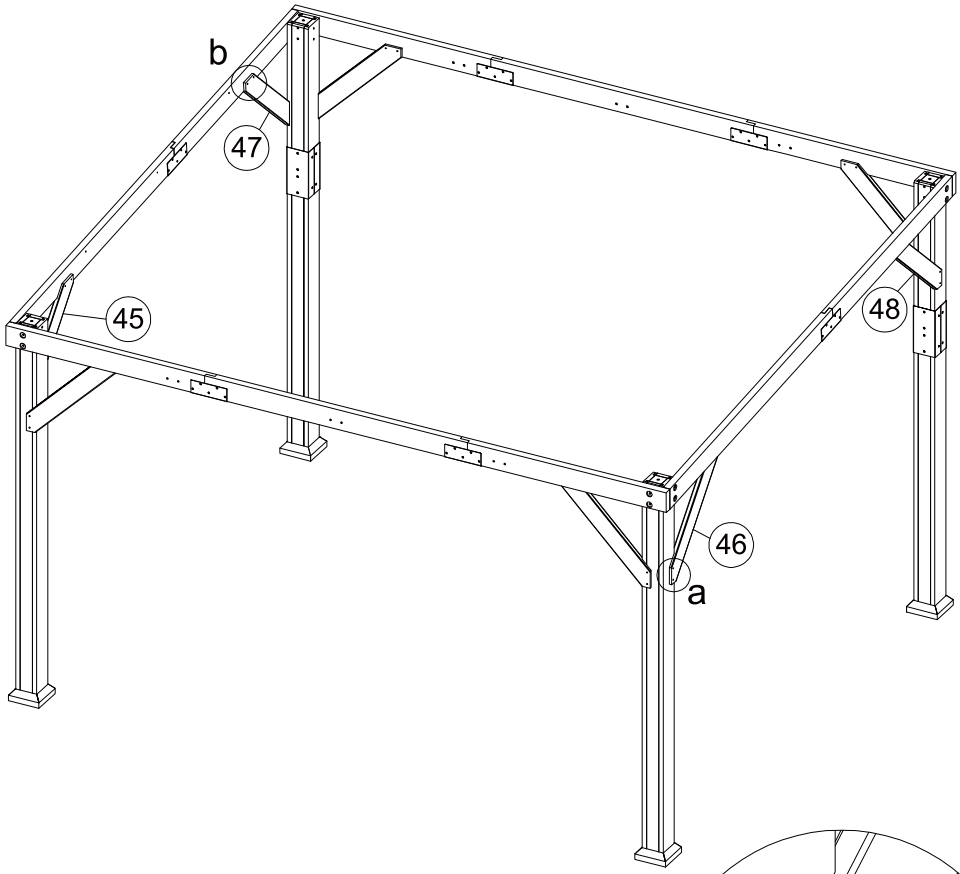

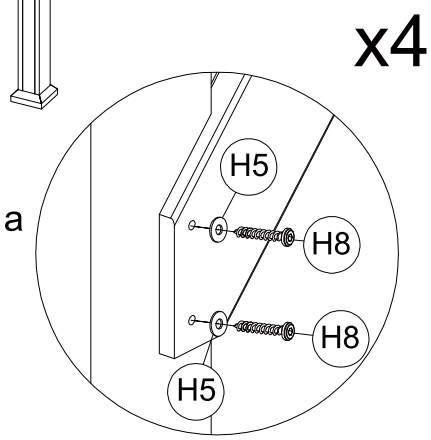

H8 x16	H5 x16
	
M6x30	M6


11




B4 x3



As shown in the figure, align the upper middle beam connector (B4) with the holes, and fix with locks (CC), (H9), and (BB).

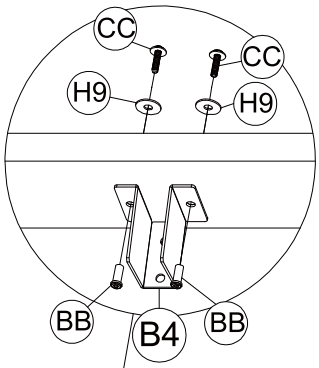

x3

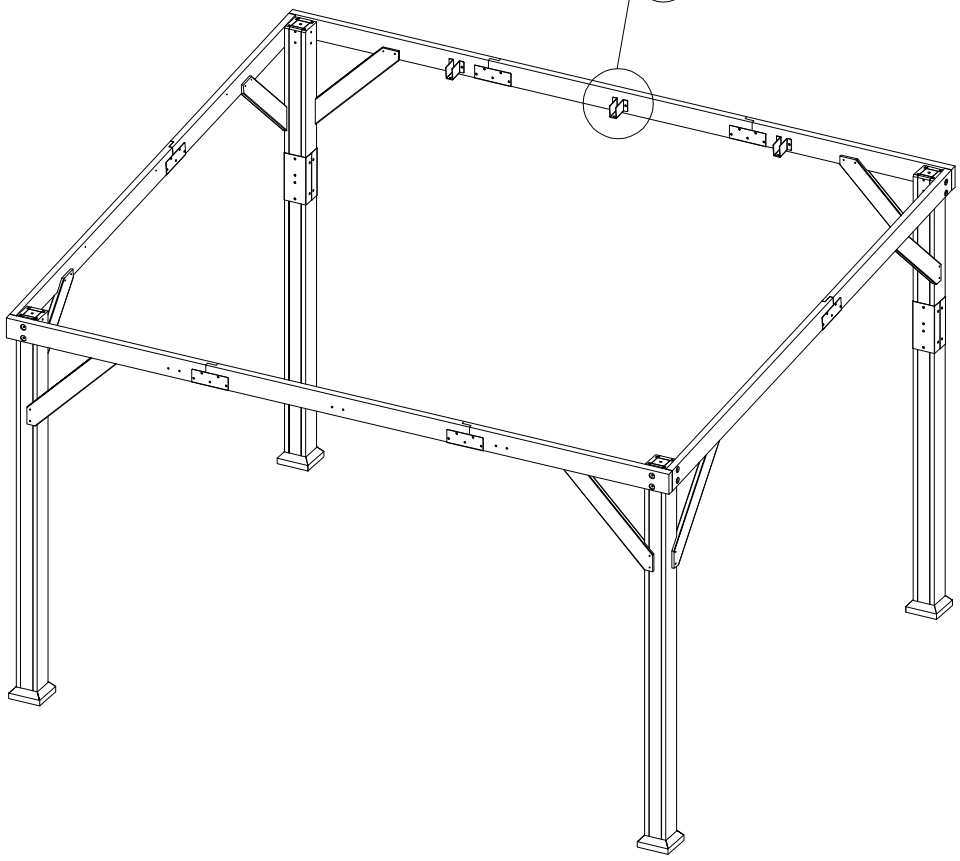


H9 x6	BB x6	CC x6
		
M8	M6x20	M6x30


12



B3 x3



As shown in the figure, align the lower middle beam connector (B3) with the holes, and fix with locks (CC), (H9), and (BB).

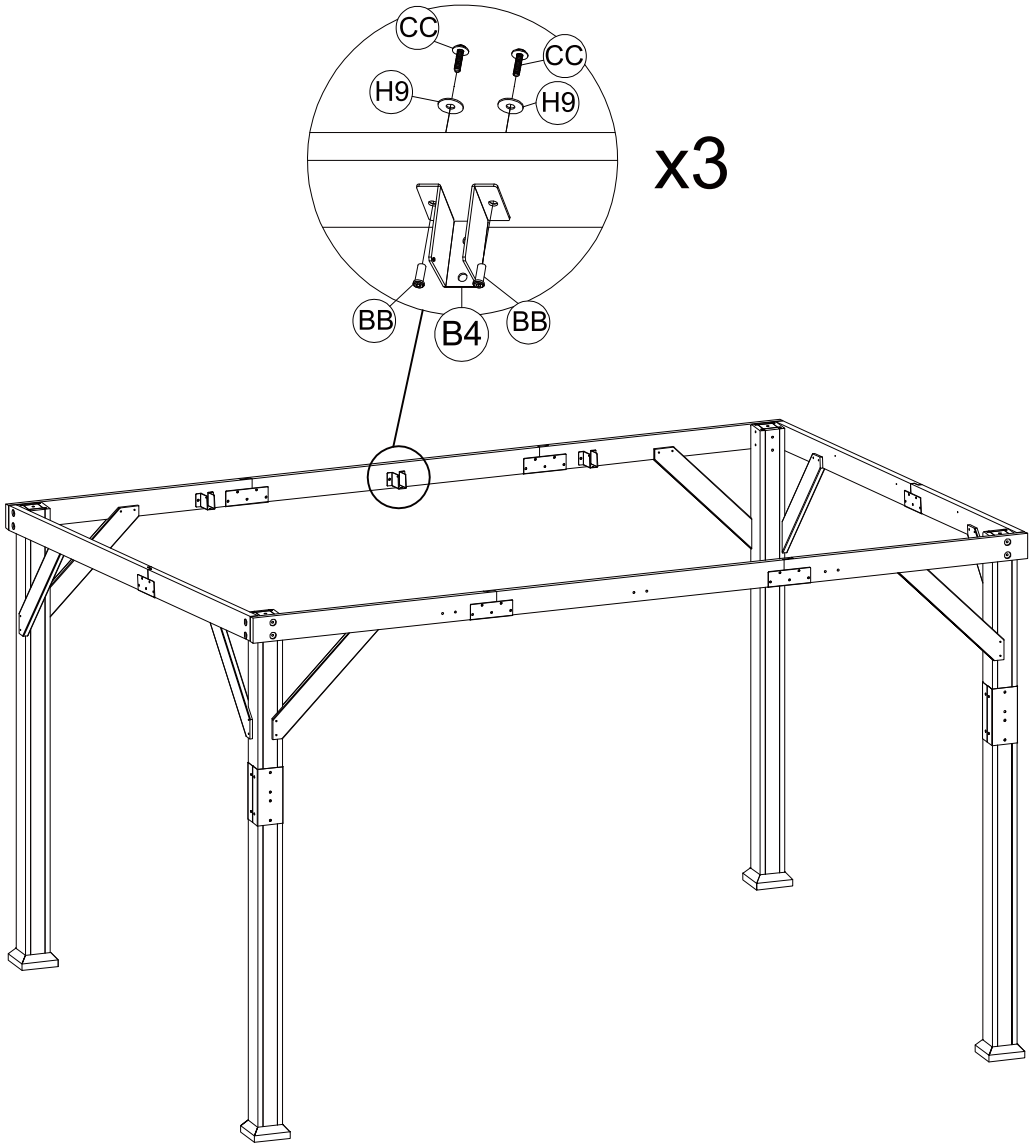


H9 x6	BB x6	CC x6
		
M8	M6x20	M6x30

13

As shown in the figure, connect the upper middle beam (E1) and lower middle beam (E2) using the middle beam insert (Y1), align the holes, and fix with lock (FF).




E1 x3





E2 x3





Y1 x3

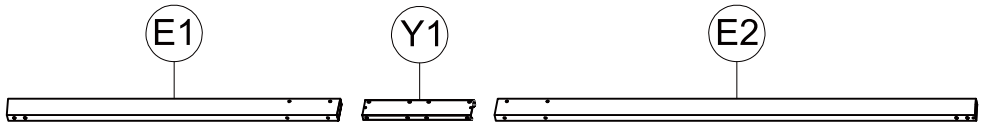

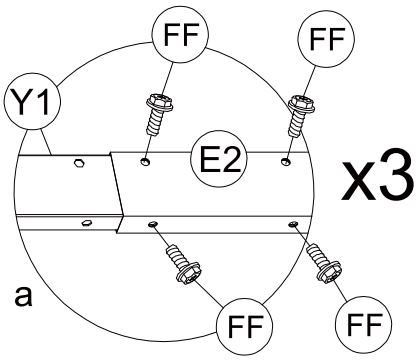

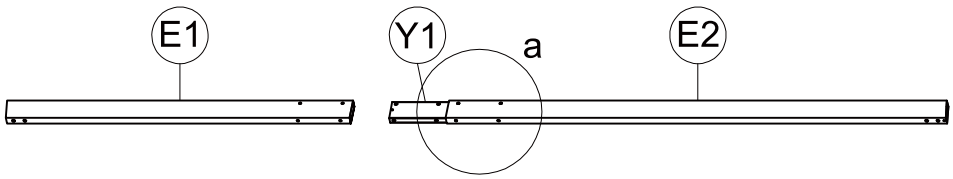

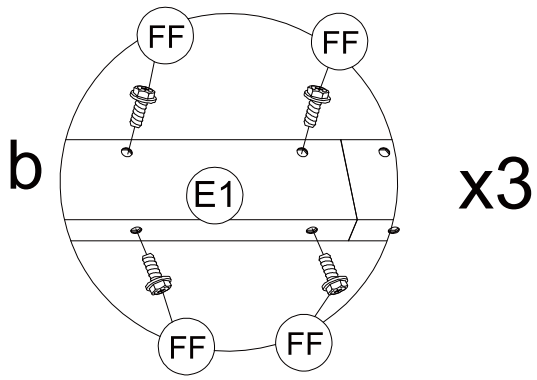

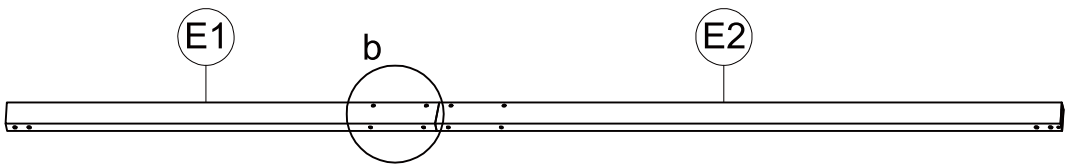


FF x24



M6x20

14	As shown in the figure, align the assembly completed in Step 13 with the holes, and fix with lock (FF).

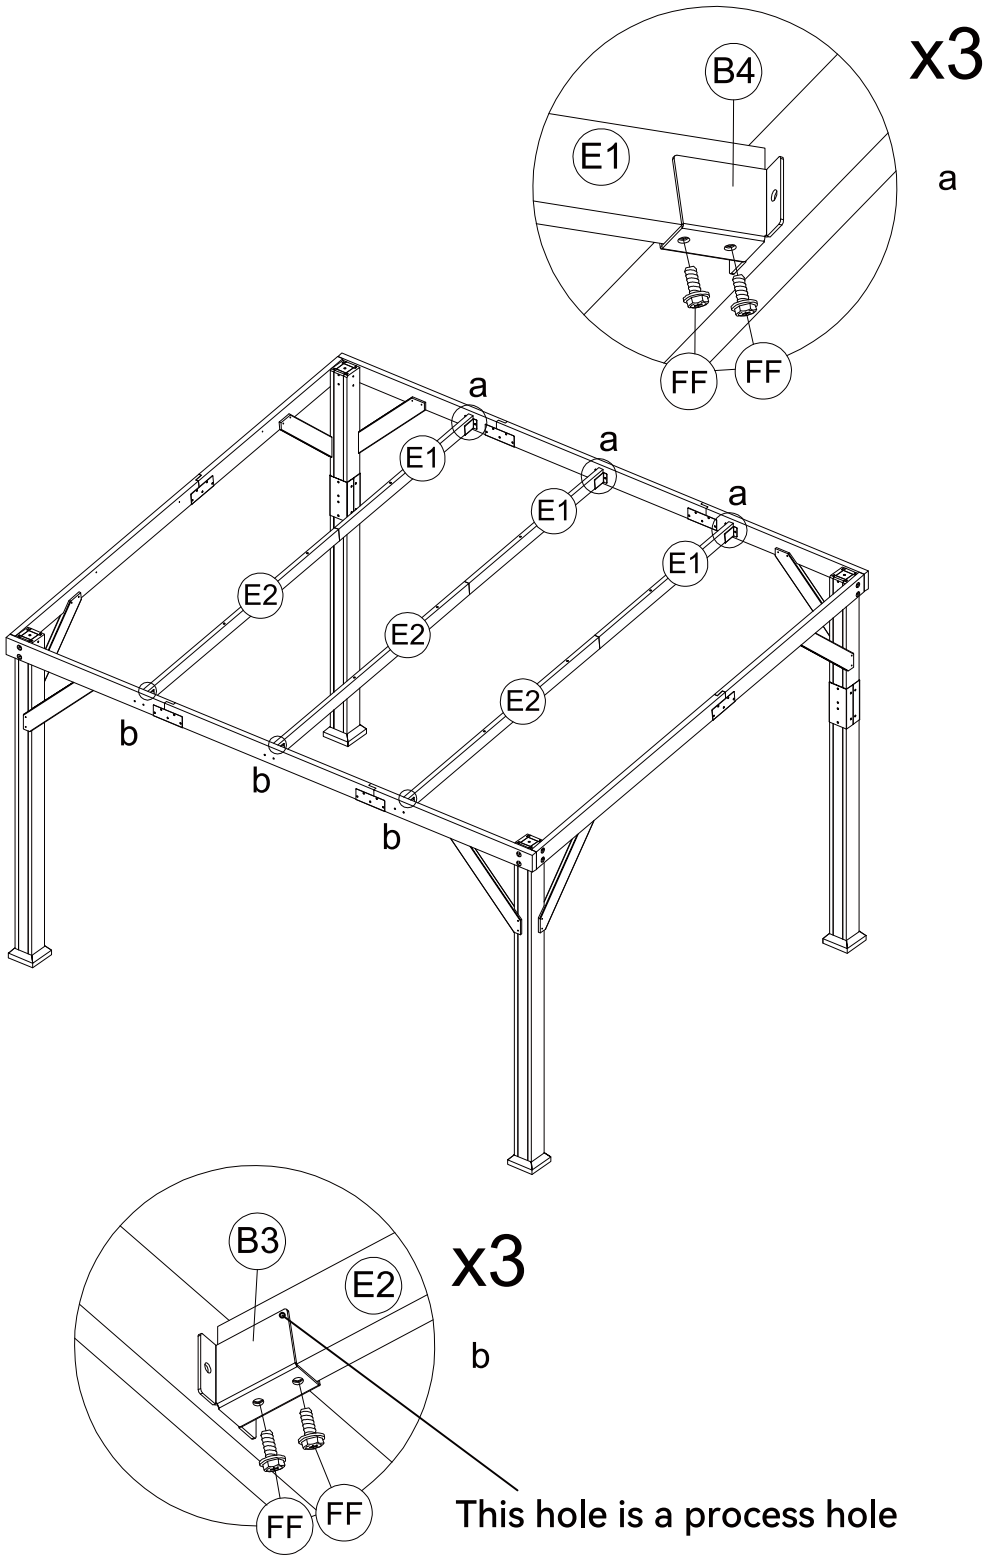


FF x12

M6x20

15





E3 x4





B5 x2

As shown in the figure, connect the top beam (E3) through the top beam insert (B5), align the holes, and fix with lock (GG).

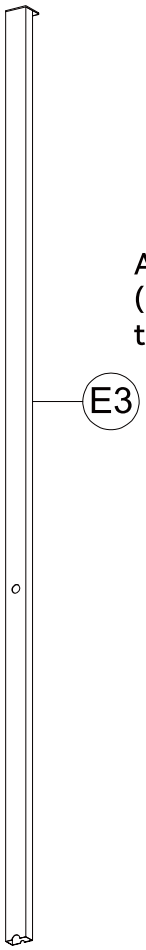




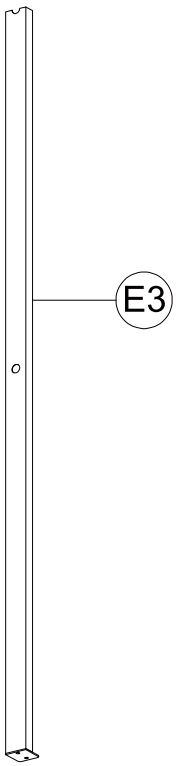

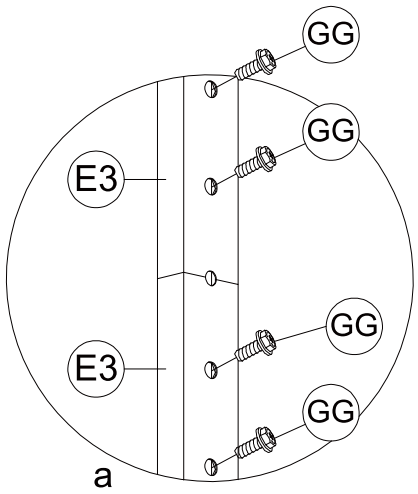

x2

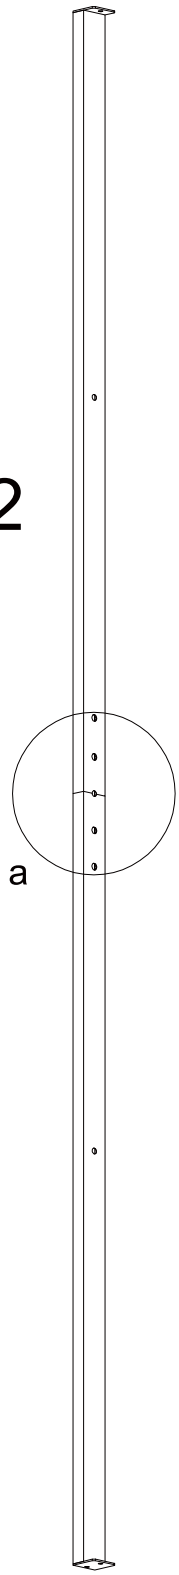


GG x8





M6x15


16

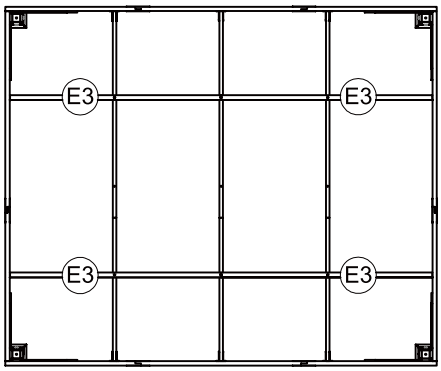


As shown in the figure, align the assembly completed in Step 15 with the holes, and fix with locks (H4) and (HH).

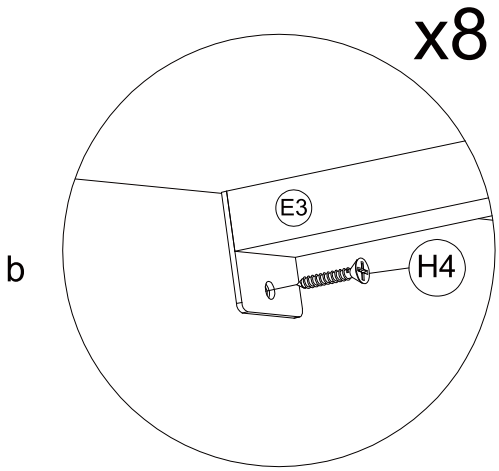

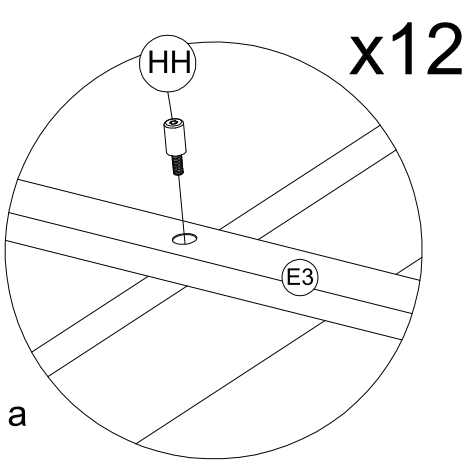


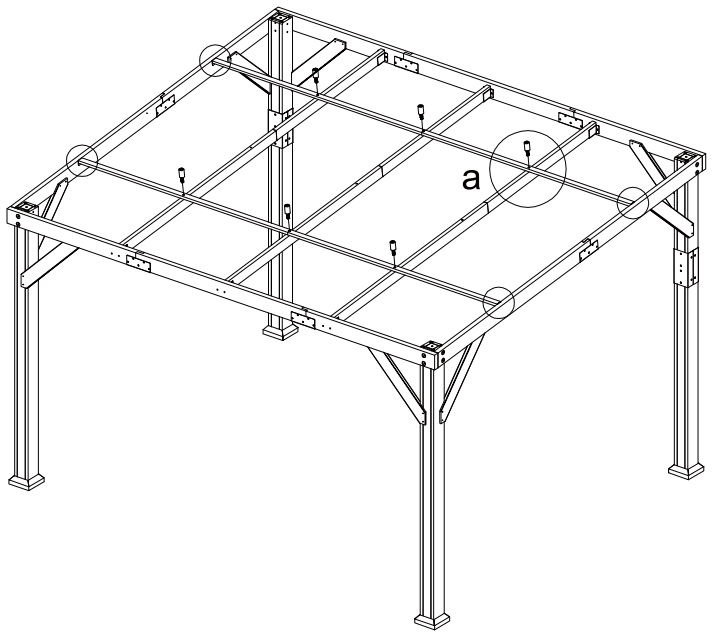


H4 x4	HH x6
	
M5x25	M6x35

17


As shown in the figure, connect the middle top beam (E4) through the top beam insert (B5), align the holes, and fix with lock (GG).




E4 x2




B5 x1

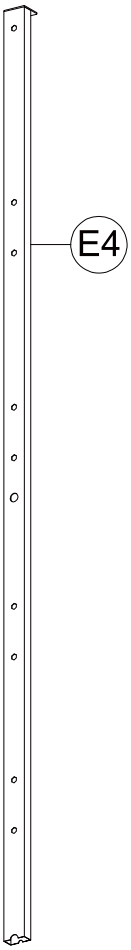

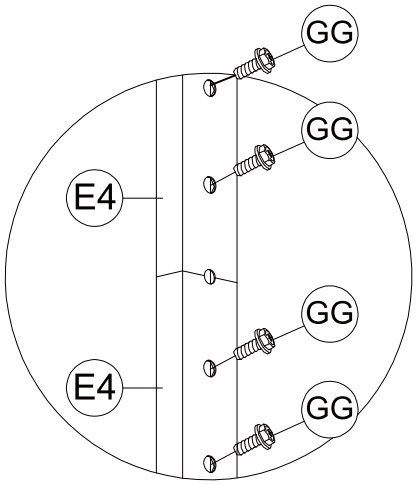

a

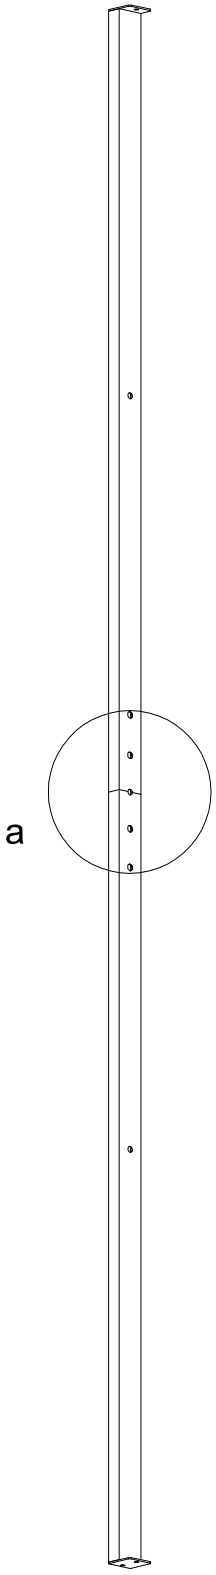


GG x4




M6x15


18	As shown in the figure, align the assembly completed in Step 17 with the holes, and fix with locks (H4) and (HH).

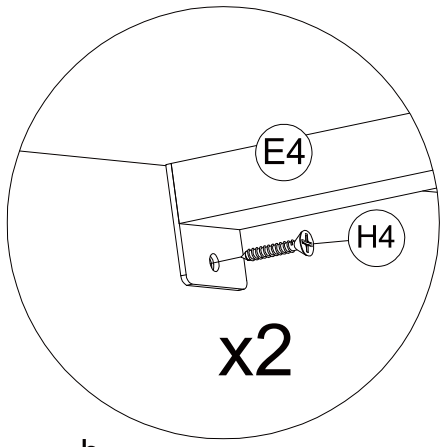

b

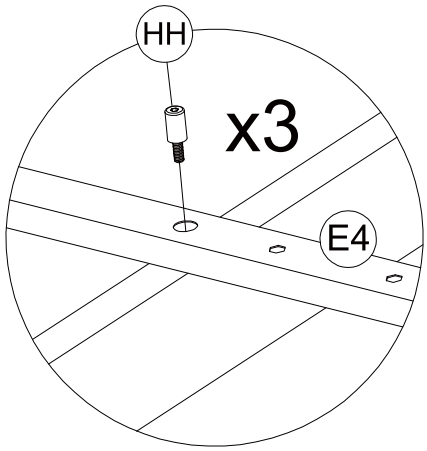


a

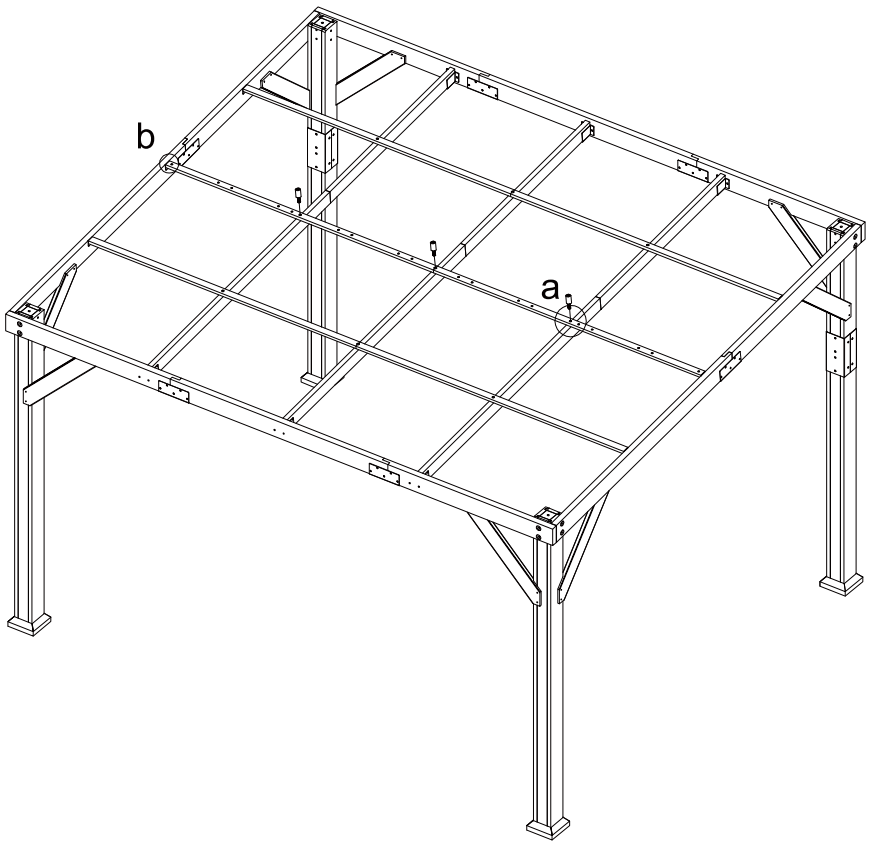

H4 x2	HH x3
M5x25	M6x35

19





T x18



S x8


Place the cover plate (T) as shown in the figure, then position the pressing strip (S) over the holes, and fix with locks (FF), (KK), and (RR).

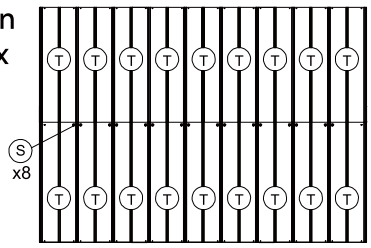




x9


a




x8

c

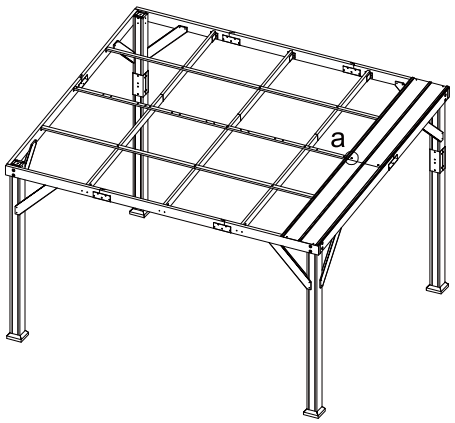


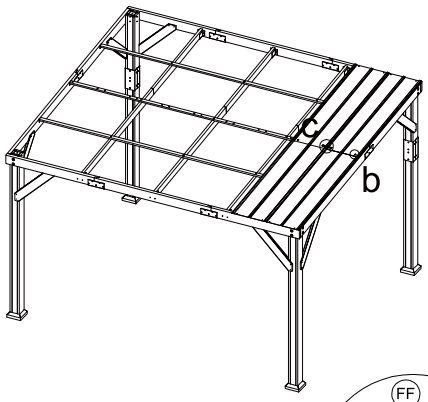



b

x2

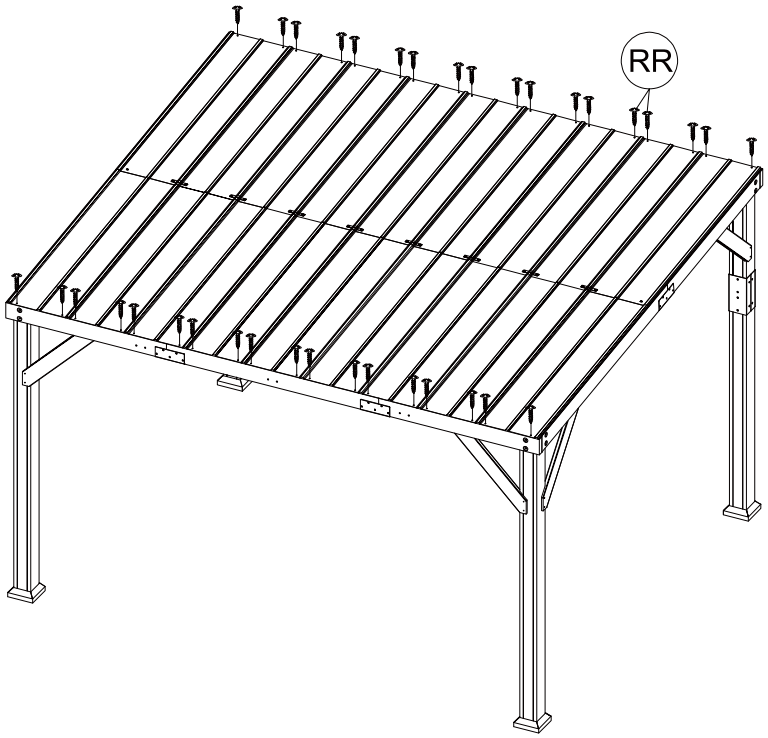

KK x18	RR x36	FF x18
		
M6	M4x16	M6x20

20

Place the upper side panels left (F1) and right (F2), and the lower side panels left (F3) and right (F4) as shown in the figure, and fix with lock (RR).



F1 x1




F2 x1




F3 x1



F4 x1

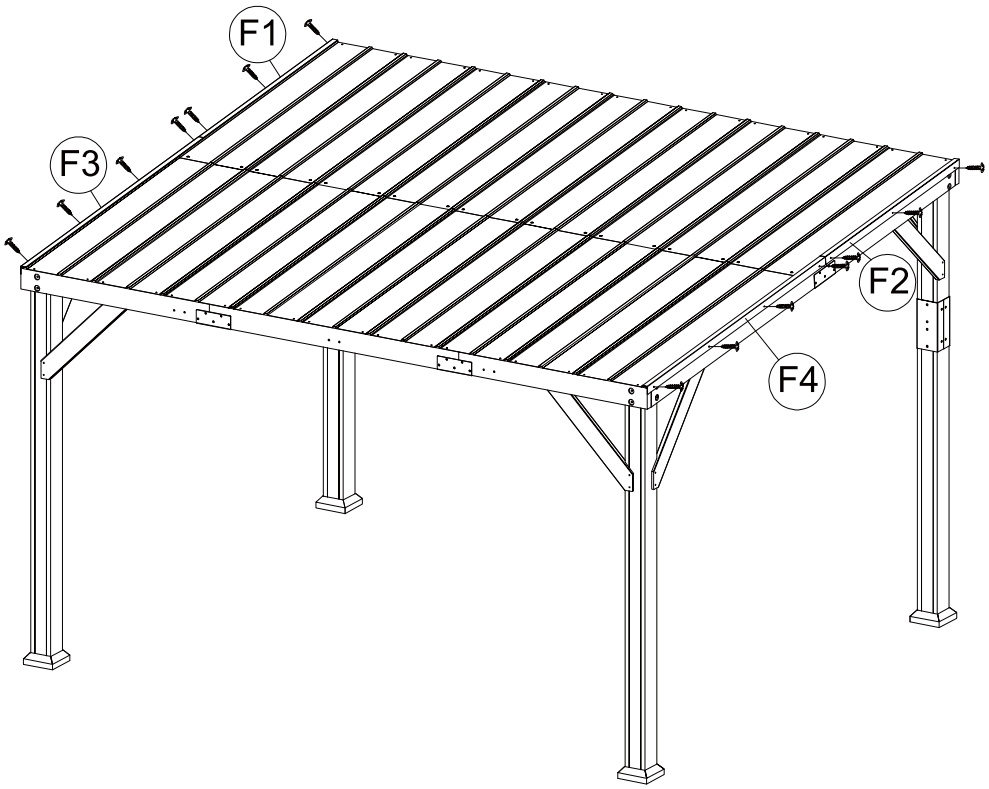

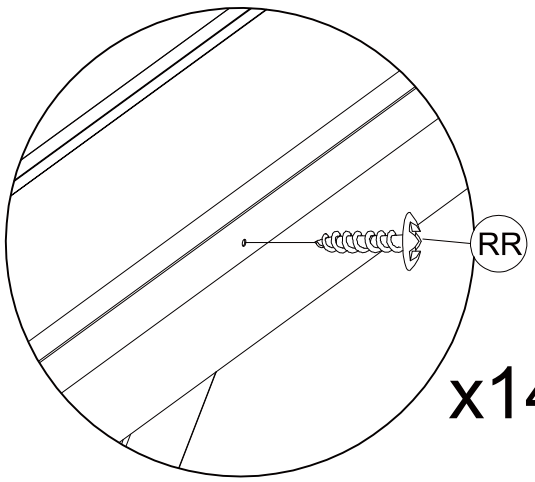

x14


RR x14




M4x16

21

Place the upper panels left (F5) and right (F6), and the lower panels left (F7) and right (F8) as shown in the figure, and fix with lock (RR).



F5 x1




F6 x1



F7 x1



F8 x1

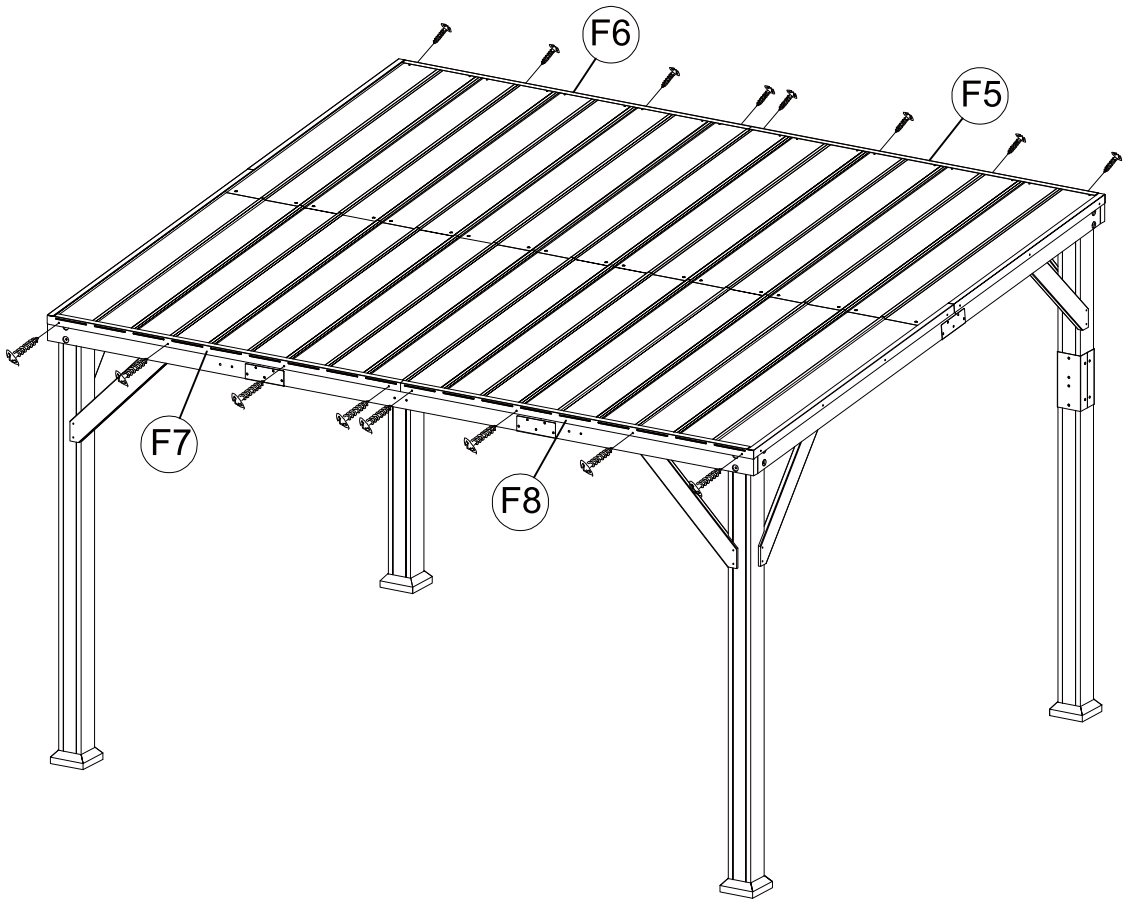


RR x16




M4x16

22


Place the upper corner panels left (H6) and right (H5), and the lower corner panels left (H7) and right (H8) as shown in the figure, and fix with lock (RR).




H5 x1




H6 x1





H7 x1



H8 x1

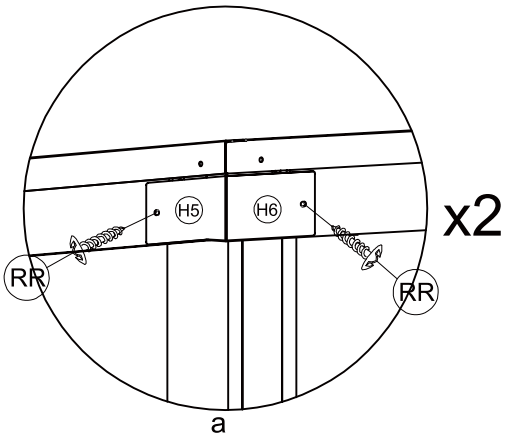

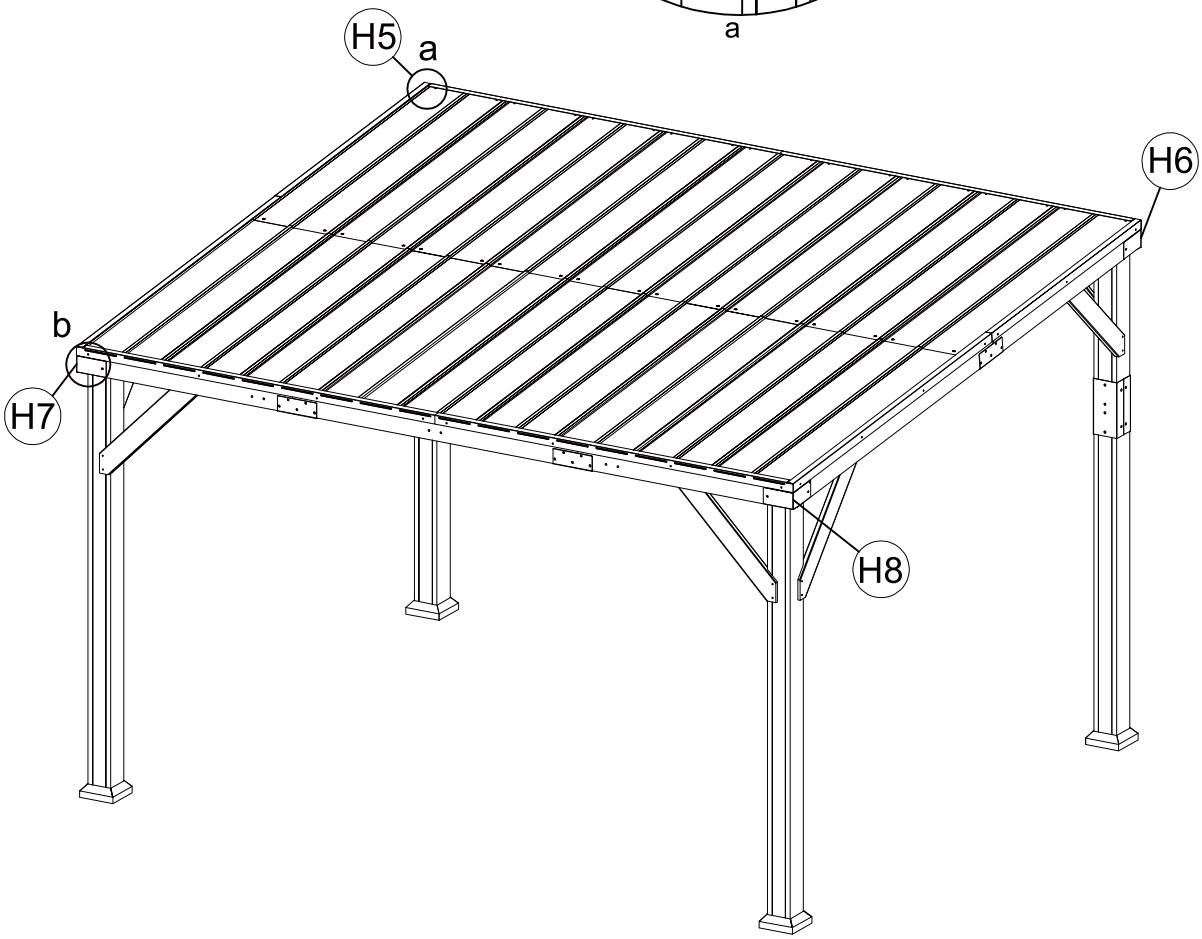

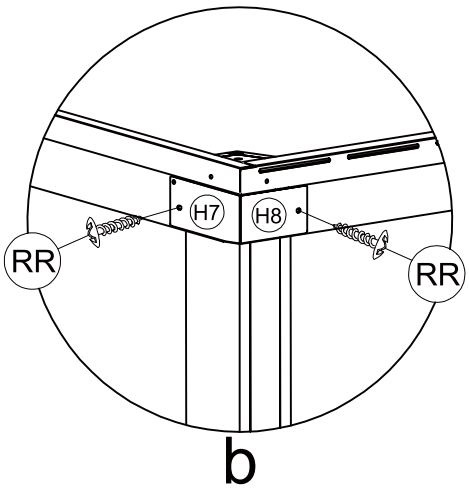



RR x8




M4x16

23

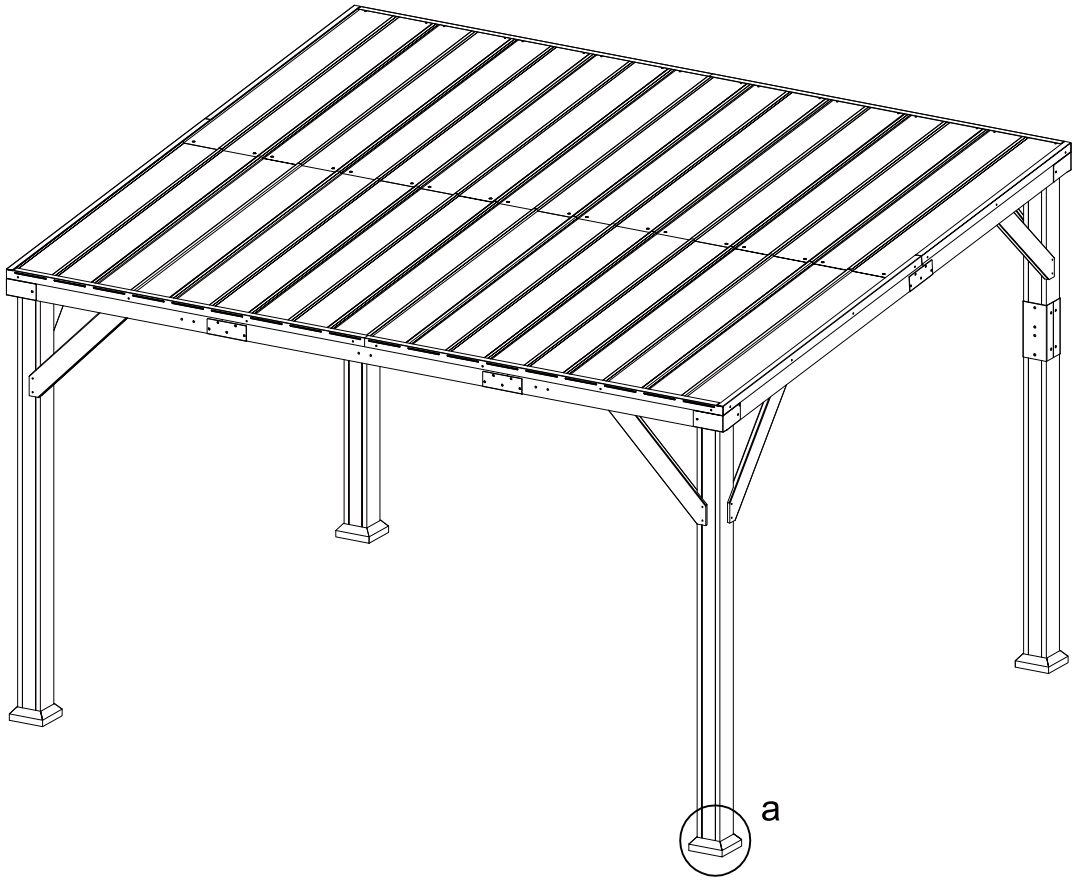




x4

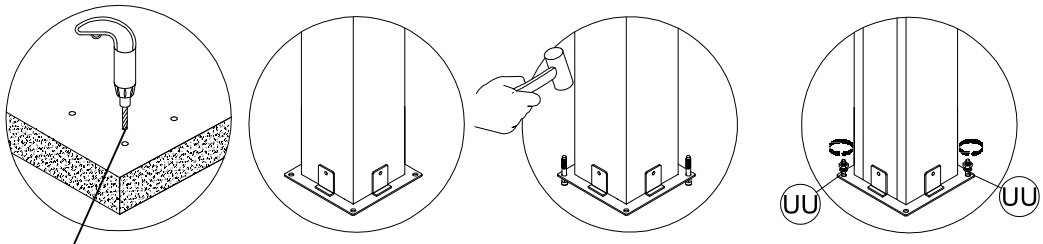


Drill size ≥Ø10

UU x8



M6x80

PP x8



D8x180

Gazebo

SKU
BH02X5-1A1A1
BH02X5-1A1A2
BH02X5-1A1A3
BH02X5-1A1A4

V1.0