


Cabinet

Assembly Instructions - Please keep for future reference

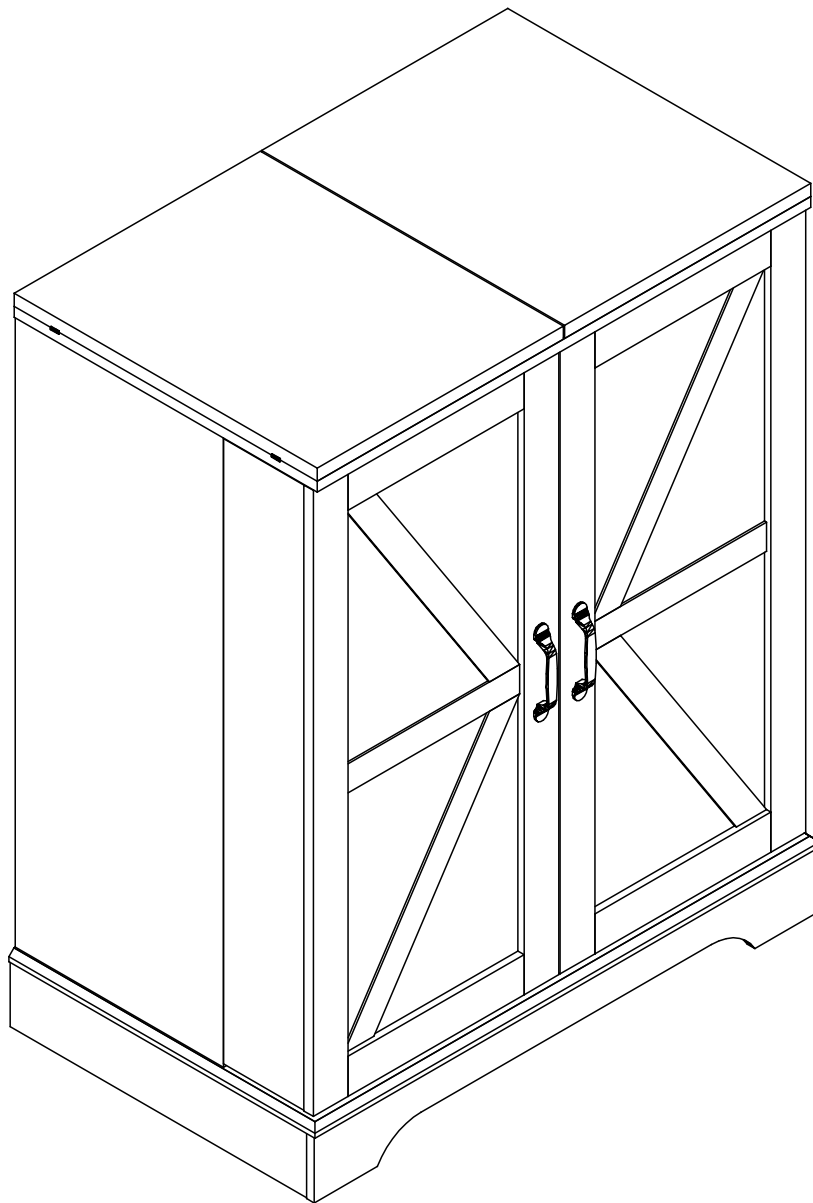

Dimensions

Width-30.7 inch
Depth-18.9 inch
Height-39.8 inch

Any question please feel free to contact us:
support@amer-life.com TEL:(901) 347-2181
We will provide further assistance within 24 hours

Important – Please read these instructions fully before starting assembly



Safety and Care Advice

Important – Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on the following pages.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.

- During assembly do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.



- To reduce the likelihood of damaging your product please ensure that your power drill is set on a low torque setting.

Care and maintenance

• Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.

• From time to time check that there are no loose screws on this unit.

• This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Handy Hints

• Assemble all parts and bolts loosely during assembly, only once the product is complete should you fully tighten the bolts.

• Regularly check and ensure that all bolts and fittings are tightened properly.

WARNING

In order to help prevent overturning – please follow these instructions

To help prevent product toppling over please follow the below steps:-

Use the anti tip strap or wall fixing method provided (if applicable)

Do not allow children to climb or hang on the furniture

Do not open more than one drawer at a time

Do not place heavy items in the top drawers































Do not place heavy items on top of the furniture, unless the furniture has been designed for this purpose

please note that only the anti tip strap is provided.

You will need to provide wall plugs and screws applicable for your wall type

Components - Panels


















Please check you have all the panels listed below

<p>1</p>  <p>(798*90*12mm)*1</p>	<p>2</p>  <p>(471*90*12mm)*1</p>	<p>3</p>  <p>(471*90*12mm)*1</p>	<p>4</p>  <p>(772*90*12mm)*1</p>	<p>5</p>  <p>(800*485*15mm)*1</p>
<p>6</p>  <p>(865*330*15mm)*1</p>	<p>7</p>  <p>(865*330*15mm)*1</p>	<p>8</p>  <p>(865*330*15mm)*1</p>	<p>9</p>  <p>(367.5*312*12mm)*1</p>	<p>10</p>  <p>(367.5*312*15mm)*1</p>
<p>11</p>  <p>(782*480*15mm)*1</p>	<p>12</p>  <p>(390*480*18mm)*2</p>	<p>13</p>  <p>(874*376*3mm)*2</p>	<p>14</p>  <p>(367*312*12mm)*2</p>	<p>15</p>  <p>(425*312*12mm)*2</p>
<p>16</p>  <p>(317*110*12mm)*1</p>	<p>17</p>  <p>(250*110*12mm)*1</p>	<p>18</p>  <p>(250*110*12mm)*1</p>	<p>19</p>  <p>(328*249*3mm)*1</p>	<p>20</p>  <p>(361*150*15mm)*1</p>
<p>21</p>  <p>(856*128*15mm)*1</p>	<p>22</p>  <p>(856*128*15mm)*1</p>	<p>23</p>  <p>(856*128*15mm)*1</p>	<p>24</p>  <p>(856*128*15mm)*1</p>	<p>25</p>  <p>(358*128*12mm)*1</p>
<p>26</p>  <p>(358*128*12mm)*1</p>	<p>27</p>  <p>(358*128*12mm)*2</p>	<p>28</p>  <p>(358*126*15mm)*4</p>	<p>29</p>  <p>(358*50*12mm)*6</p>	<p>30</p>  <p>(857*389*15mm)*2</p>


Components – Fittings

Please check you have all the panels listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

<p>A</p>  <p>Cam Bolt *76</p>	<p>B</p>  <p>Cam Lock *76</p>	<p>C</p>  <p>8*30mm Wooden Dowel*32</p>	<p>D</p>  <p>6*30mm Wooden Dowel*56</p>
<p>E</p>  <p>4*35mm Screw *4</p>	<p>F</p>  <p>Corner Hinge*6</p>	<p>G</p>  <p>Flip Hinge*4</p>	<p>H</p>  <p>Rail*1</p>
<p>I</p>  <p>3.5*12 Screw*10</p>	<p>J</p>  <p>Wine Rack*6</p>	<p>K</p>  <p>3.5*13 Screw*18</p>	<p>L</p>  <p>Handle*2</p>
<p>M</p>  <p>Back Panel Stiffener*12</p>	<p>N</p>  <p>Laminate clip*16</p>	<p>O</p>  <p>Wall Fixing Pack*2</p>	<p>P</p>  <p>Sticker*48</p>
<p>Q</p>  <p>Door Stopper*2</p>			

Tools required

 Phillips screwdriver
(medium & large)

Ruler - Use this ruler to help correctly identify the screws

0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170




The screws length is measured from the head to the point (30mm screw shown).

Using Camlocks


Step 1

Connect the male camlock as directed in the assembly instructions using a screwdriver.




Step 2

Push the male camlock into the entry hole.






Step 3

Insert the female camlock as shown in the instruction.
Note: ensure that the arrow on the top of the camlock points towards the entry hole for the male camlock.






Step 4

Turn the female camlock clockwise with a screwdriver. You should feel a click when the camlock is locked in place. The joint is now secure.

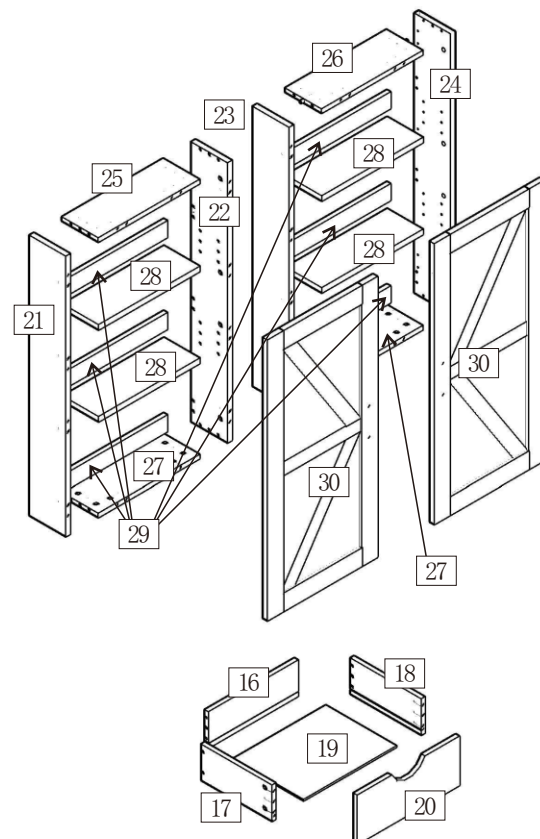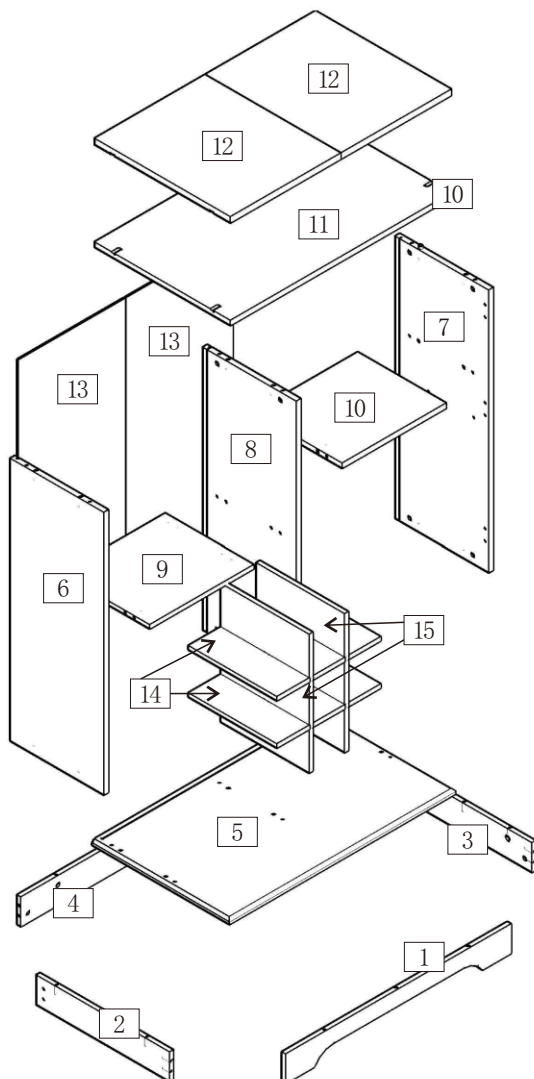

Assembly instructions




Step 1

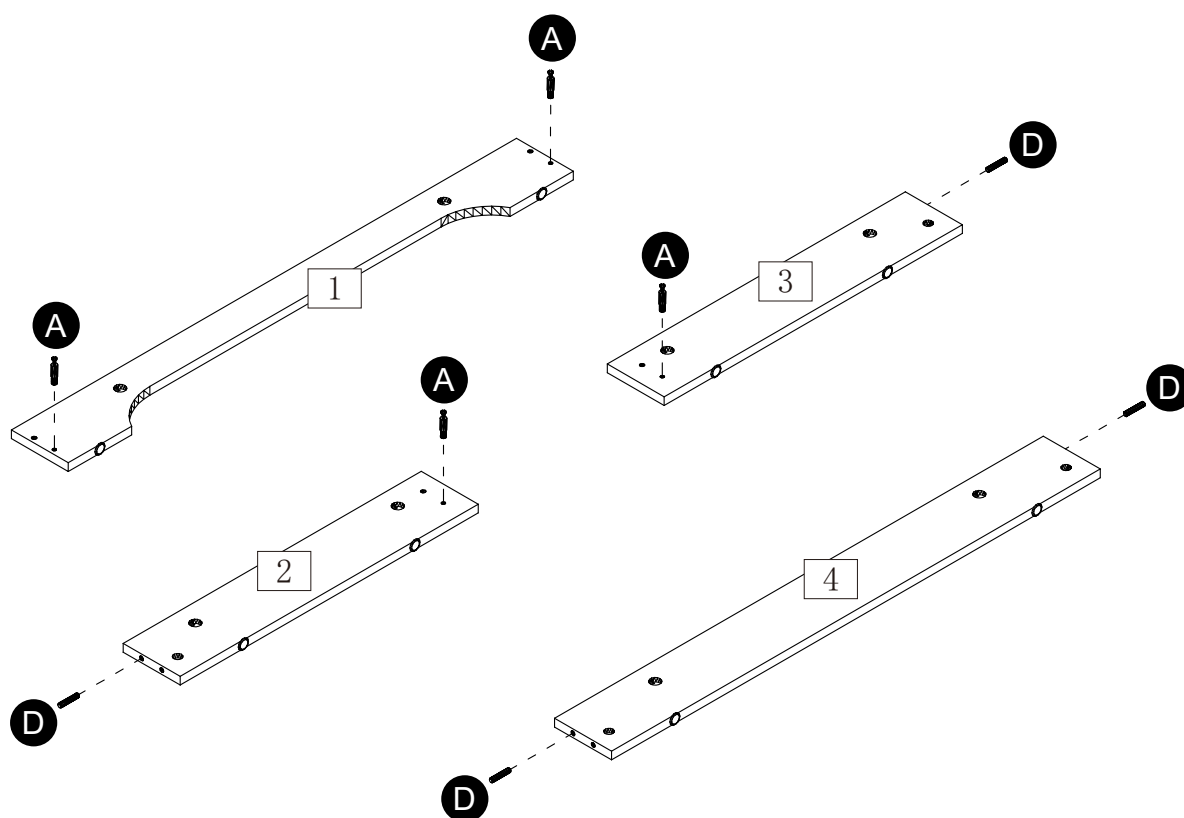

Insert Cam Bolt (A) on the foot board (1)(2)(3)
Insert Wooden Dowel(D) on the foot board (2)(3)(4)



Assembly instructions

Step 2

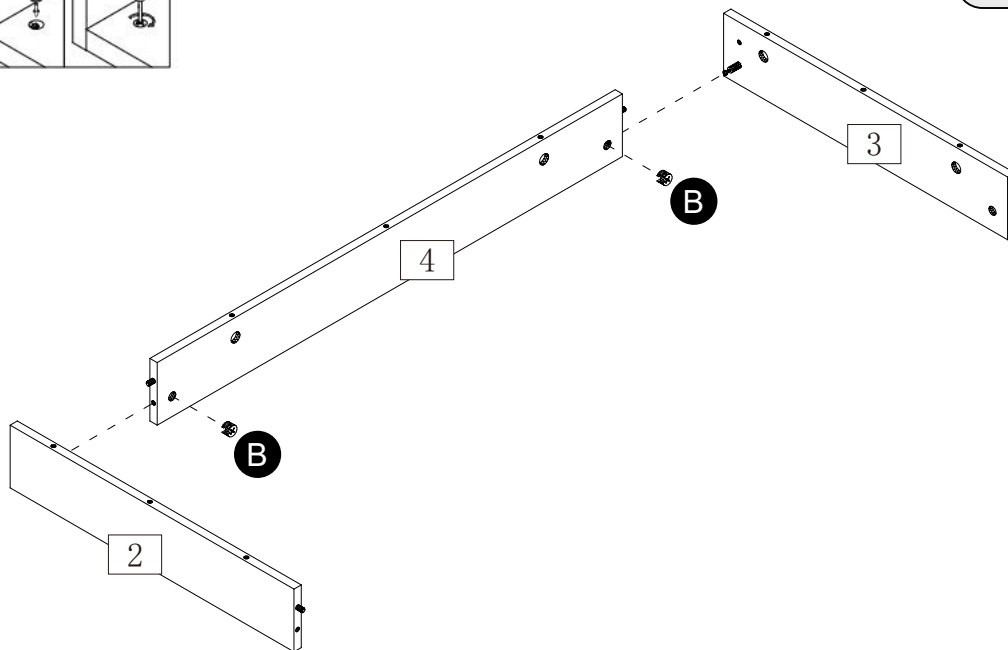

Attach foot board (2) (3) to foot board (4), then use Cam Lock (B) to lock it




Step 3

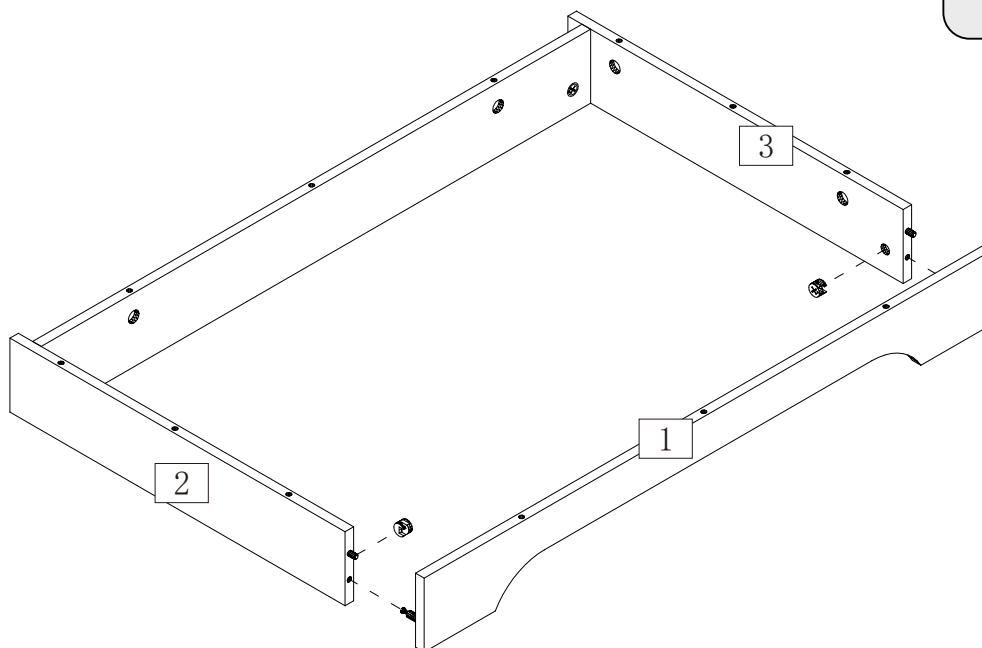

Use Cam Lock (B) to lock foot board(1)and foot board(2)(3)



Assembly instructions

Step 4

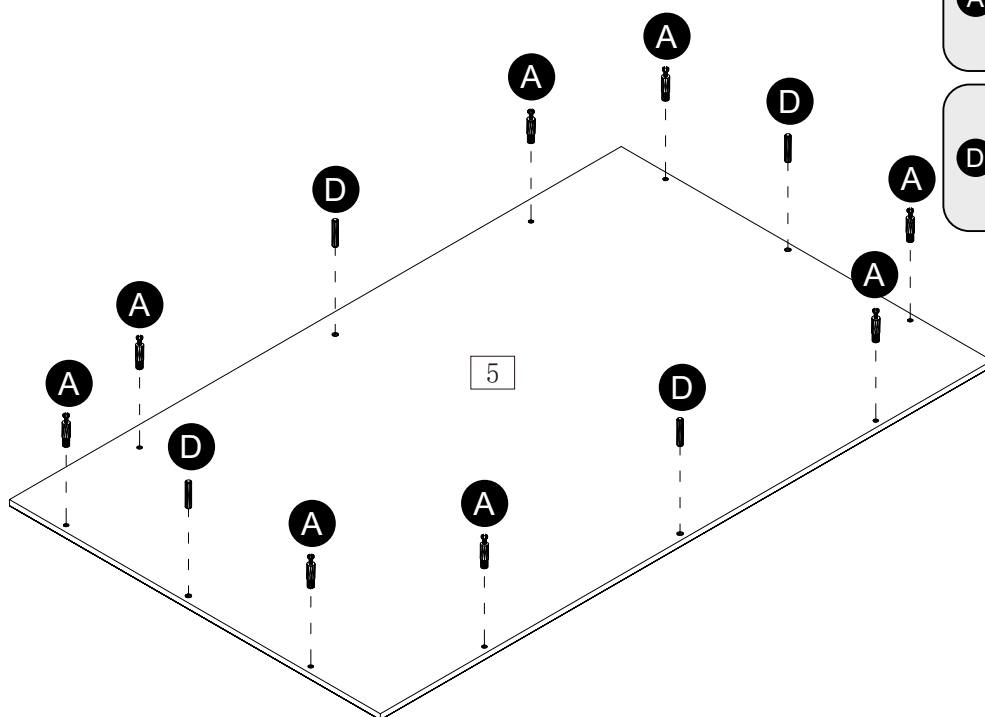

Install Cam Bolt (A) and Wooden Dowel (D) on the hole in back side of panel(5)







Step 5

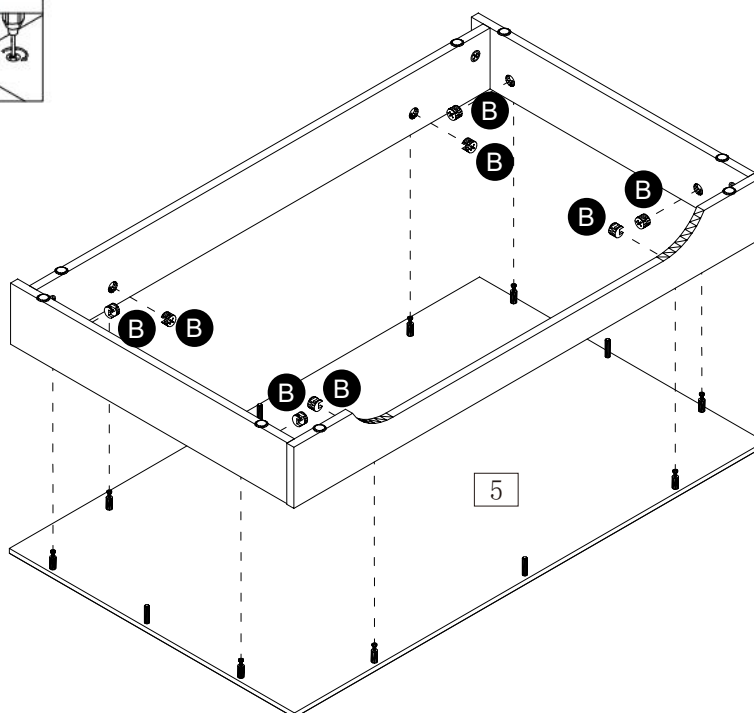

Use Cam Lock(B) to lock foot board(5) with the foot board base.

Assembly instructions






Step 6

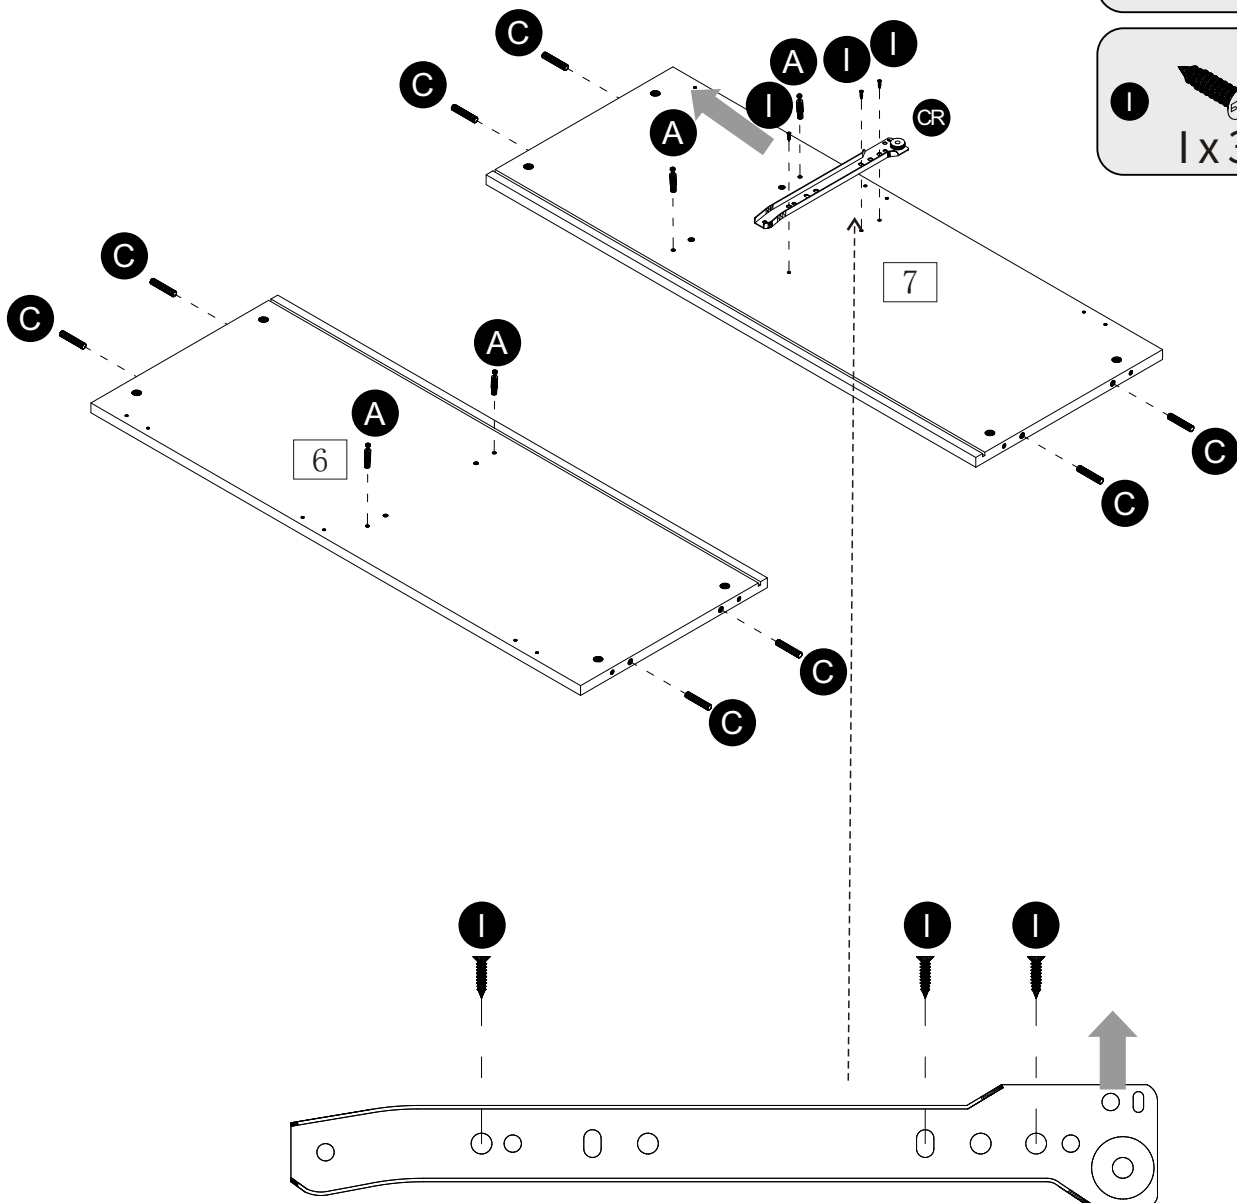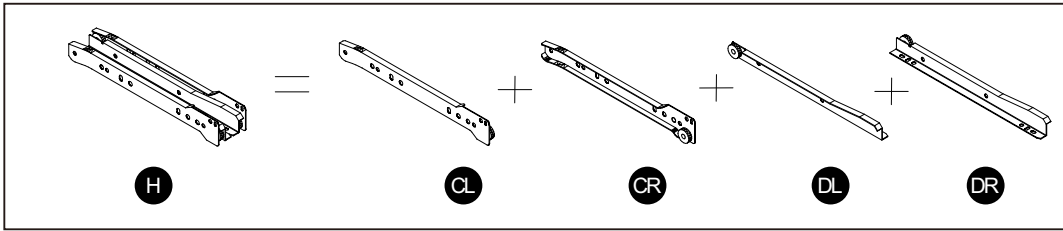

Install wooden Dowel (C) and Cam Bolt (A) into part (6.7)
Use Screw (I) to connect the rail (CR) and part (7)



Assembly instructions

Step 7

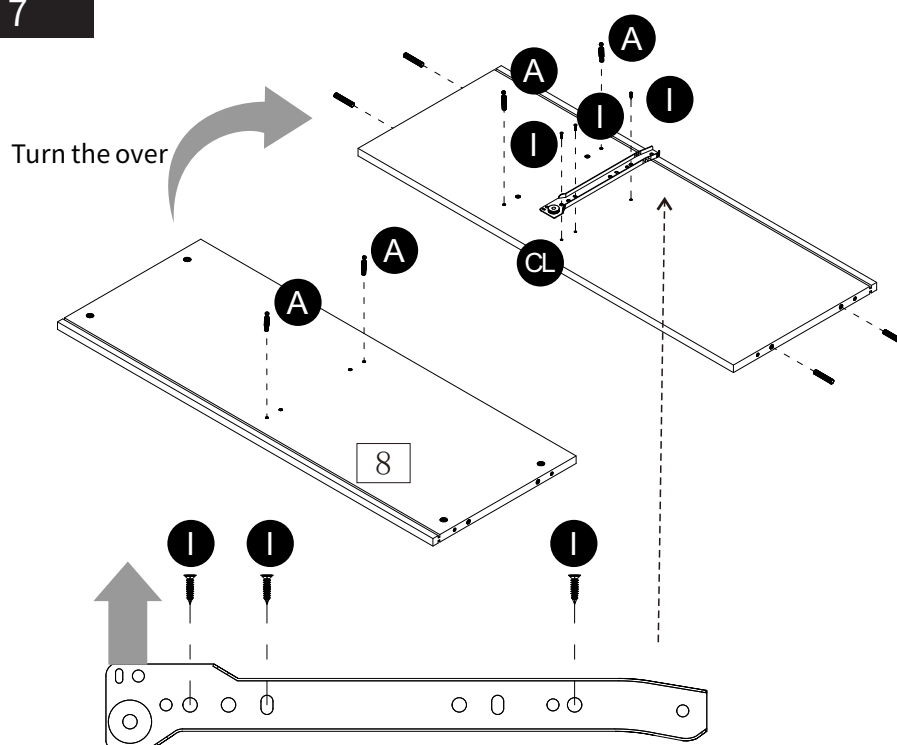

Install wooden Dowel (C) and Cam Bolt (A) into part (8)
Use Screw (I) to connect the rail (CL) and part (8)




Step 8

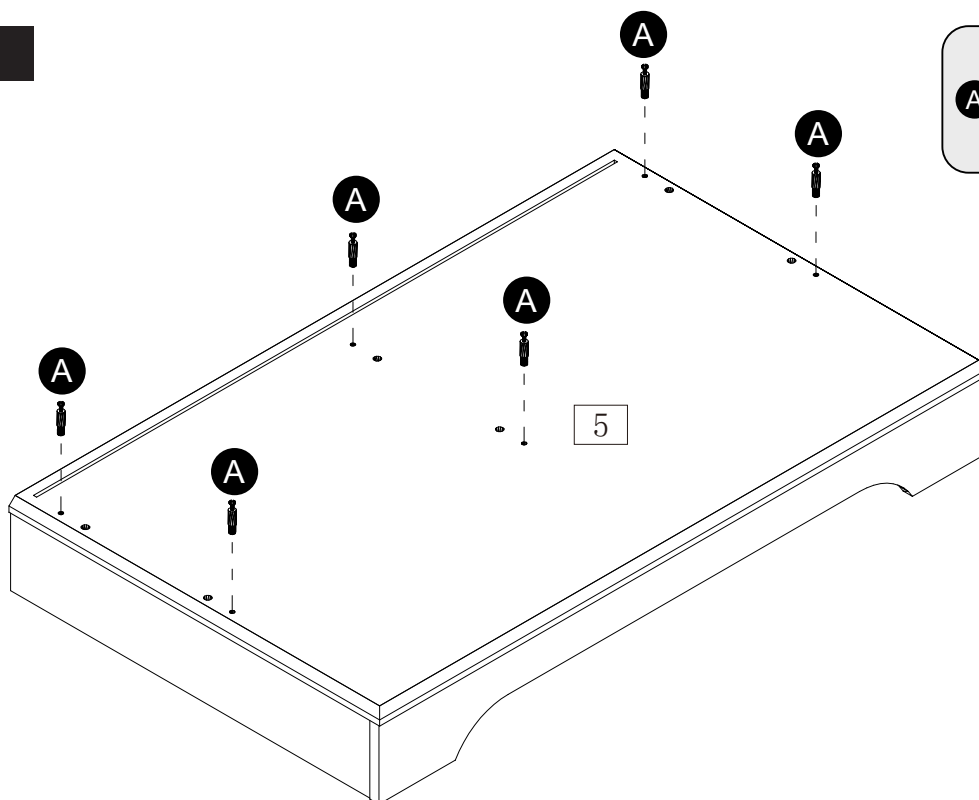

Insert the Cam Bolt (A) to the connected part (5)

Assembly instructions



Step 9

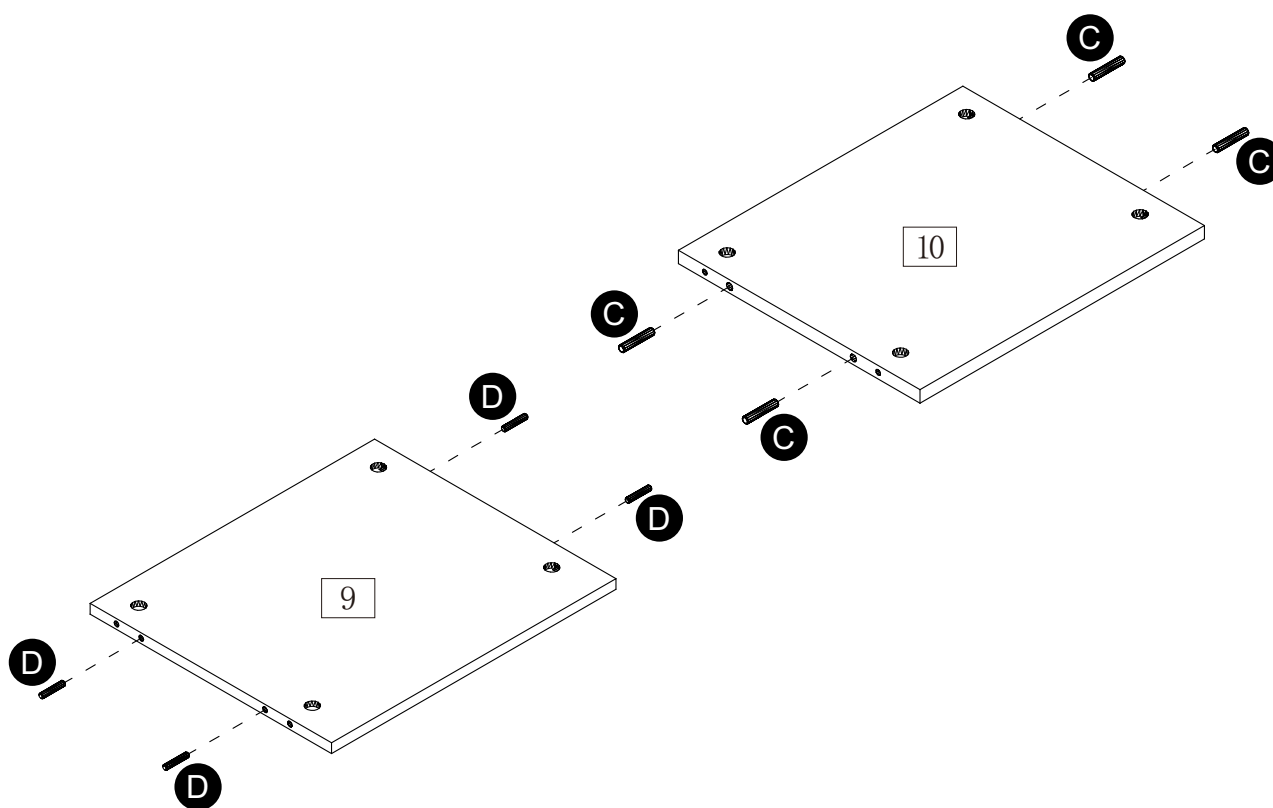

Insert Wooden Dowel (D) to part (9)
Insert Wooden Dowel (C) to part (10)


Assembly instructions

Step 10

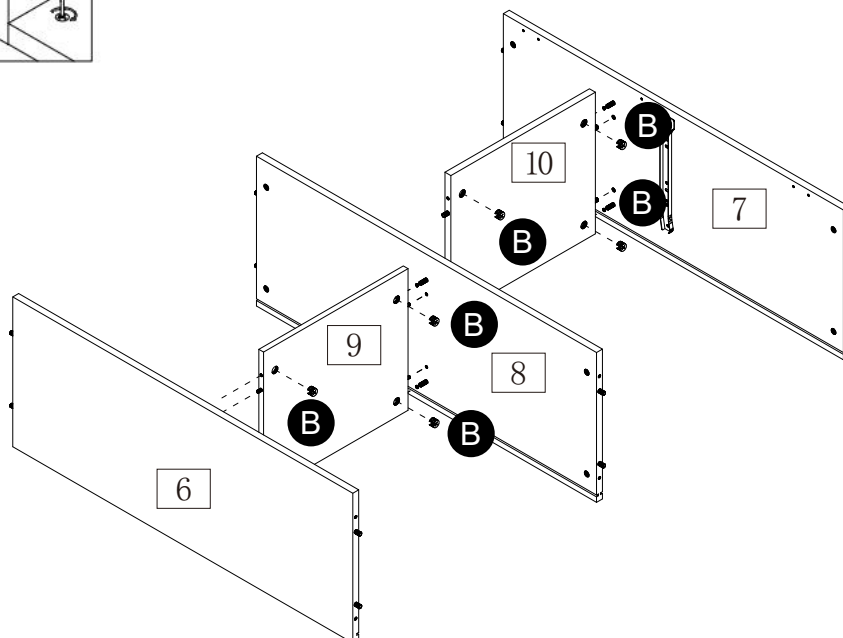

Use Cam Lock (B) to connect part (9.10) with part (6.7.8), then lock it


Step 11

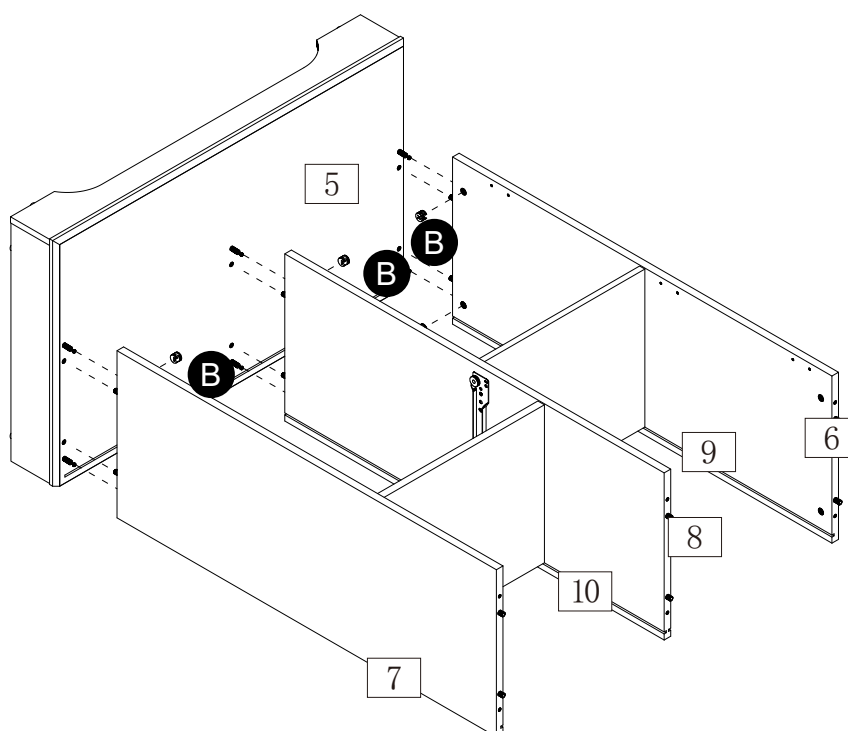

Connect the part(5)with part(6.7.8),then use Cam lock (B) to lock it.

Assembly instructions



Step 12

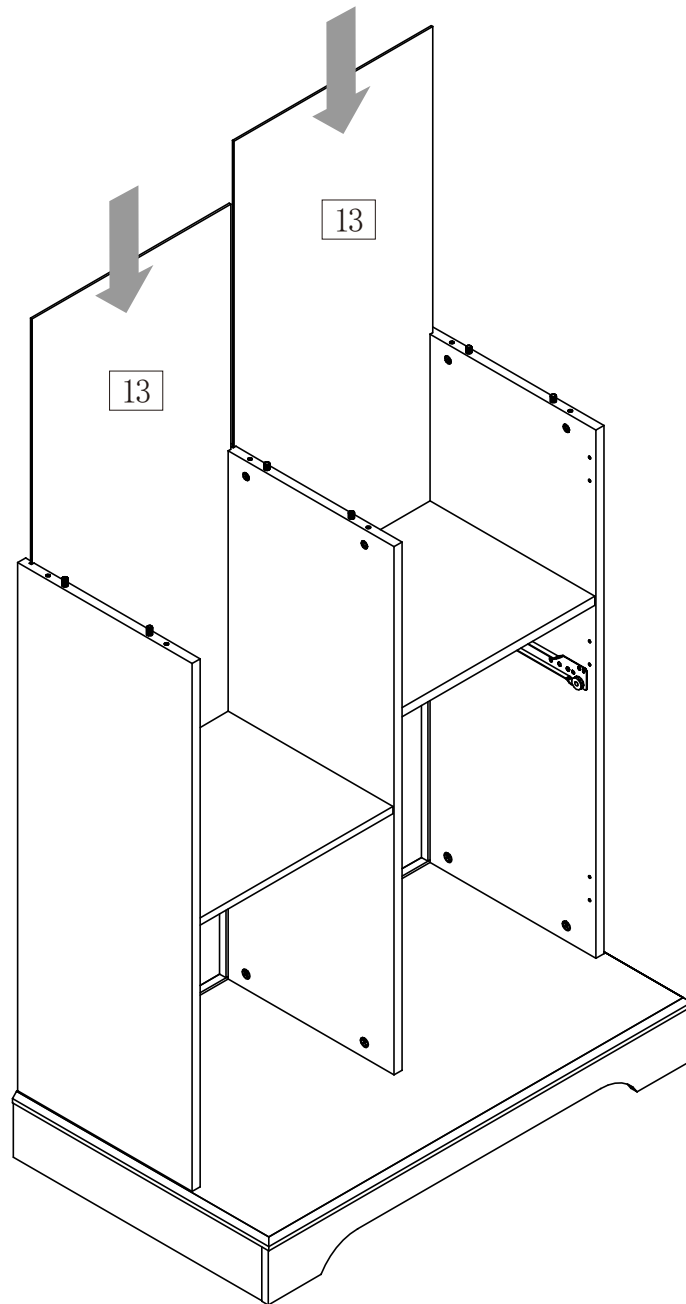

Slide panel (13) into grooves as per diagram.

Assembly instructions


Step 13

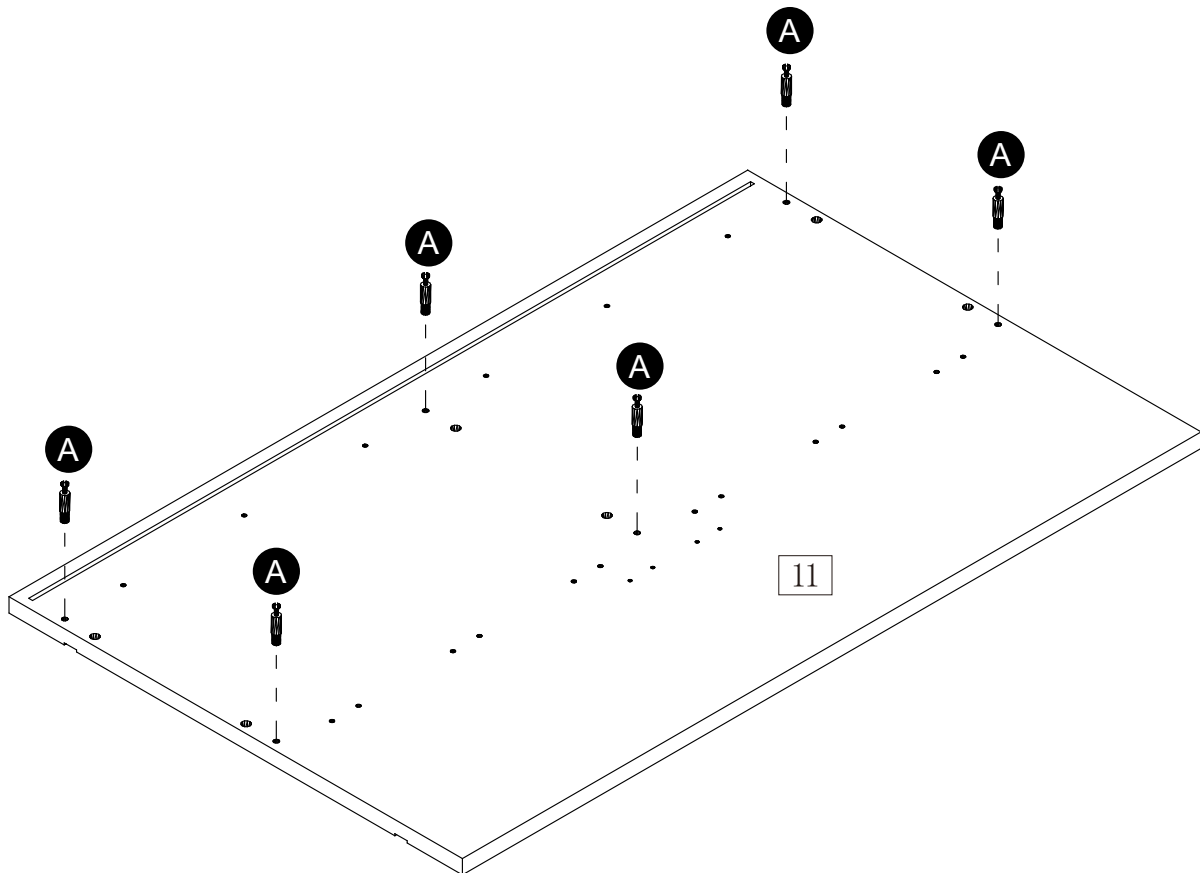

Attach Cam Bolt (A) to the top panel (11) with a screwdriver.

Assembly instructions



Step 14

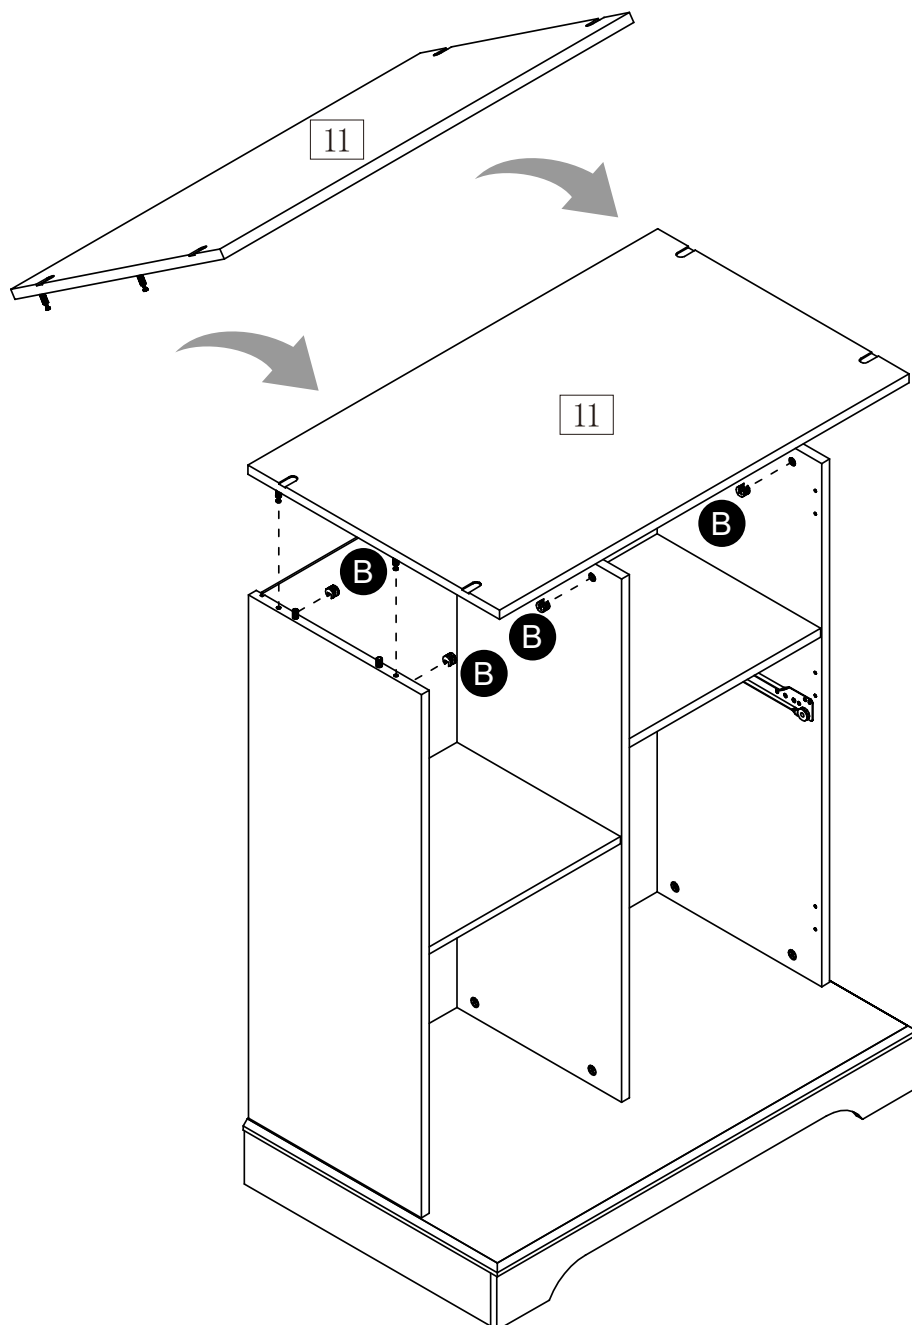

Use Cam Lock (B) to attach the panel(11) and panel(6.7.8) and lock it.

Assembly instructions



Step 15

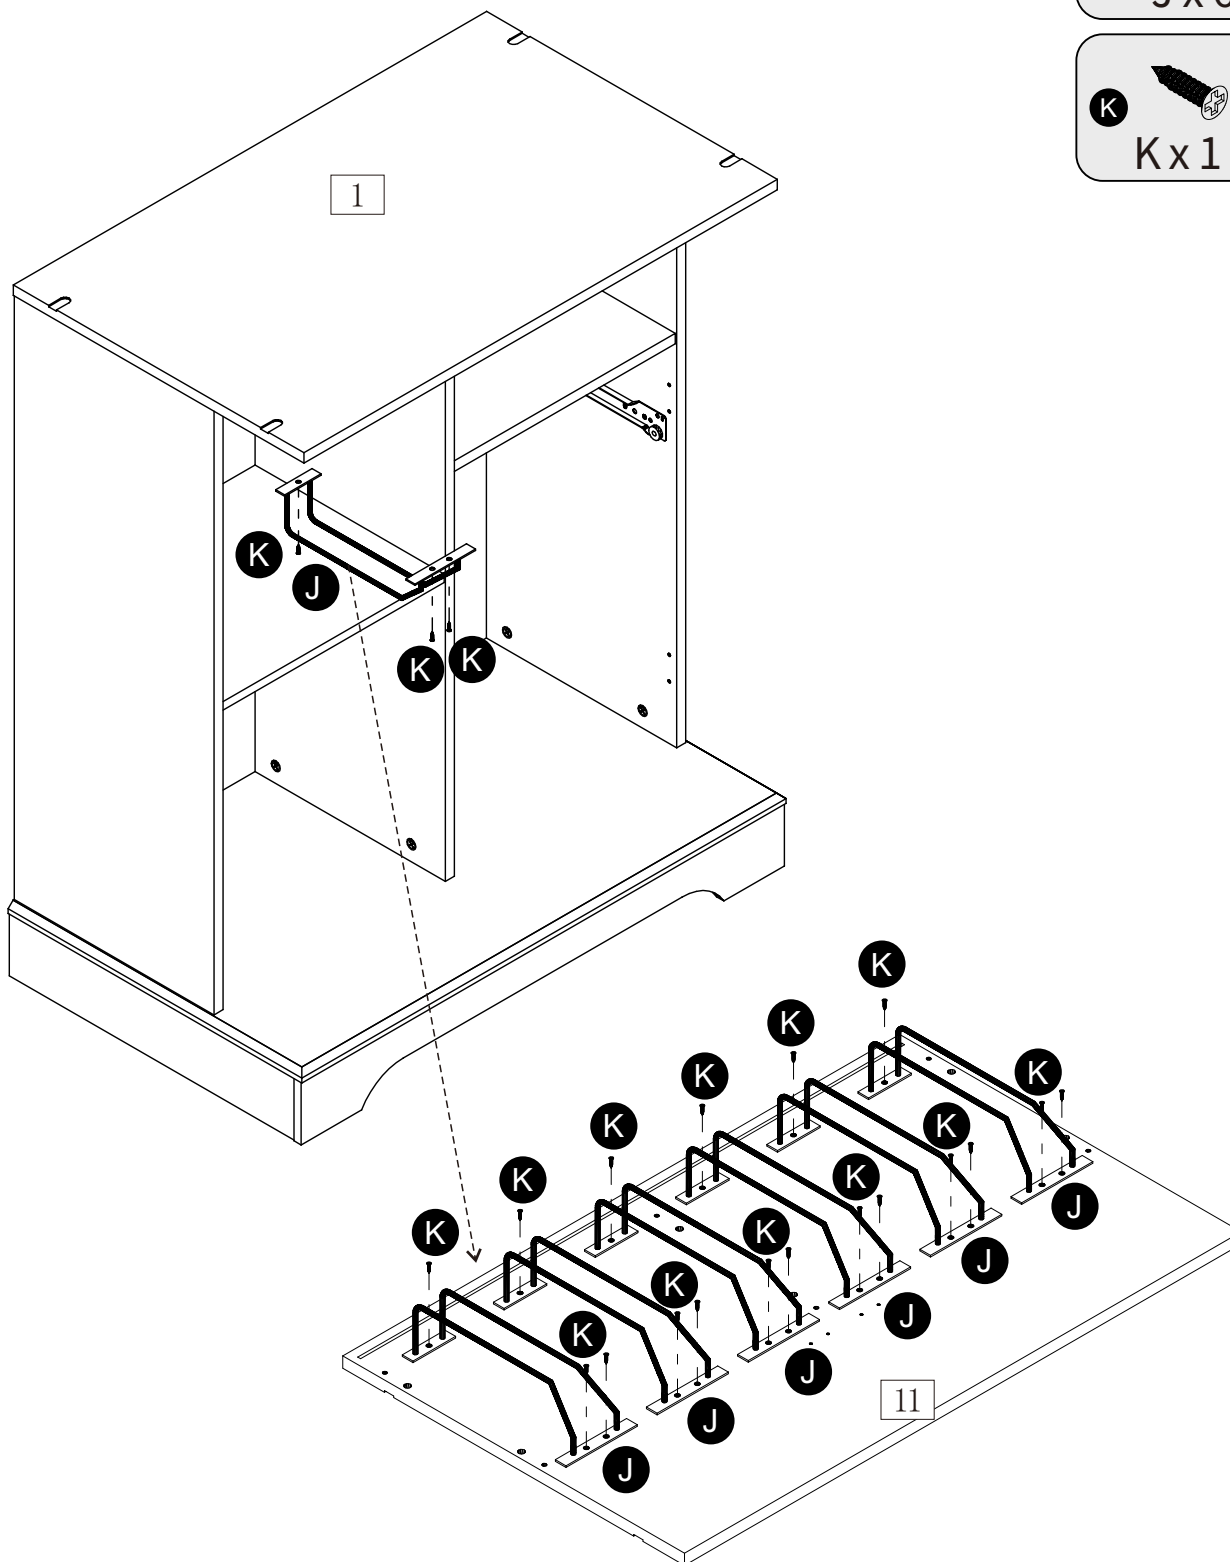

Use Screw(K) to install part(J) on the reverse side of the hole on part(11)




Assembly instructions

Step 16

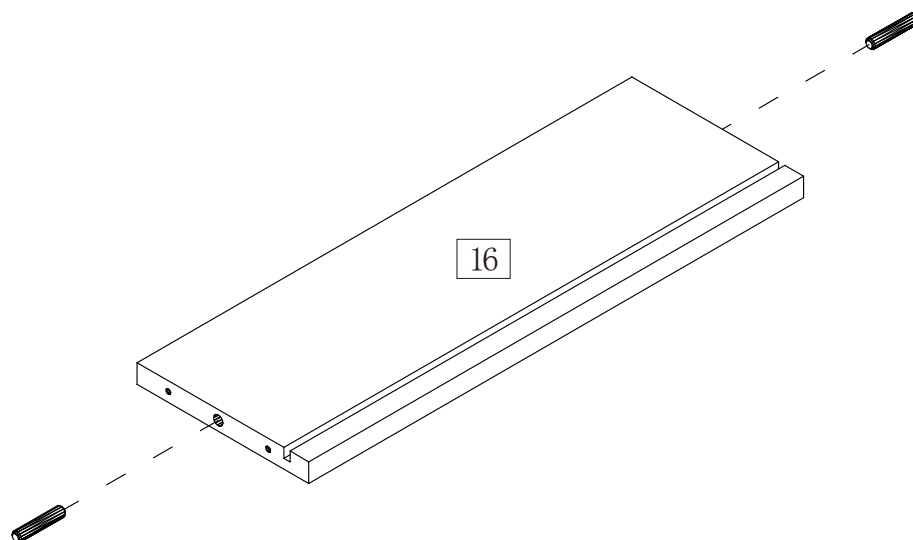

Insert Wooden Dowel (D) to part (16)


Step 17

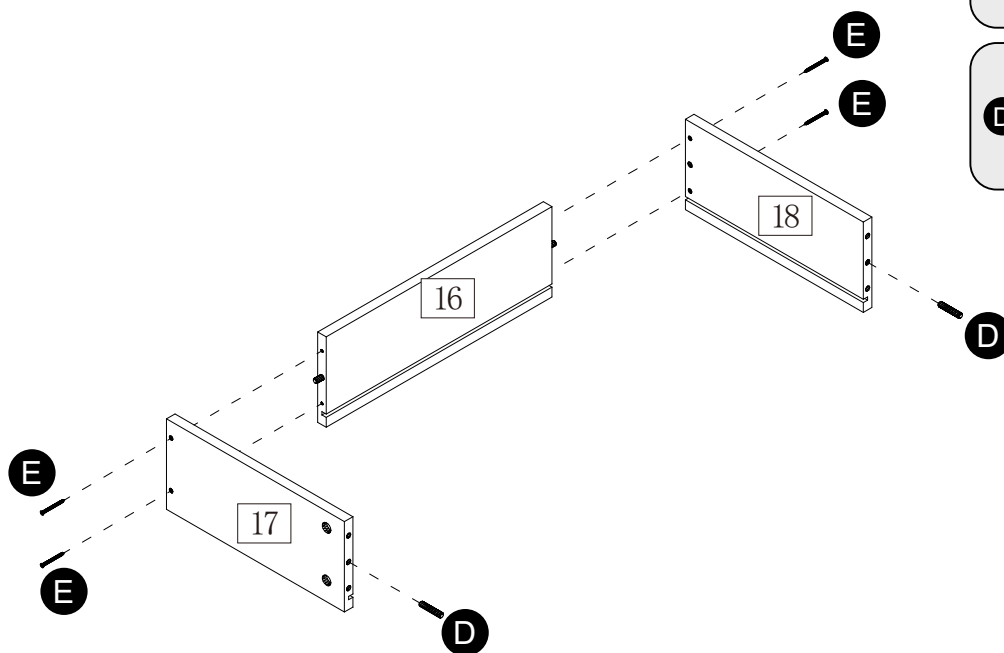

use screw (E) to lock panel (16.17.18) , then insert Wooden Dowel(D) to panel(17.18)and lock it


Assembly instructions

Step 18

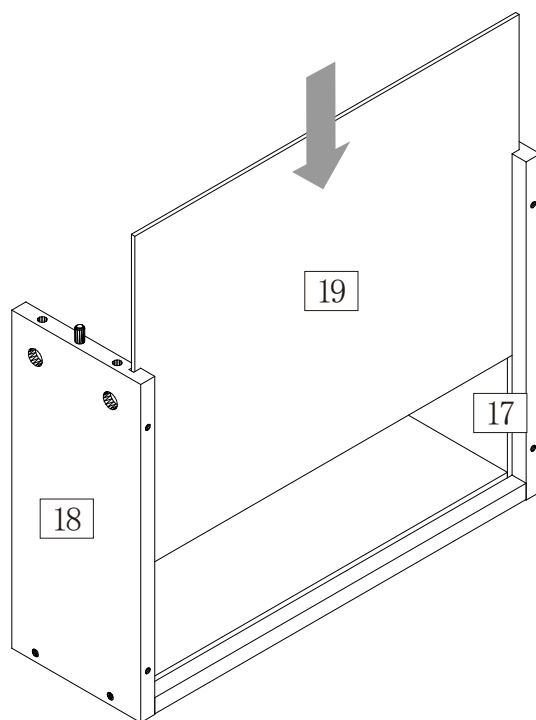

Slide panel (19) into grooves as per diagram.




Step 19

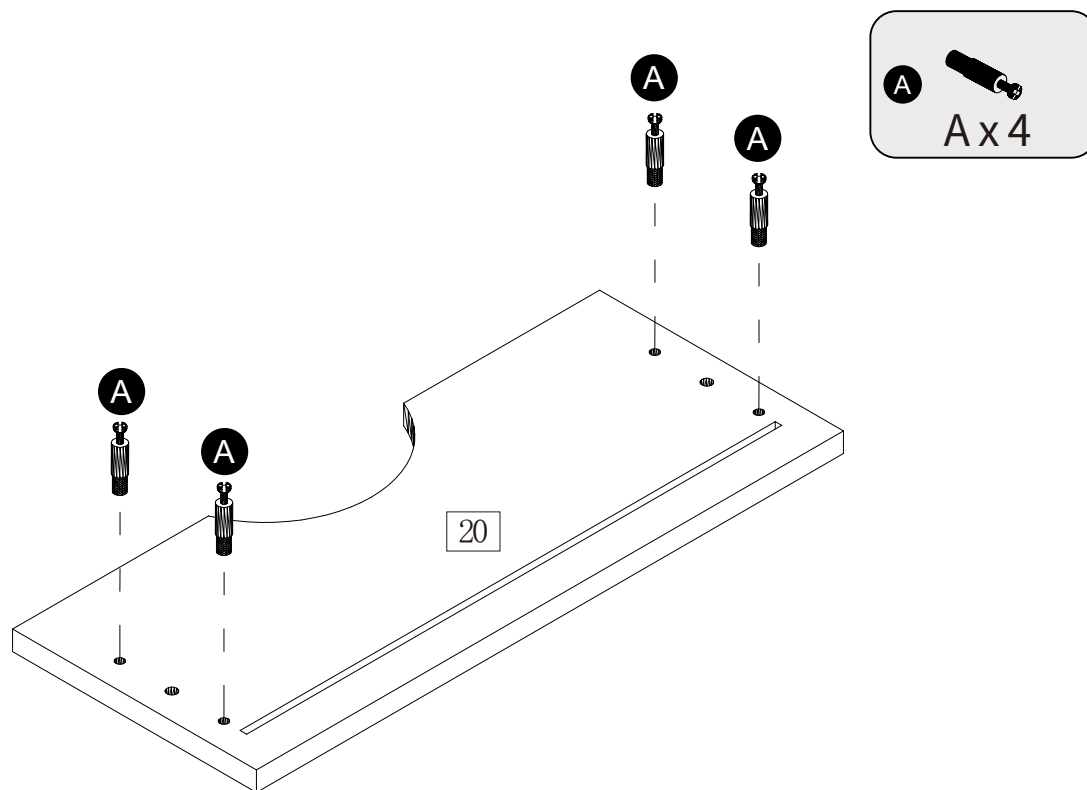

Attach Cam bolt (A) to panel (20) with a screwdriver.

Assembly instructions




Step 20

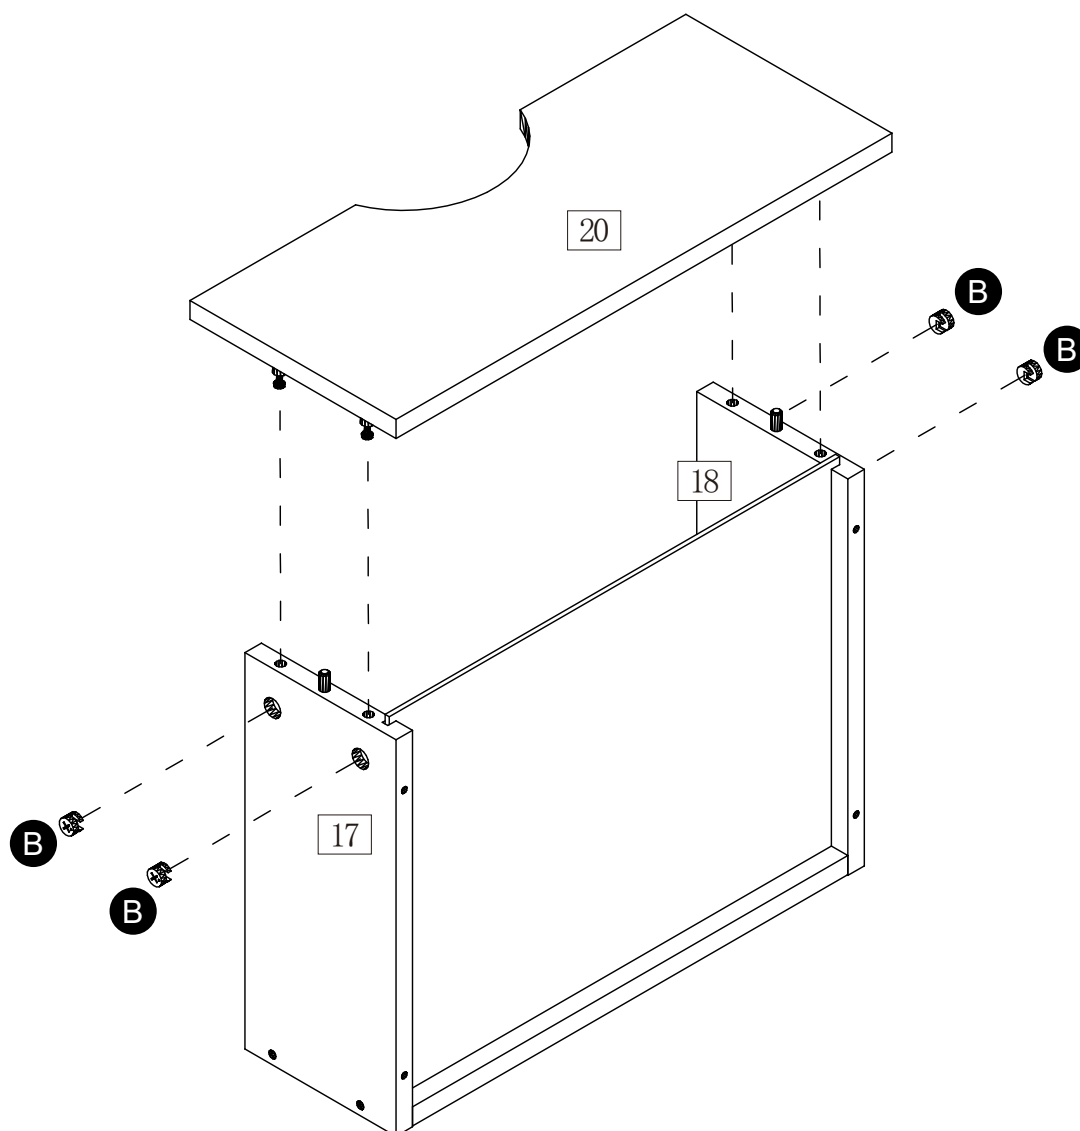

Use Cam Lock (B) to lock panel (20) with panel (17.18)

Assembly instructions




Step 21

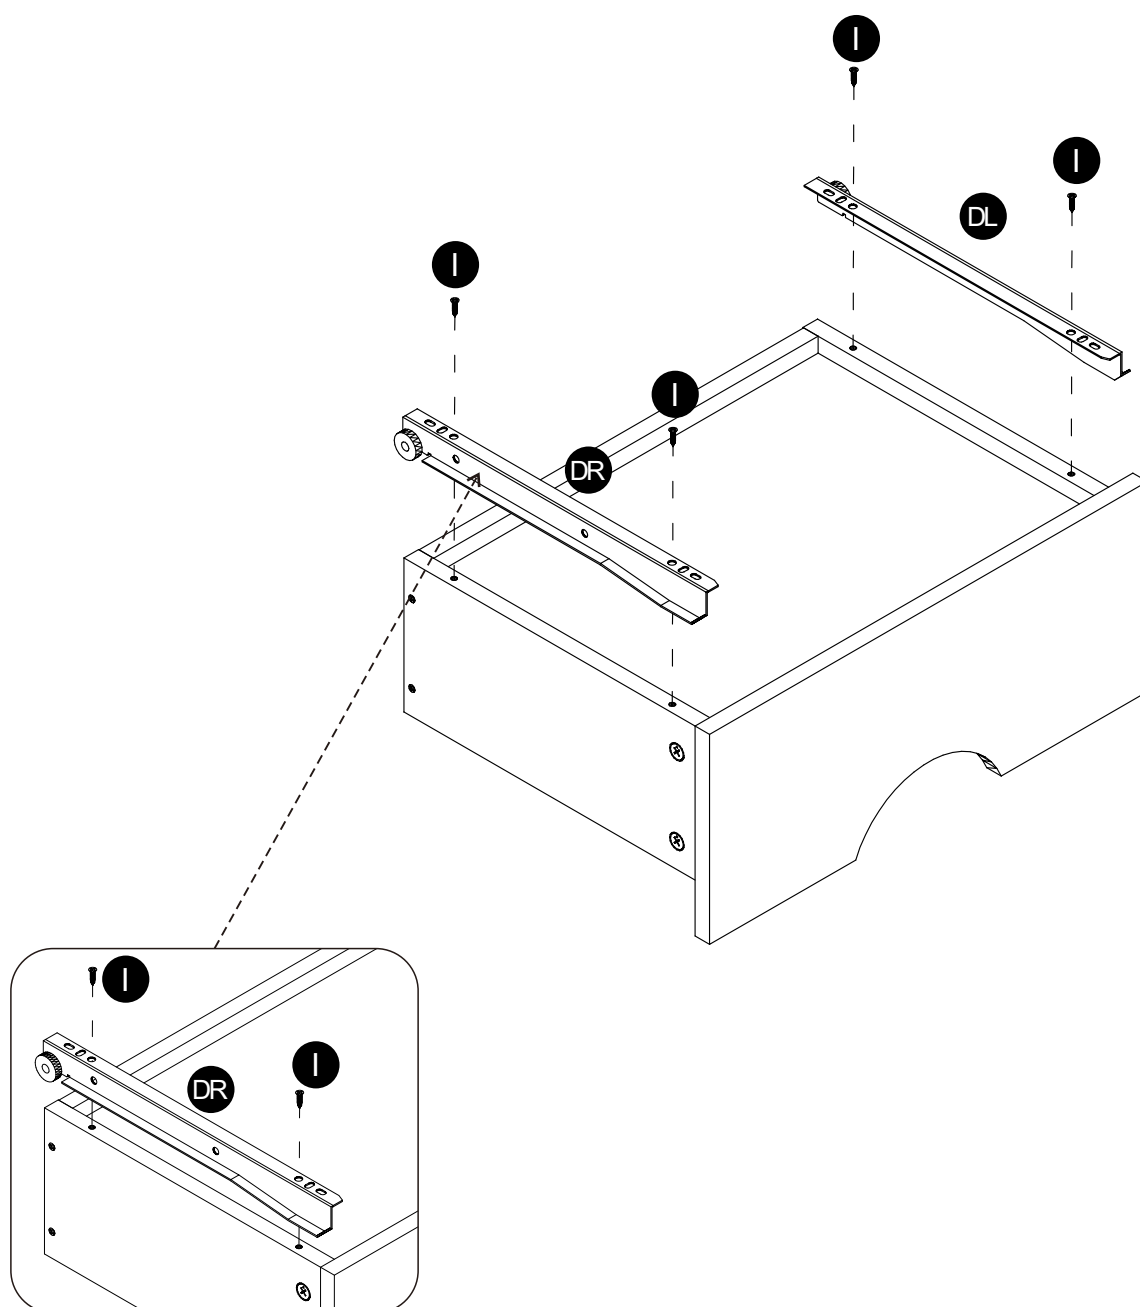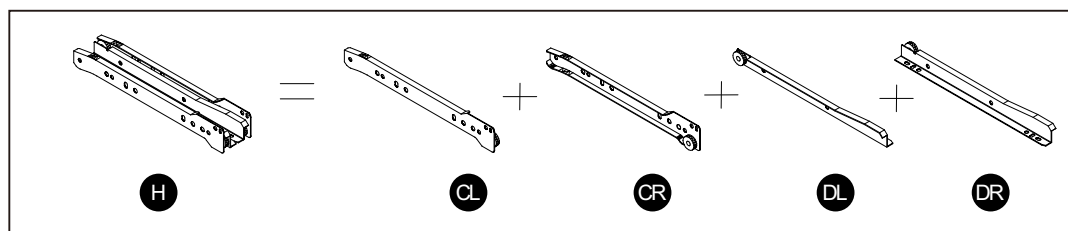

Use Screw (I) to install the part (DL.DR) of rail (H) on the drawer, differentiate left and right



Assembly instructions

Step 22

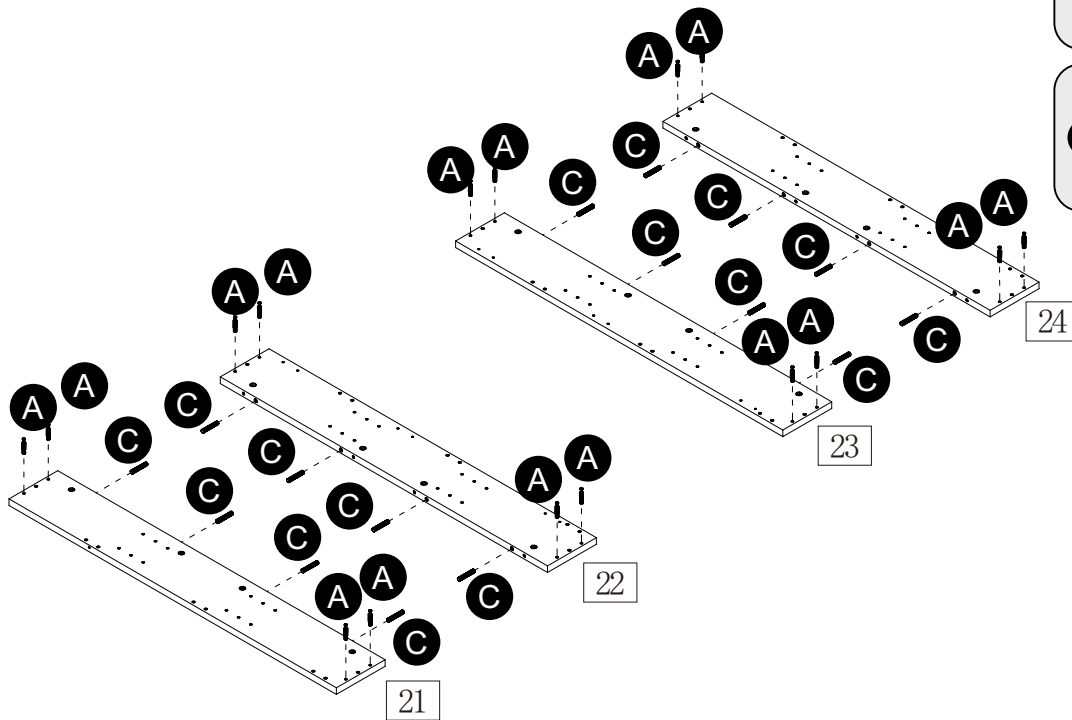

Attach Cam Bolt (A) and Wooden Dowel (C) to panel (21.22.23.24)



Step 23

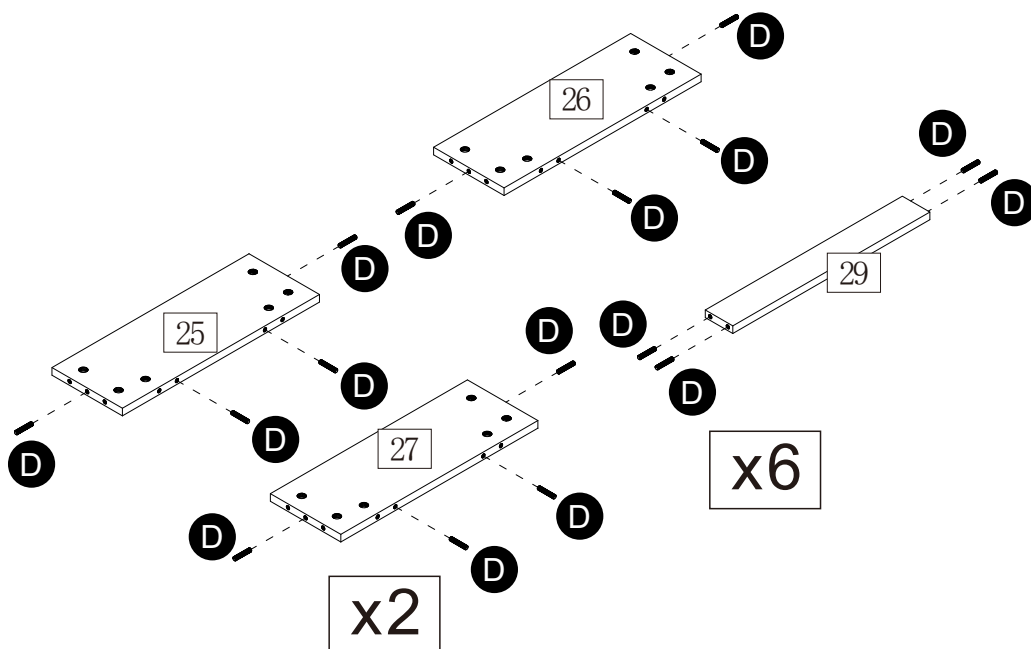

Insert wooden Dowel (D) to panel (25.26.27) and panel (29)

Assembly instructions




Step 24

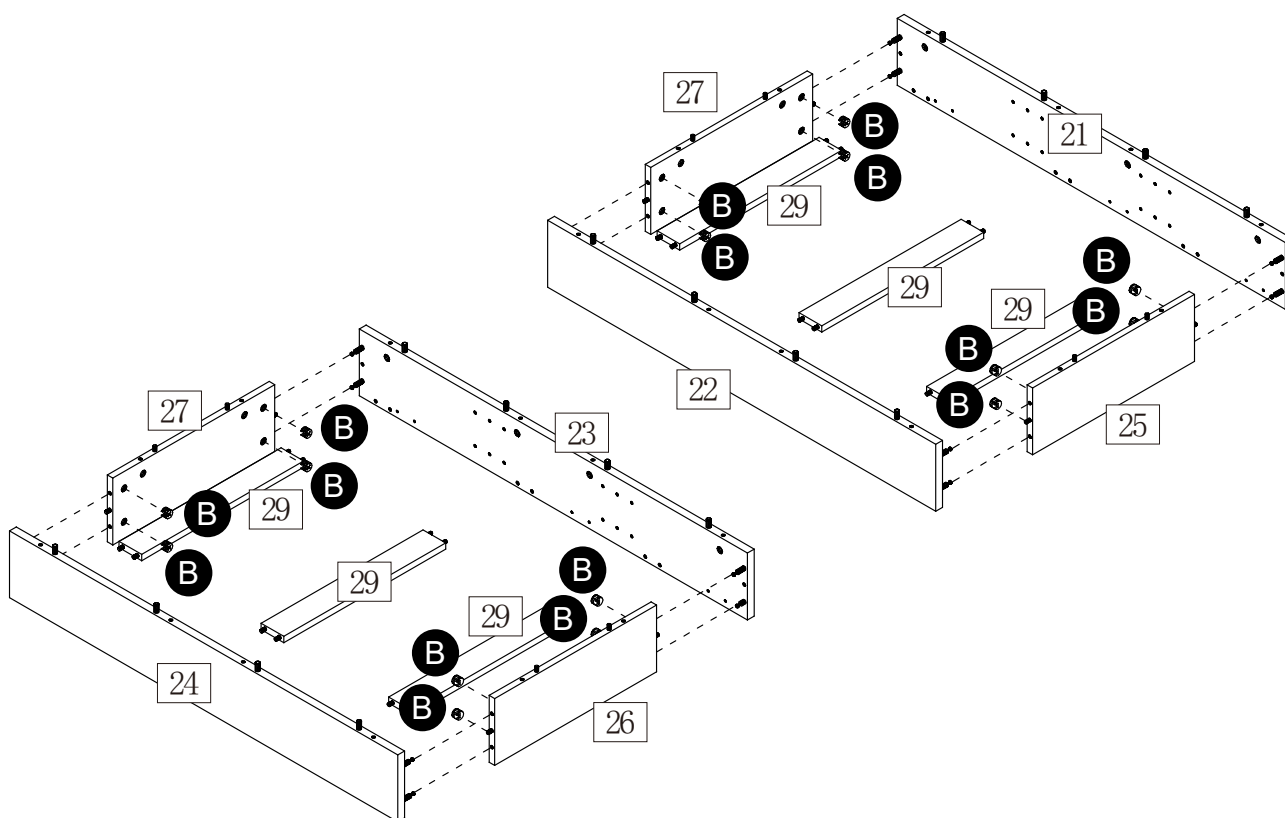

Attach panel (29) with panel (21.22.23.24) , then use Cam Lock (B) to lock panel (21.22.23.24) with panel (25.26.27)

Assembly instructions



Step 25

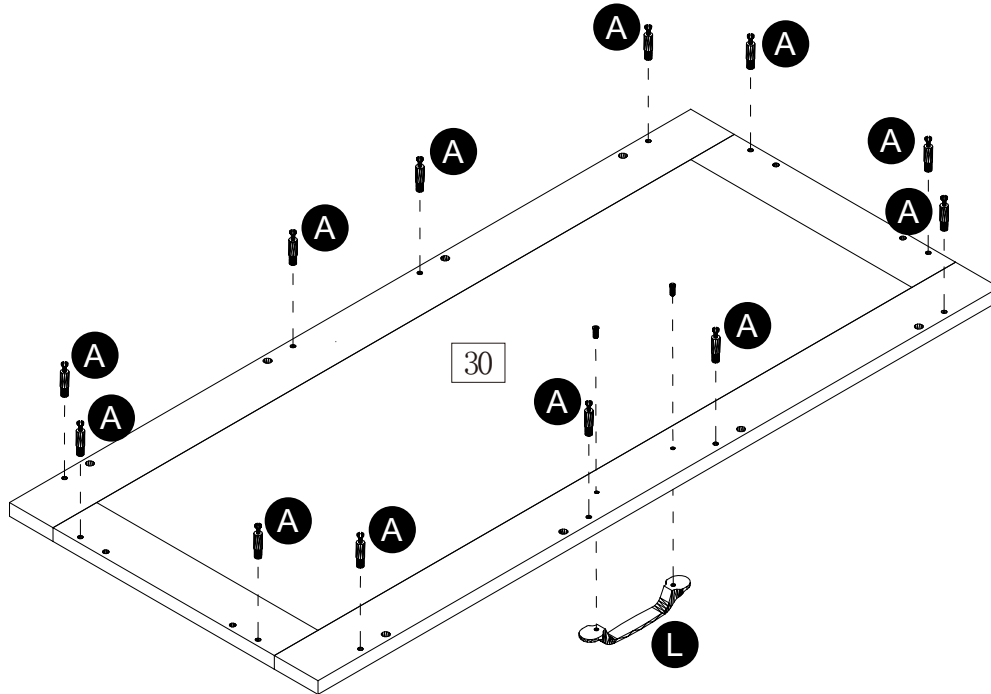

×2

Install Cam Bolt (A) and handle (L) to panel (30)

Step 26

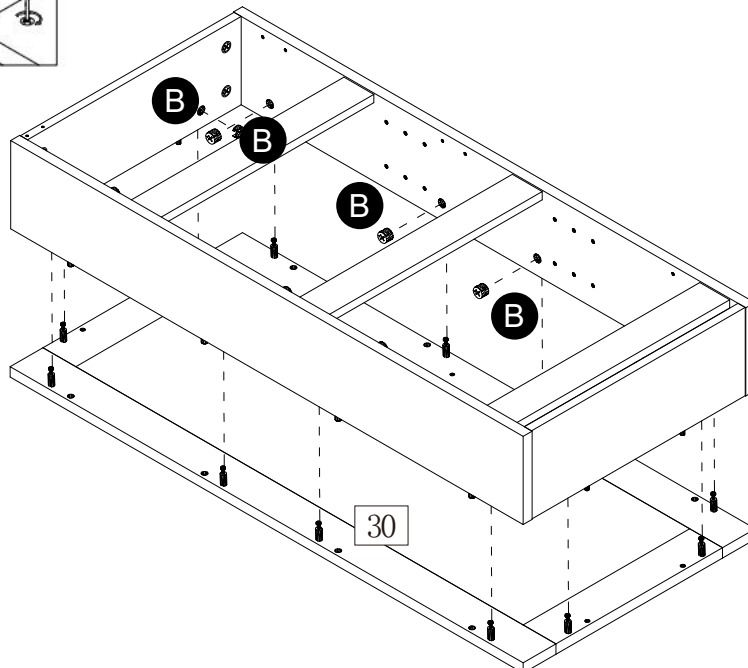


×2

Use Cam lock (B) to lock the connected drawer with panel (30)

Assembly instructions


Step 27

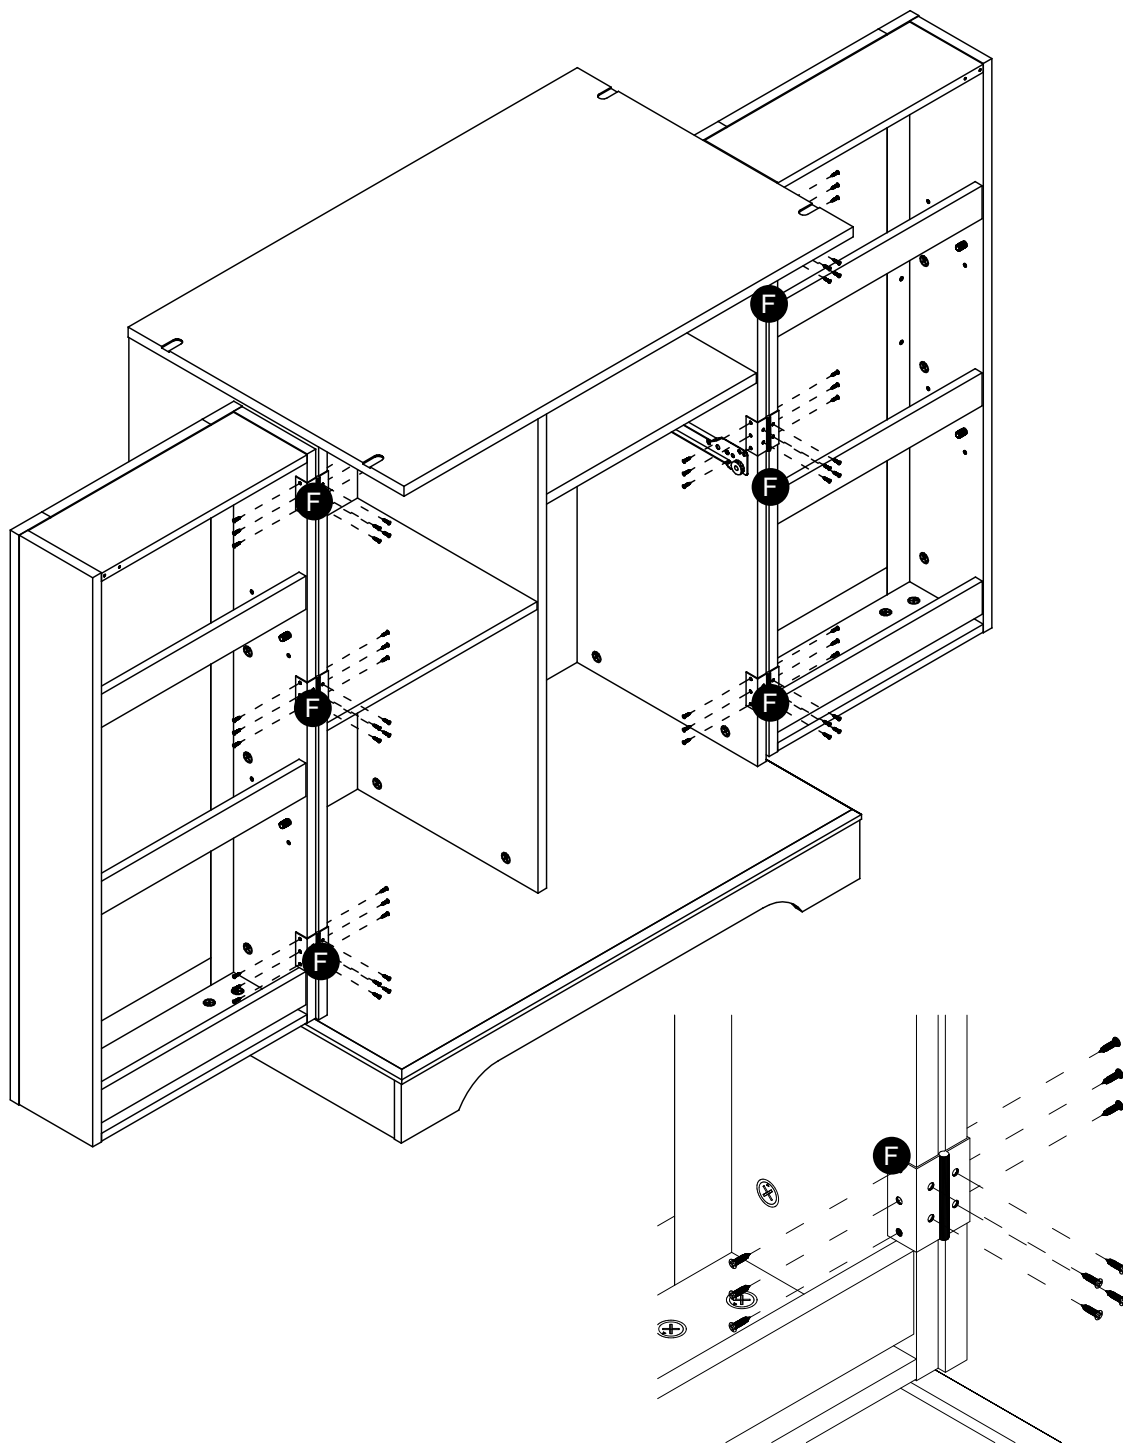

Use part(F) to lock the connected parts ,install screws according to the actual situation

Assembly instructions


Step 28

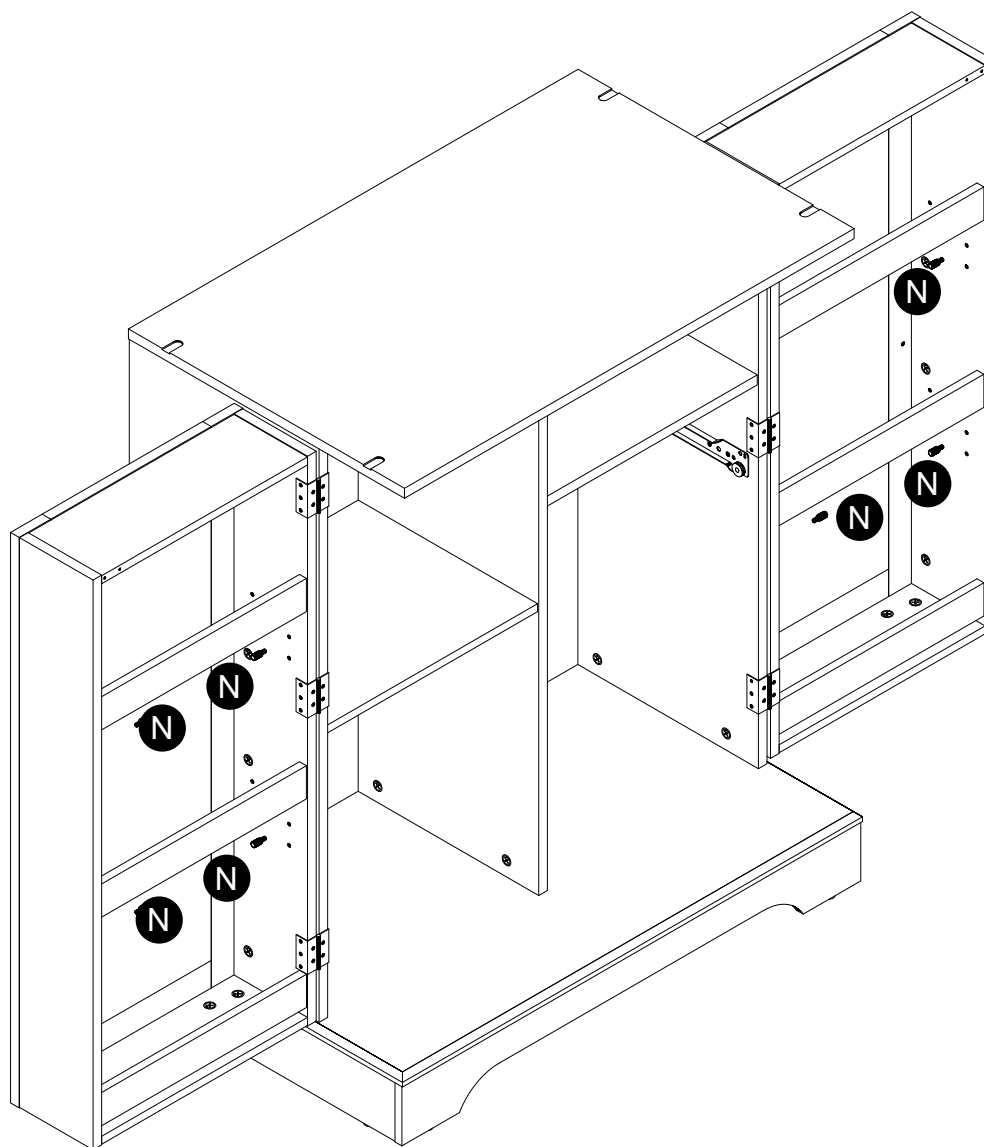

Select a row of holes to install the laminate clips (N) as needed

Assembly instructions




Step 29

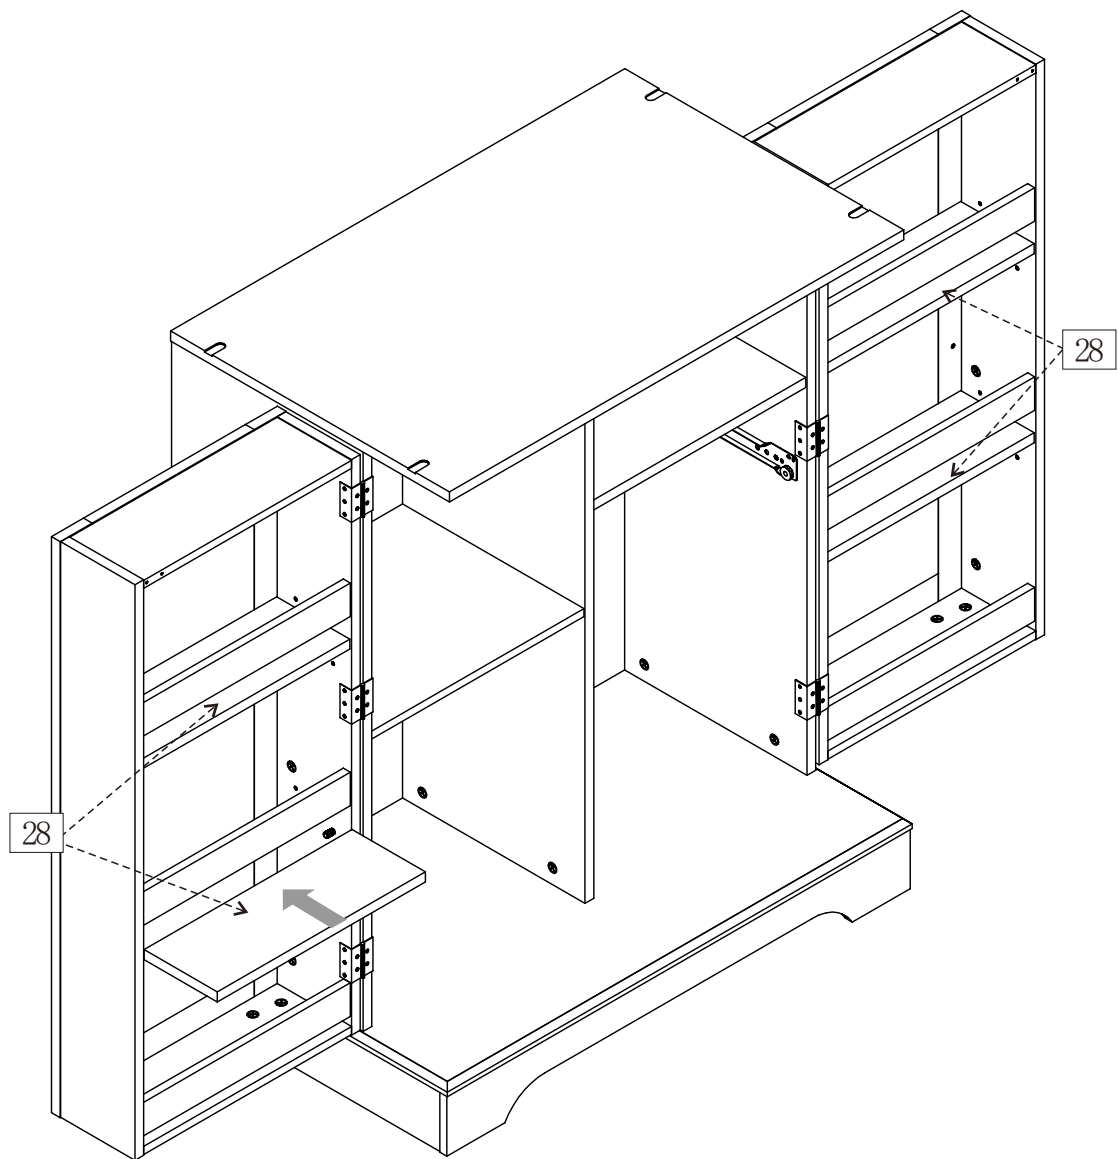

Put part (28) on the laminate clips, position can be adjusted as required

Assembly instructions



Step 30

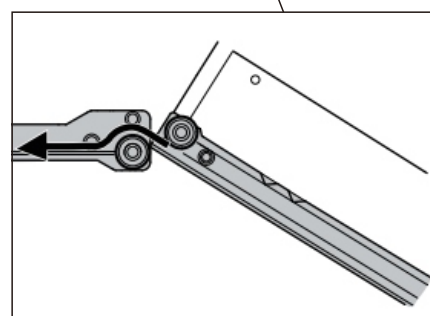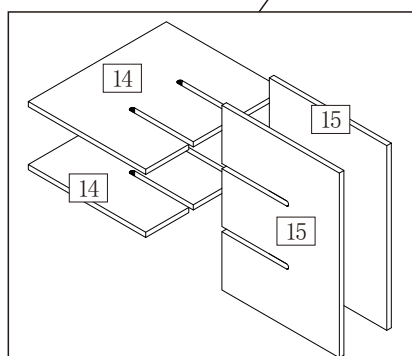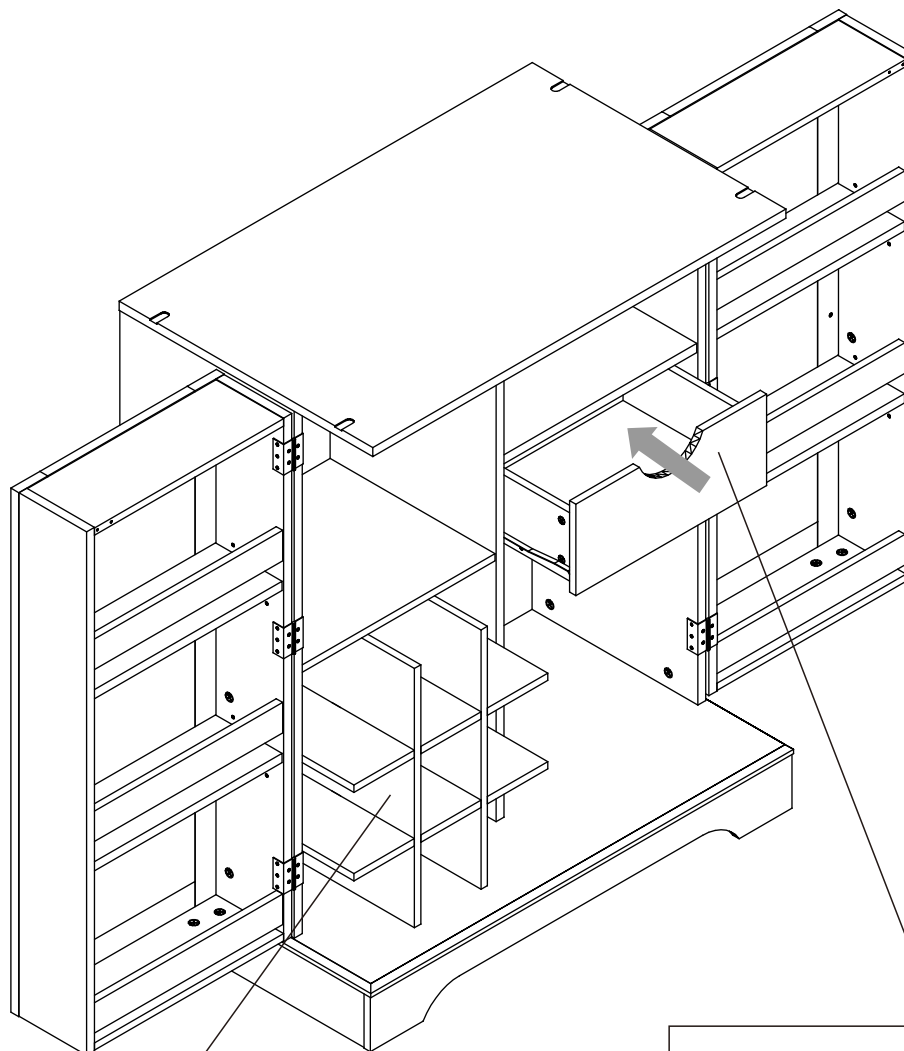

Put the assembled drawer into the cabinet rail, tilt the front of the drawer slightly and place the roller of the drawer rail behind the roller of the cabinet rail, then slide the drawer in. Connect 2 pieces of part (14) and 2 pieces of part (15), then put them in the bottom of left.

Assembly instructions


Step 31

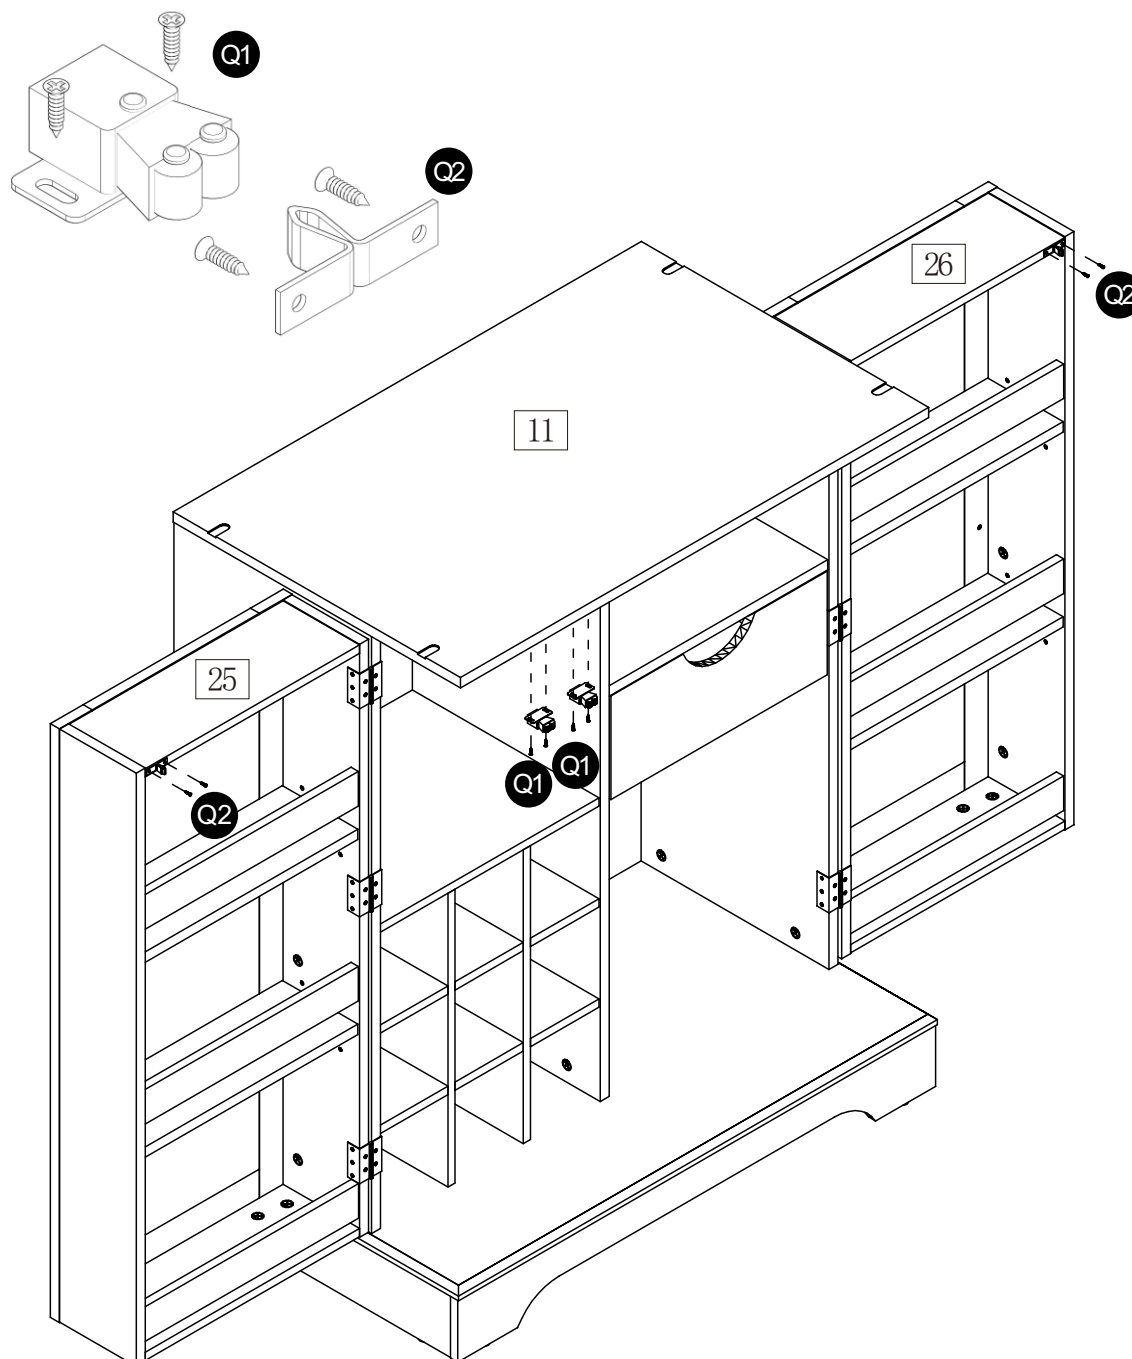

Split the door stopper into part(Q1)and part(Q2) ,install part(Q1)on reverse side of part(11).Install part(Q2) on the both side of the side panel.


Assembly instructions

Step 32

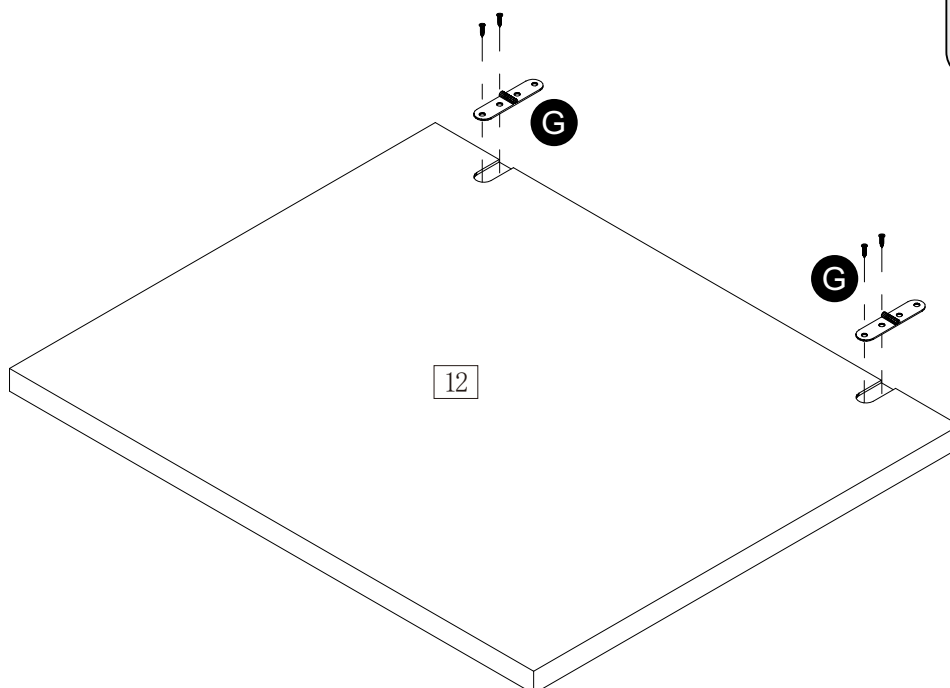

Install the one side of part(G) on the gap of part(12),the reversed side of part(G)is mounted on the part(12)



Step 33

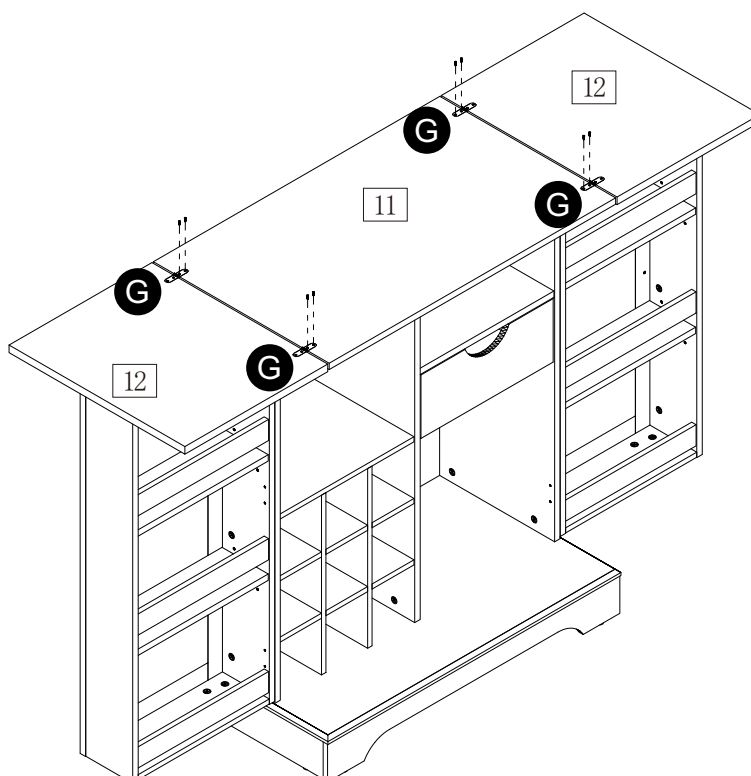

Install another side of part(G) on the gap of part(11)

Assembly instructions





Step 34

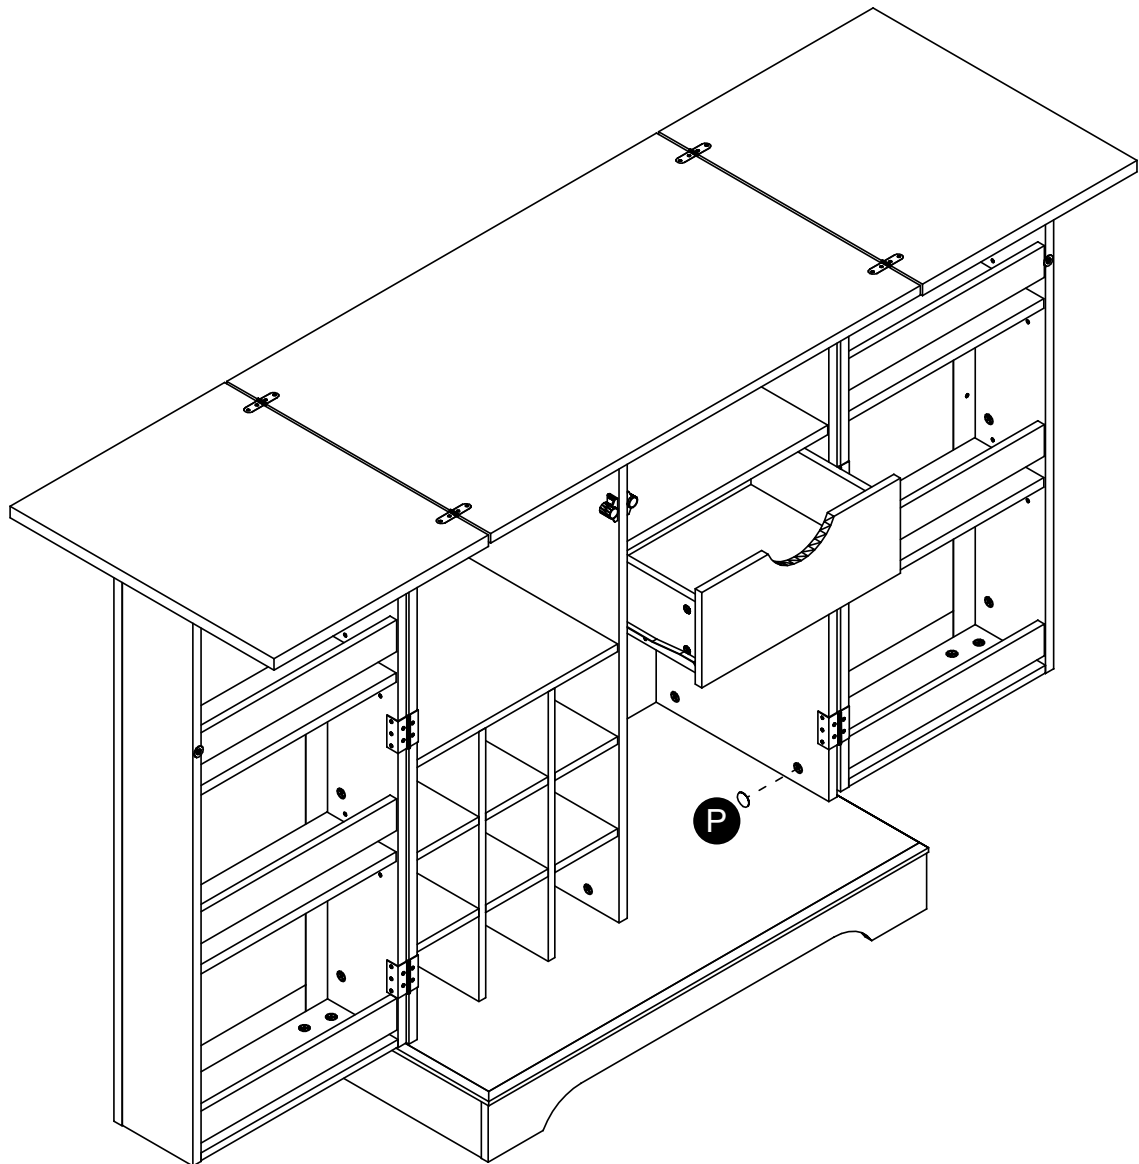

Use sticker (P) to cover screw holes

Assembly instructions




Step 35

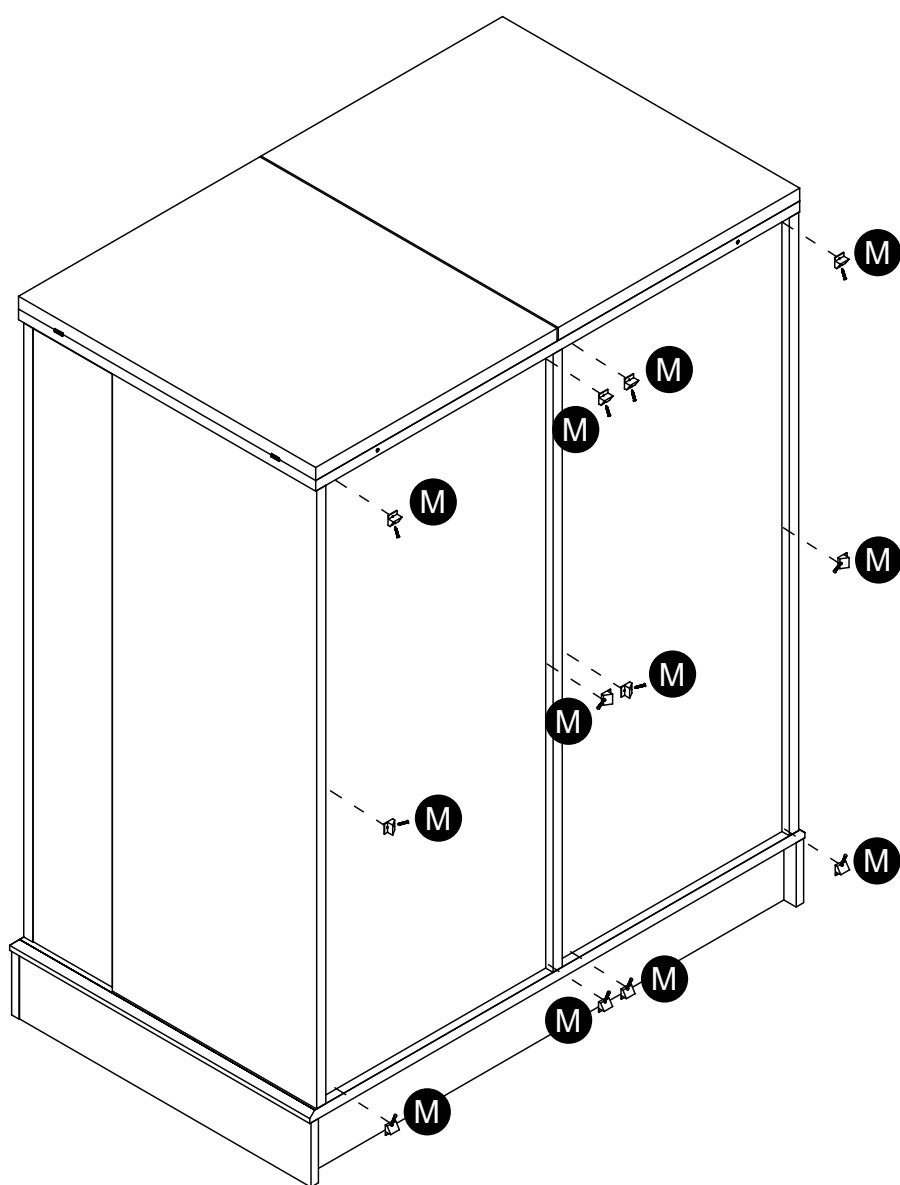

Install the Back Panel Stiffener (M) on the back panel

Assembly instructions

Step 36

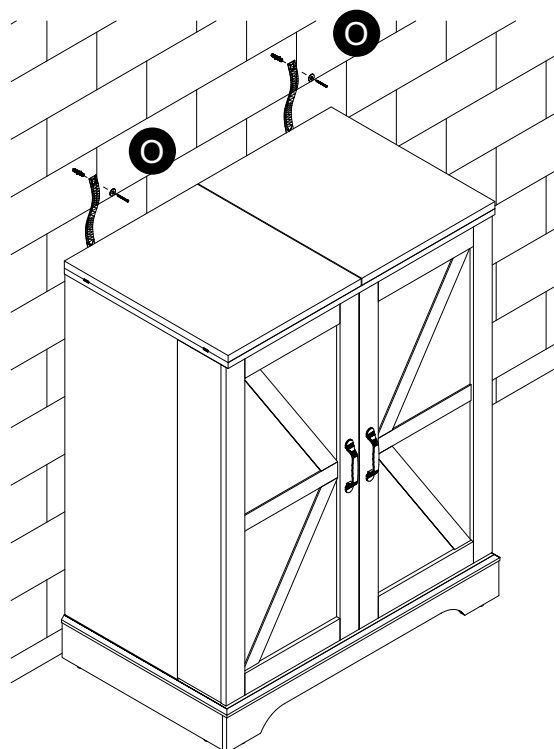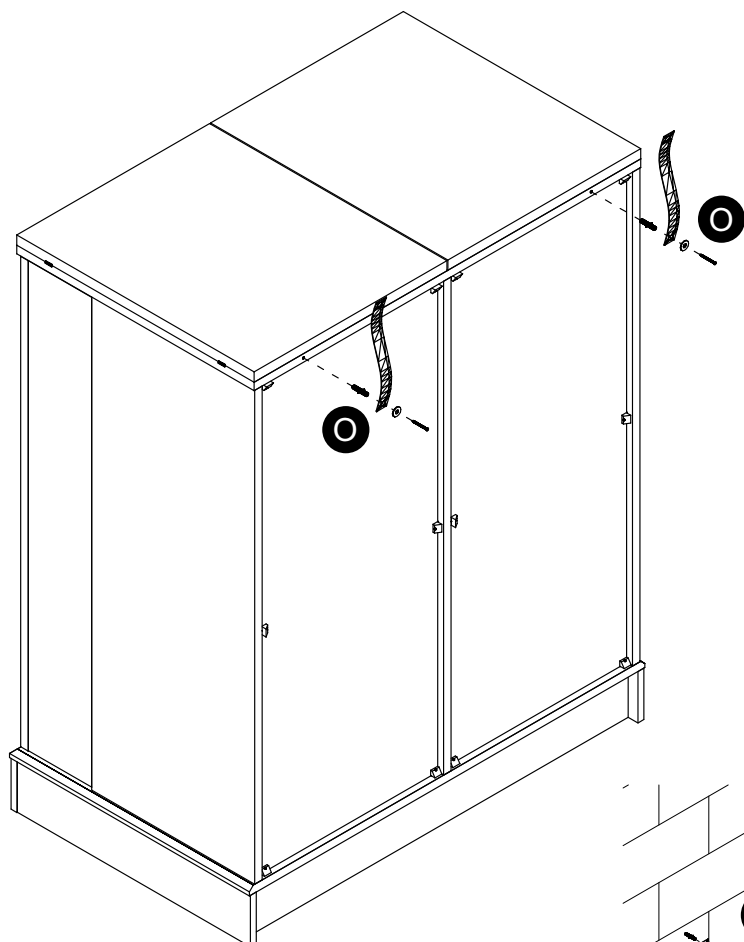

As required, install one side of part(O) on the part(11), install the other side of part(O) on the appropriate position

A Guide to Wall Mounting & Fixings

Important note:



Important: when drilling into walls always check that there are no hidden wires or pipes etc.

If plastic wall plugs (rawl plugs) are supplied with your product, e.g.:




–these are only suitable for use in masonry walls.

If you are in any doubt about the correct wall plugs for your wall, seek professional advice.

Failure of the product due to using the incorrect fixings is the responsibility of the installer.

Make sure that the screws and wall plugs being used are suitable for **supporting your unit**. Consult a qualified tradesperson if you are unsure.


Hints:

- 1: General rule:  always use a larger screw and wall plug if you are not sure.
- 2: Ensure you use the recommended drill bit to match the wall plug and hole size.
- 3: Ensure you drill the hole horizontally; do not force the drill or enlarge the hole.
- 4: Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.
- 5: Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types of walls


You can use one of the following types of wall plug if your walls are made of brick breeze block, concrete, stone or wood.

No.1 "General Purpose" wall plug

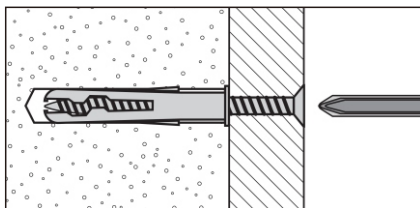


Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

No.3 "Cavity Fixing" wall plug

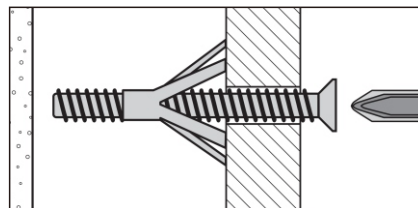


For use with plasterboard partitions or hollow wooden doors.

No.5 "Hammer Fixing" wall plug

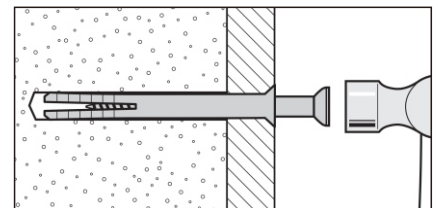


For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

No.2 "Plasterboard" wall plug

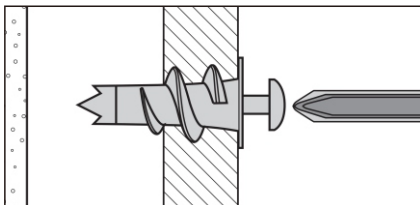


For use when attaching light loads onto plasterboard partitions.

No.4 "Cavity Fixing - Heavy Duty" wall plug

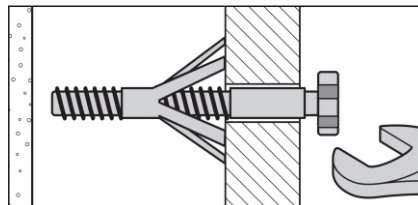

For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.

No.6 "Shield Anchor" wall plug - heavy loads

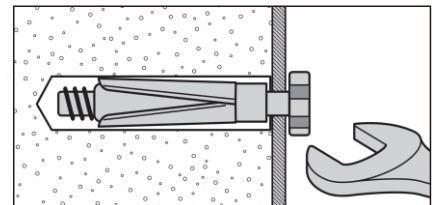

For use with heavier loads such as TV and HiFi speakers and satellite dishes etc.



Care & Maintenance

Safety: always check the fitting and location to ensure your safety in and around the home

Fitting: from time to time check the fitting to ensure the wall plugs or screws do not become loose