
Sideboards

Assembly Instruction – Please keep properly for future reference.

If you find any missing boxes, damaged parts, or accessory shortages, please contact the customer service team of your purchasing channel immediately. We will resolve the issue as quickly as possible.

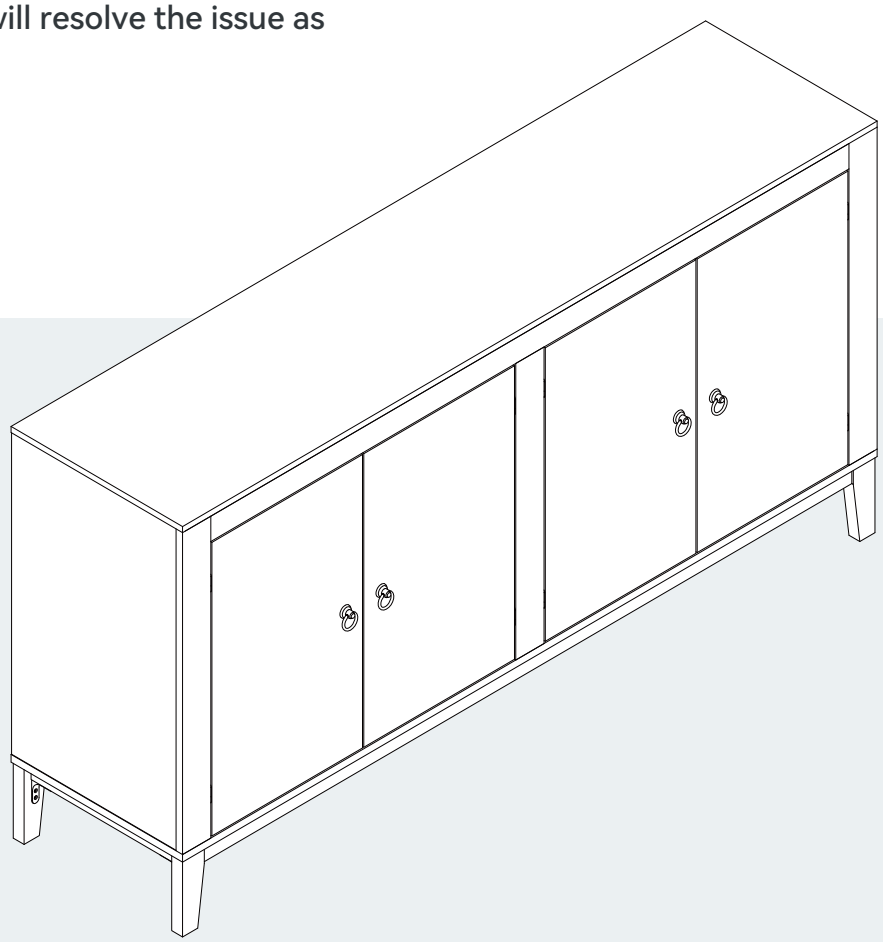

CONTACT US

- **Email: service@grandtunnel.com**
  In order to receive assistance more quickly, please provide

THE FOLLOWING INFORMATION:

- Order number
- Purchase platform
- Purchase date
- Detailed description of the issue along with photos (if applicable)

Important – Please read these instructions carefully before starting the installation.

EN

EN

Before Assembly

Thank you for choosing our product!
To ensure a smooth installation process, please read this guide carefully to familiarize yourself with the required tools, materials, and installation steps.
Follow the relevant sections to avoid any damage caused by improper installation, and make sure to review all operation and safety guidelines for correct installation procedures.


Packaging Notice:

If you find any missing boxes, damaged parts, or accessory shortages, please contact the customer service team of your purchasing channel immediately. We will resolve the issue as quickly as possible.

Safety and Care Advice

Important :
Please read these instructions fully before starting assembly.

- Check you have all the components and tools listed on the following pages.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.
- During assembly do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.



- To reduce the likelihood of damaging your product please ensure that your power drill is set on a low torque setting.

Email : **service@grandtunnel.com**

Care and Maintenance

- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal center.

Handy Hints

- Assemble all parts and bolts loosely during assembly, only once the product is complete should you fully tighten the bolts.
- Regularly check and ensure that all bolts and fittings are tightened properly.

Warning

In order to help prevent overturning, please follow these instructions.

- Use the anti tip strap or wall fixing method provided (if applicable).
- Do not allow children to climb or hang on the furniture.
- Do not open more than one drawer at a time.
- Do not place heavy items in the top drawers.
- Do not place heavy items on top of the furniture, unless the furniture has been designed for this purpose.
- Please note that only the anti tip strap is provided. You will need to provide wall plugs and screws applicable for your wall type.

Customer Service Guide

Thank you for choosing our product! We are committed to providing you with excellent service. If you find any missing parts, damaged packaging, or product damage after receiving all packages, please follow the steps below to quickly contact our customer service team. We will do our best to resolve your issue.

1. Missing Parts

Verify Parts:

1. Refer to the “Parts List” in the manual to verify the name, specifications, and quantity of the missing parts.
2. Take a clear photo of the parts list and mark the missing parts with detailed information, e.g., “Missing 5 pieces of M6×30mm screws.”

Contact Us:

By Email:

Send an email to **service@grandtunnel.com**, with the subject line “Missing Parts Issue.” Include the following in the email:

- A description of the missing parts and a photo of the parts list.
- Order details (order number, purchase platform, purchase date).

2. Product or Packaging Damage

If it affects normal use:

Steps:

1. Take clear photos or videos showing the damaged parts and the extent of the damage (multi-angle shots are recommended).
2. Email the photos/videos along with order details to **service@grandtunnel.com**, with the subject line “Product Damage Issue.”

Resolution:

After verification, we will arrange for a replacement part, product exchange, or refund as quickly as possible.

Email : **service@grandtunnel.com**

If it does not affect normal use:

Steps:

1. Contact our customer service team (by email: **service@grandtunnel.com**).
2. Provide a description of the damage and include relevant photos or videos.

Resolution:

We will provide repair guidance or an appropriate compensation plan based on the specific situation.

Contact Us:

Customer Service Email: **service@grandtunnel.com**

Helpful Tips

To process your issue efficiently, please prepare the following information:


- Order details (order number, purchase platform, purchase date).
- Clear photos or videos.
- We are committed to providing quick and professional solutions, no matter the size of the issue, to ensure your satisfaction.

Thank you for your trust and support!
We hope you enjoy using our product!


EN

Parts List - Panels


Please check you have all the panels listed below.

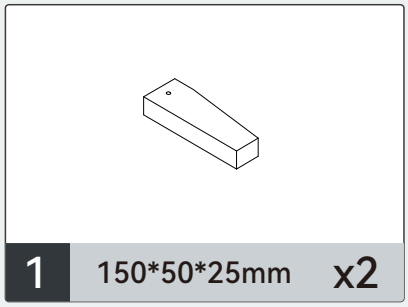


1 150*50*25mm x2

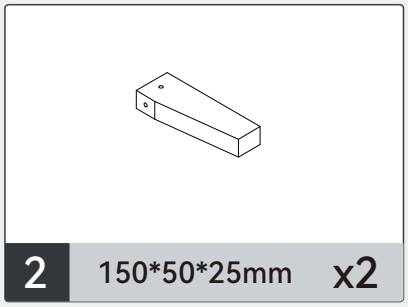


2 150*50*25mm x2

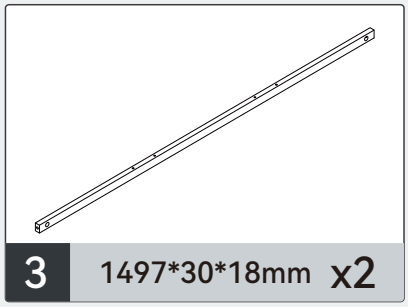


3 1497*30*18mm x2

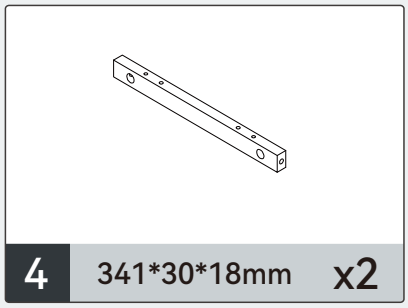


4 341*30*18mm x2

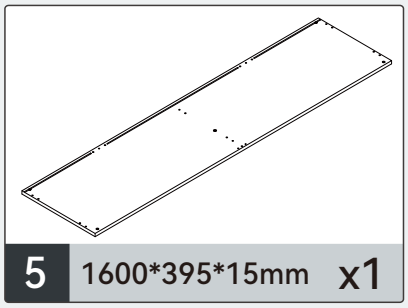


5 1600*395*15mm x1

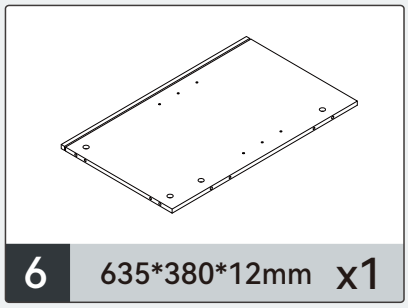


6 635*380*12mm x1

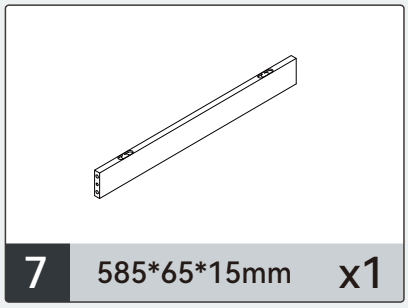


7 585*65*15mm x1

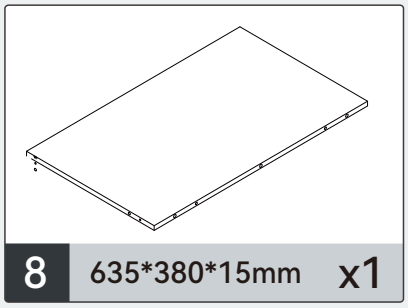


8 635*380*15mm x1

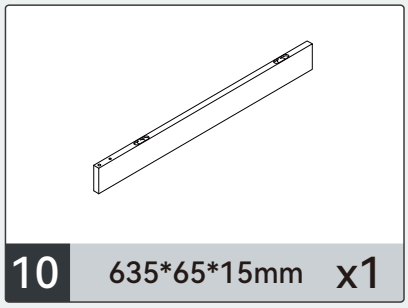


10 635*65*15mm x1

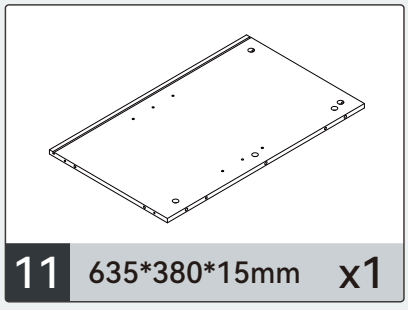


11 635*380*15mm x1

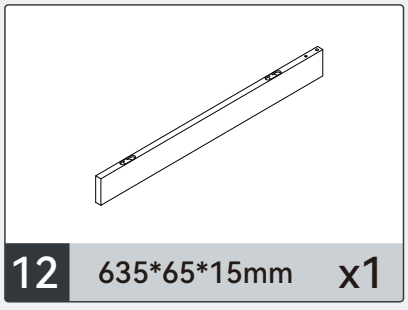


12 635*65*15mm x1

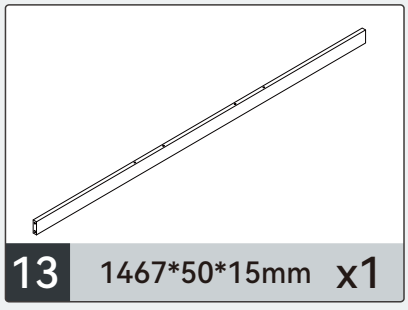


13 1467*50*15mm x1

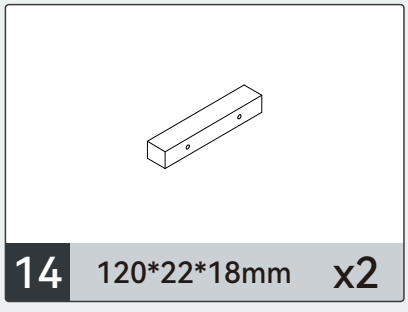

14 120*22*18mm x2

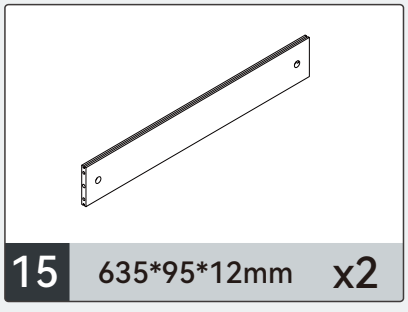


15 635*95*12mm x2

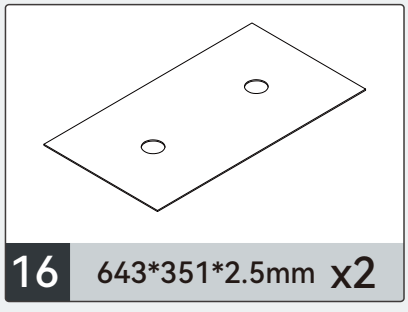


16 643*351*2.5mm x2


Email : **service@grandtunnel.com**

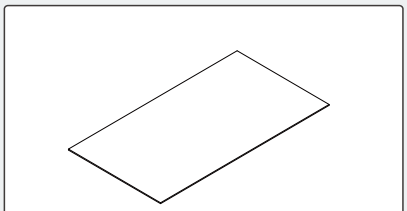


17 635*351*2.5mm x2

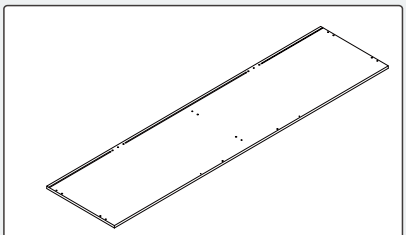


18 1600*395*12mm x1

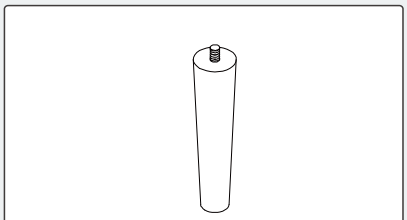


19 143*40*25mm x1

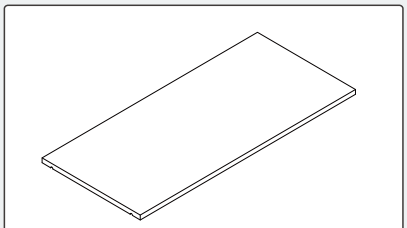

20 780*355*15mm x1

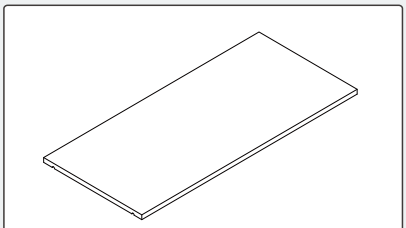

21 780*355*15mm x1

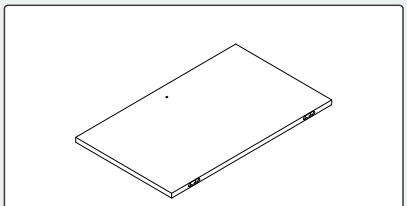




22 578*349*15mm x4

EN



Parts List - Fittings

Please check you have all the fittings listed below.

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied are required.

 A Ø7*43mm x30	 B Ø15*9.6mm x30	 C Ø6*30mm x40
 D 3.5*12mm x24	 E Ø5*40mm x20	 F x1
 G x4	 H x8	 I x16
 J x4	 K Ø4*20mm x32	 L x8
 M x2	 N x4	 O x4
 P Ø4*25mm x4	 Q x2	

Email : **service@grandtunnel.com**

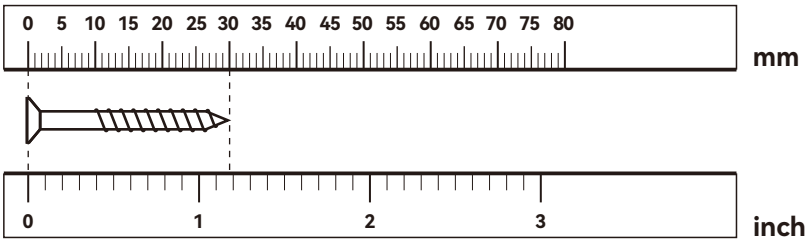
Tools required	 Phillips screwdriver (medium & large)
Ruler Use this ruler to help correctly identify the screws	 **The screws length is measured from the head to the point (30mm screw shown).**

Using Camlocks

Step 1


Connect the male camlock as directed in the assembly instructions using a screwdriver.

DO NOT OVER TIGHTEN.

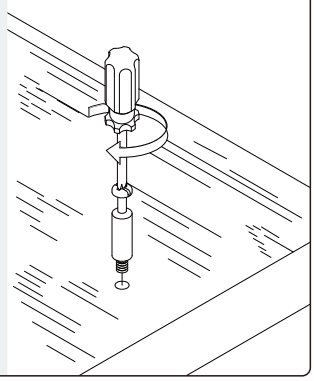

Step 2


Push the male camlock into the entry hole.

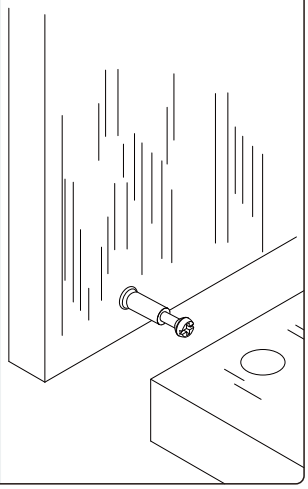

Step 3

Insert the female camlock as shown in the instructions.

Note: ensure that the arrow on the top of the camlock points towards the entry hole for the male camlock.

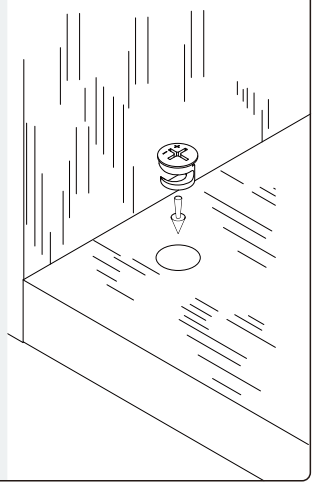


Step 4

Turn the female camlock clockwise with a screwdriver.


You should feel a click when the camlock is locked in place.


The joint is now secure.

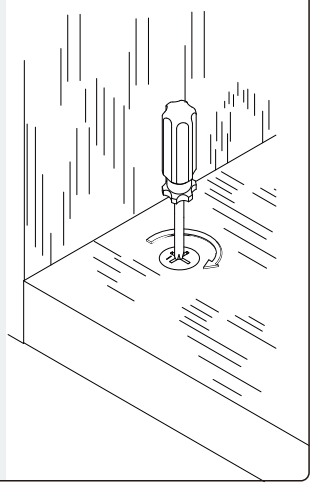

EN

Assembly Instructions

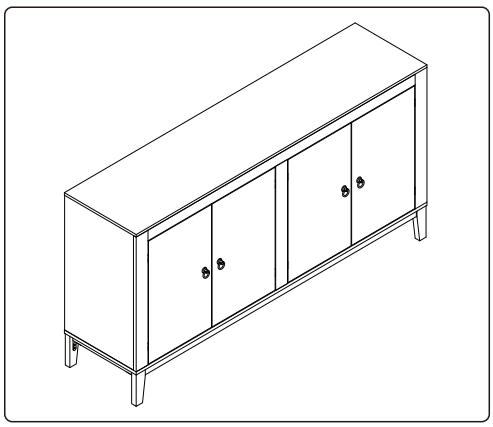

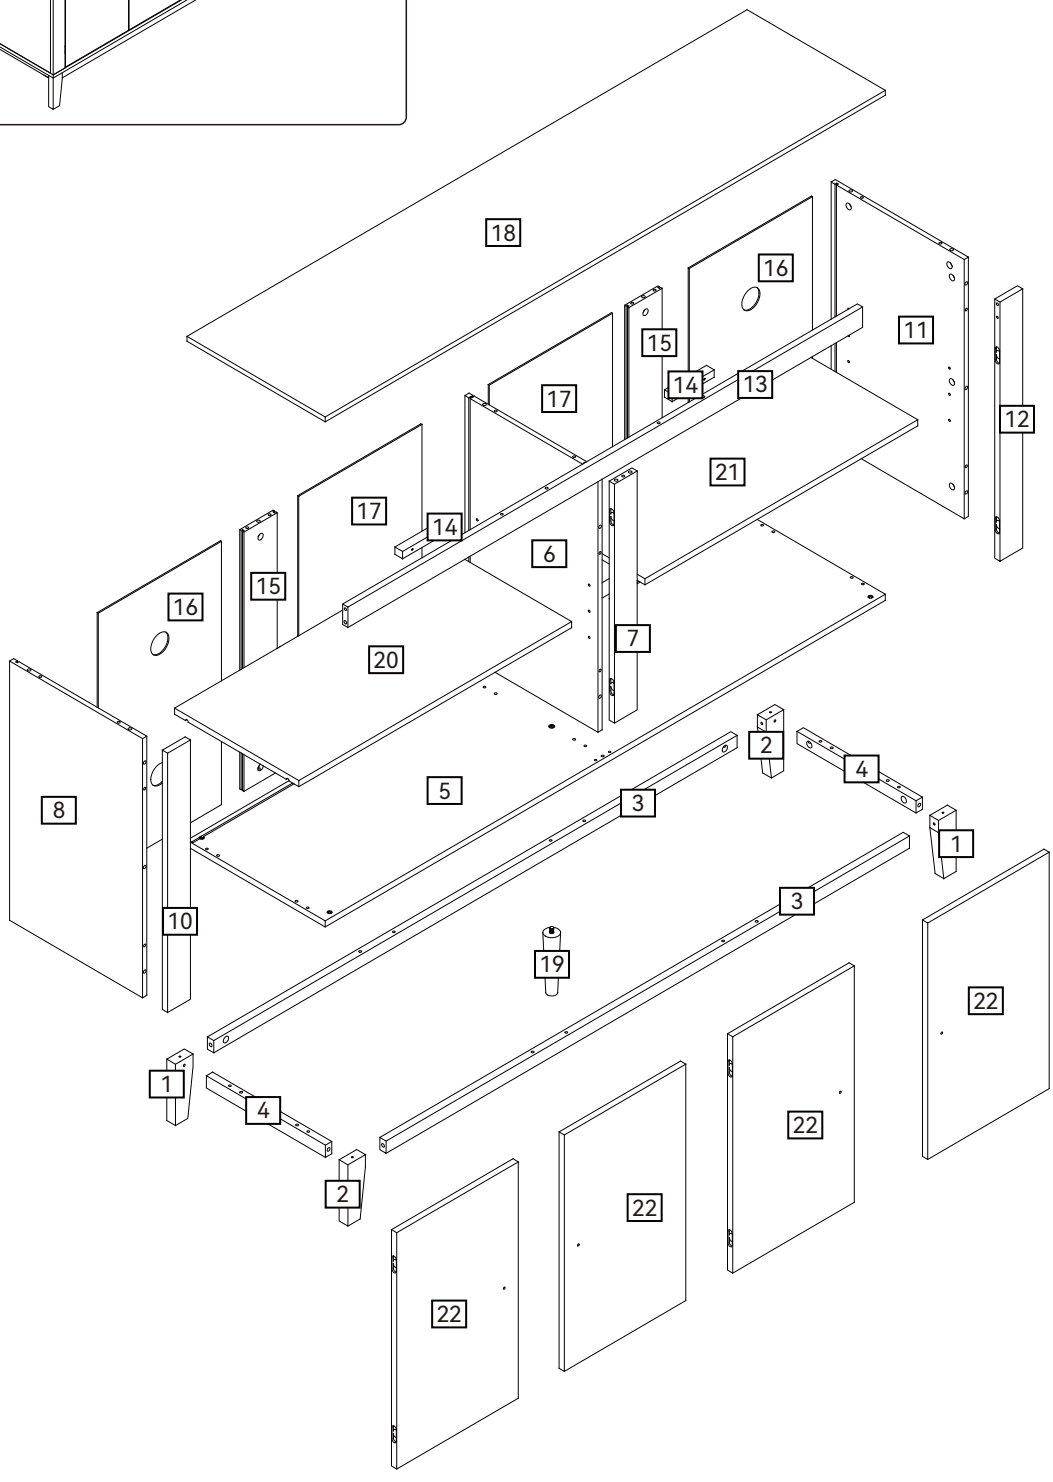


Email : **service@grandtunnel.com**


Step 1

A




Ø7*43mm x8

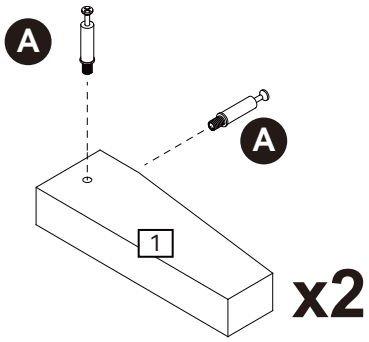

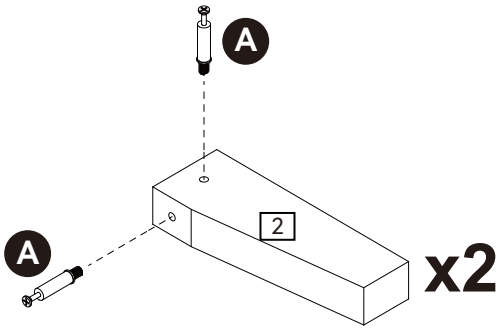

CAM-LOCK
Tighten until shoulder is flush with panel.Do not overtighten or undertighten(see example below)

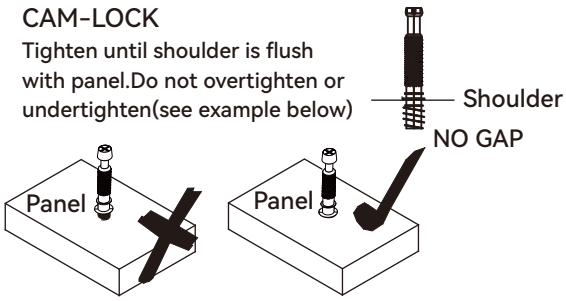

Screw 2-in-1 connector bolt (A) into panels (1) and (2).


Step 2


B



Ø15*9.6mm x4

Connect panels (1), (2), and (3).
Insert cam lock (B) into panel (3) and tighten it.

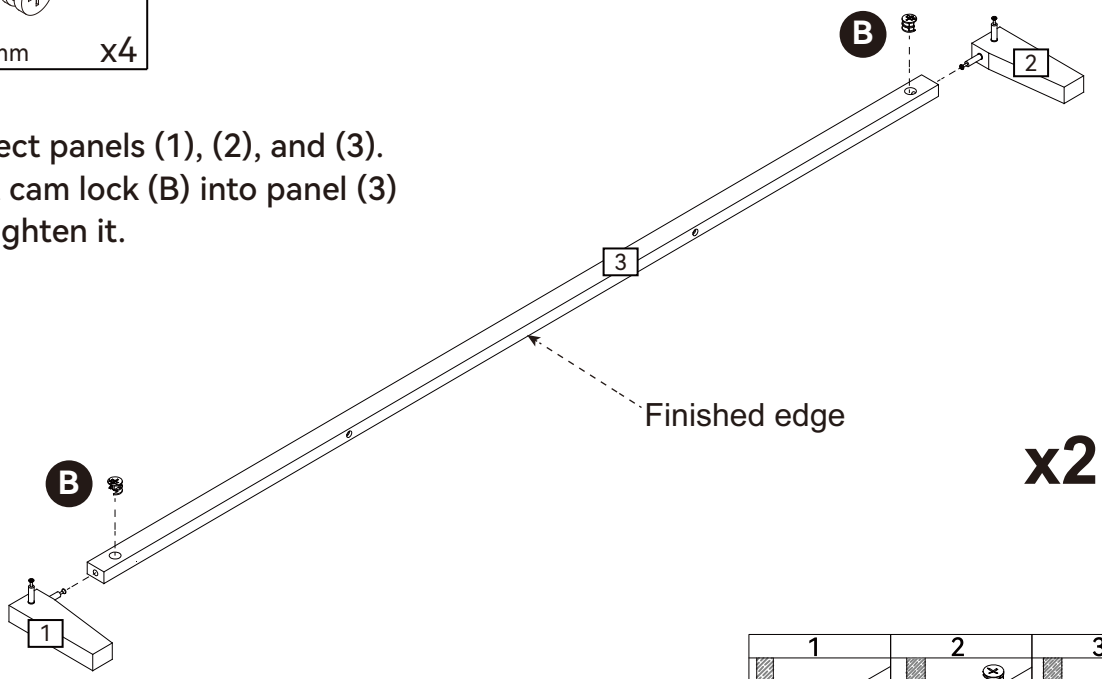

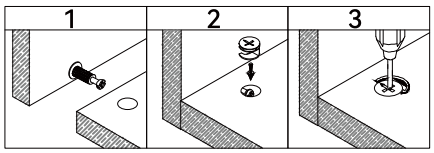

EN

Step 3

B



Ø15*9.6mm x4

Connect panel (4) to panels (1) and (2). Insert cam lock (B) into panel (4) and tighten it.


Step 4

C



Ø6*30mm x8

Insert wooden dowel (C) into panel (5).

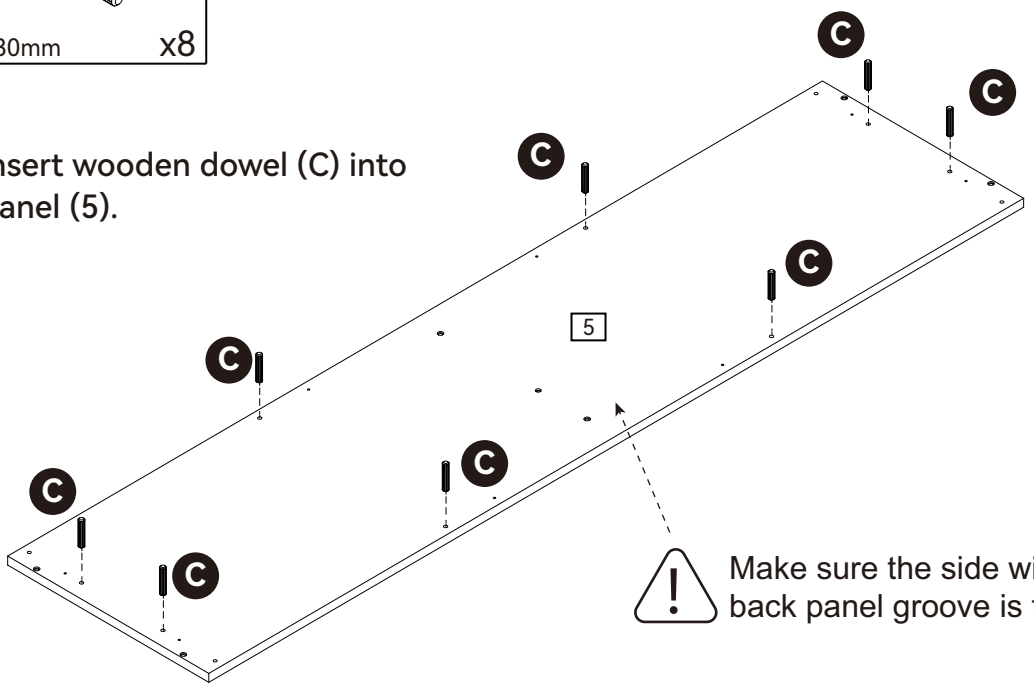

Make sure the side with the back panel groove is facing down.


Email : **service@grandtunnel.com**

Step 5

E

Ø5*40mm x8

Use screw (E) to secure panels (3) and (4) to panel (5).

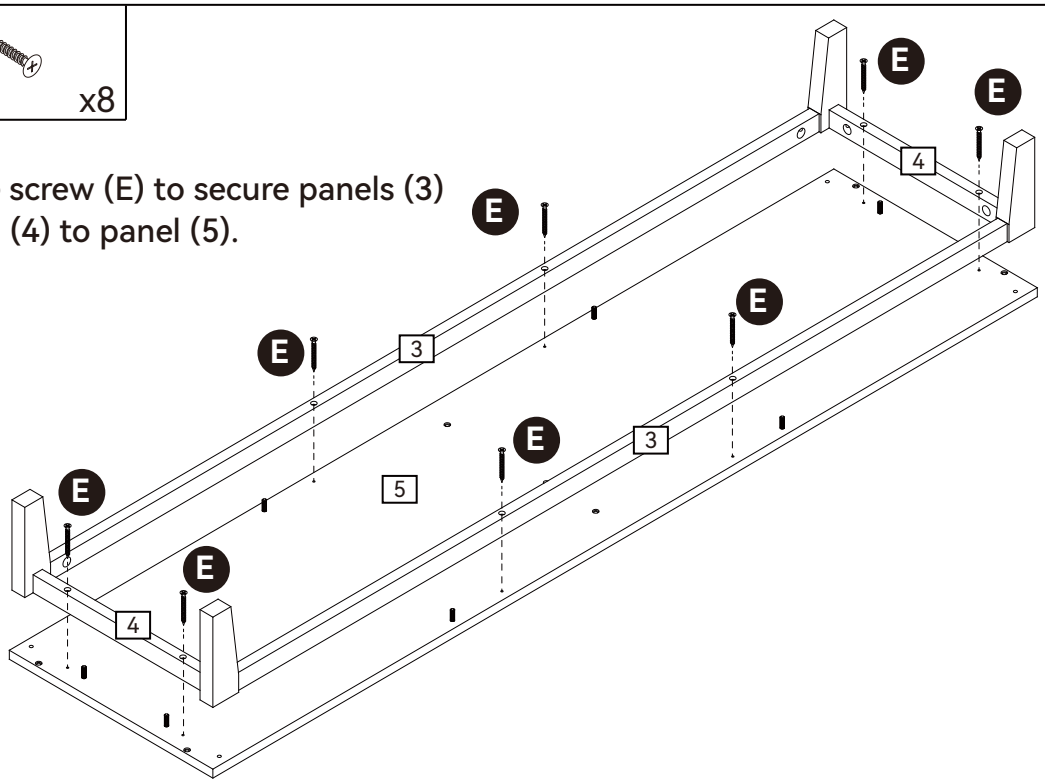

Step 6


D

Ø3.5*12mm x16

O

x4


Use screw (D) to secure corner bracket (O) to panels (1), (2), and (4).

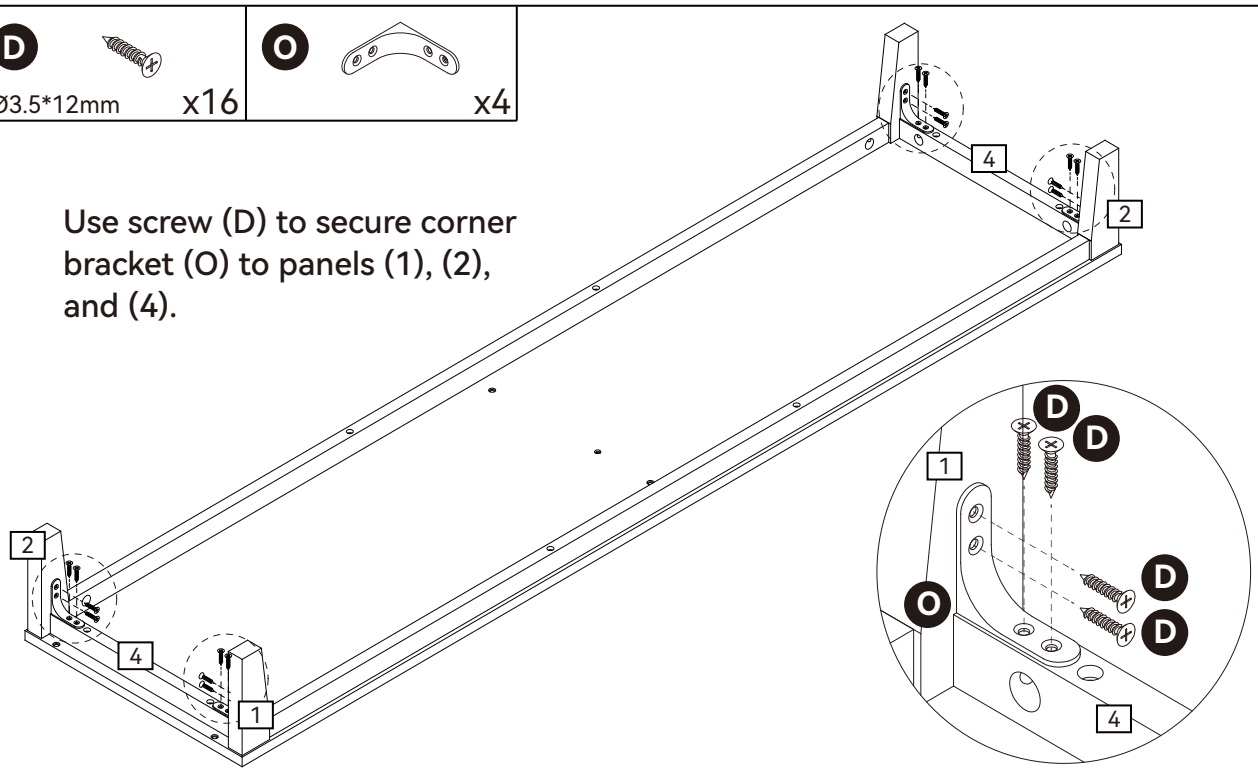

Step 7

E
Ø5*40mm x4

Secure the panel with screw (E).

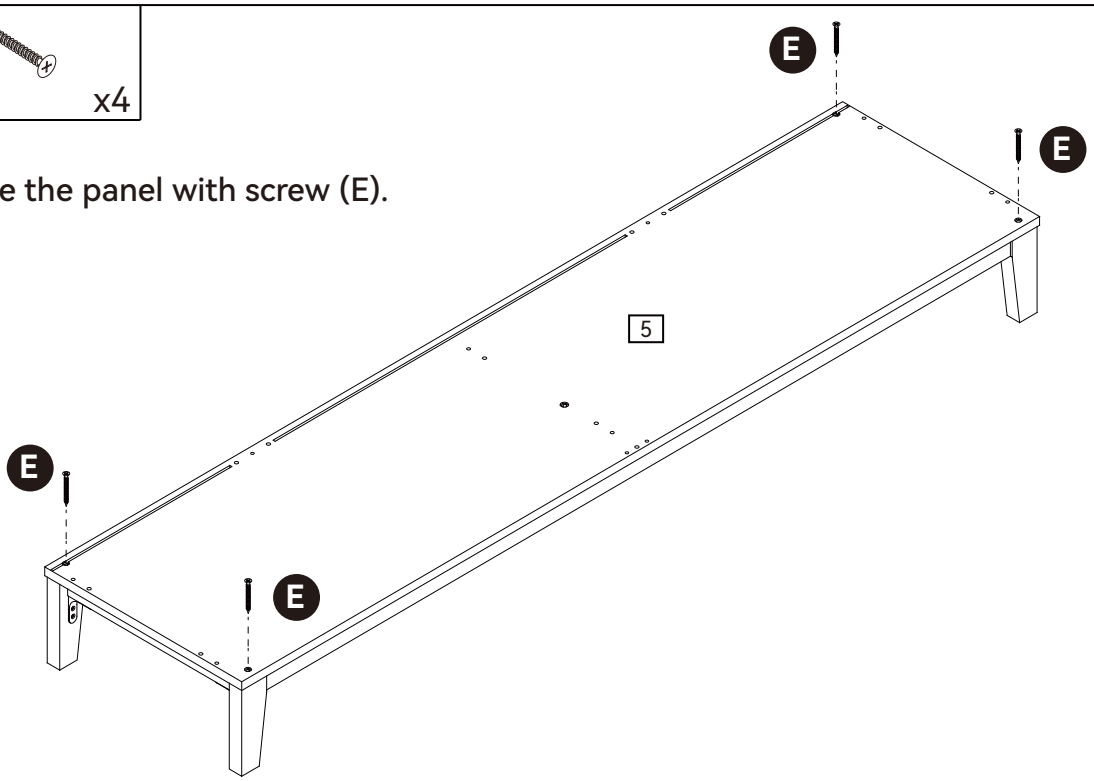


Step 8

A
Ø7*43mm x2


C
Ø6*30mm x8

Insert wooden dowel (C) into panels (6) and (7).
Lock 2-in-1 connector bolt (A) into panel (7).

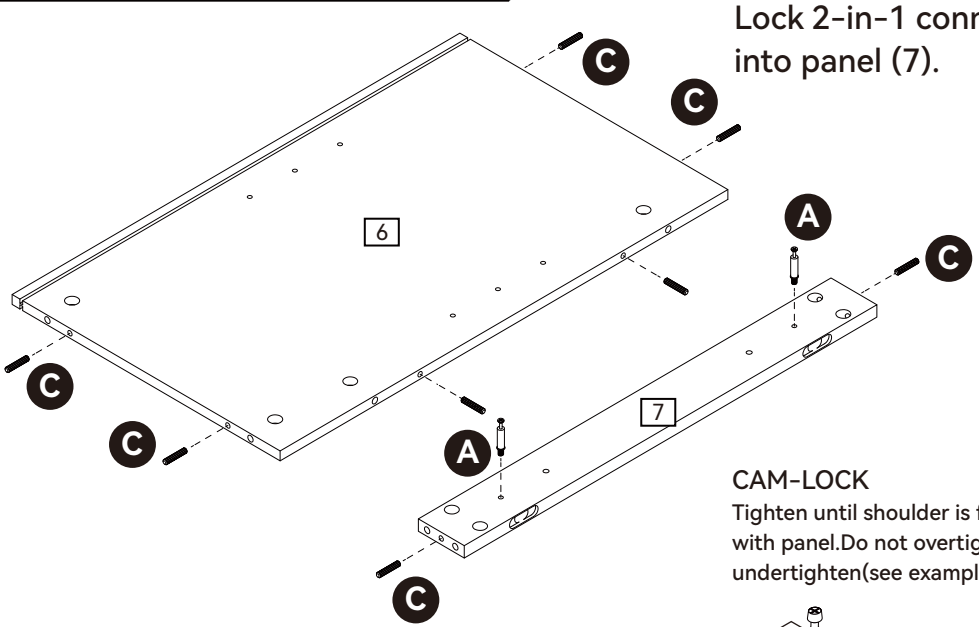

CAM-LOCK
Tighten until shoulder is flush with panel.Do not overtighten or undertighten(see example below)



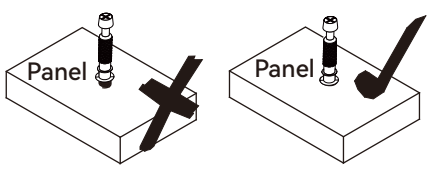


Email : **service@grandtunnel.com**


Step 9

B

Ø15*9.6mm x2

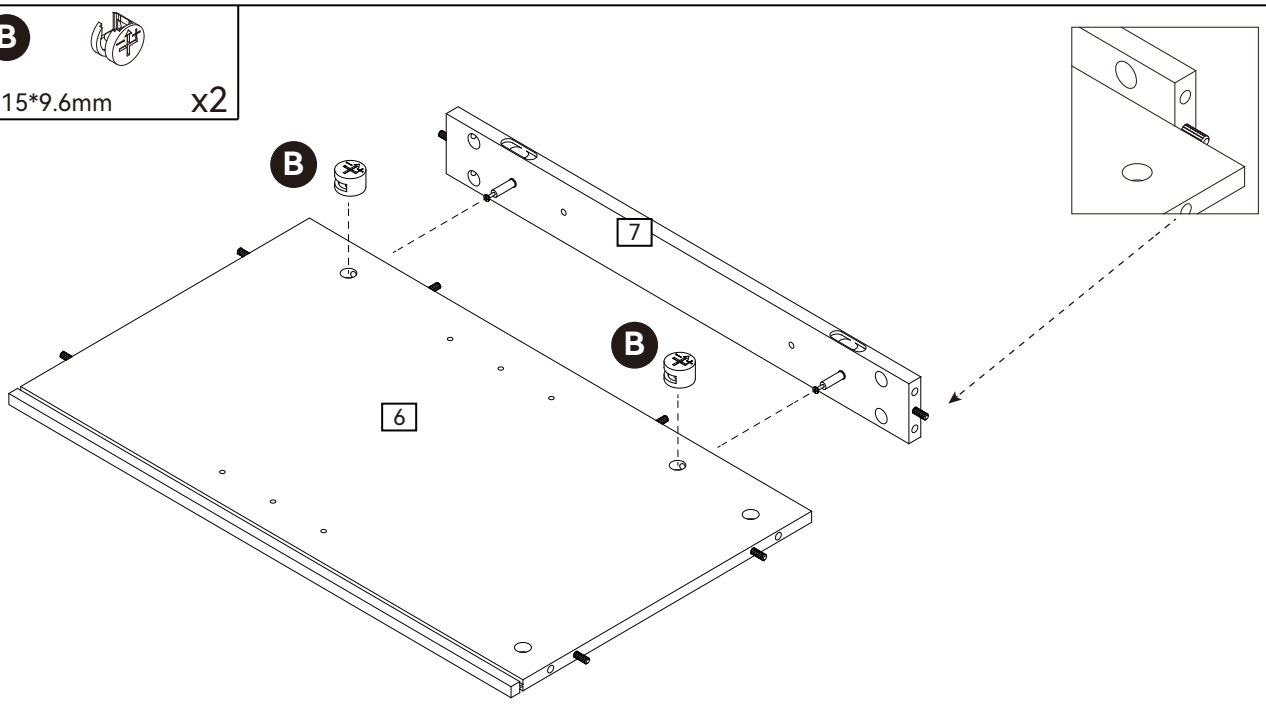

Connect panel (7) to panel (6).
Insert cam lock (B) into panel (6) and tighten it.

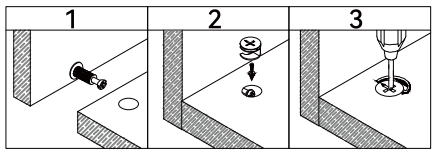

Step 10


A


Ø7*43mm x4


C

Ø6*30mm x6

CAM-LOCK
Tighten until shoulder is flush with panel.Do not overtighten or undertighten(see example below)



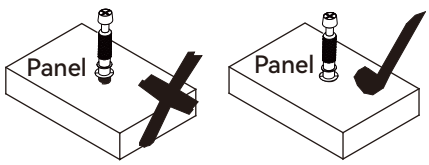

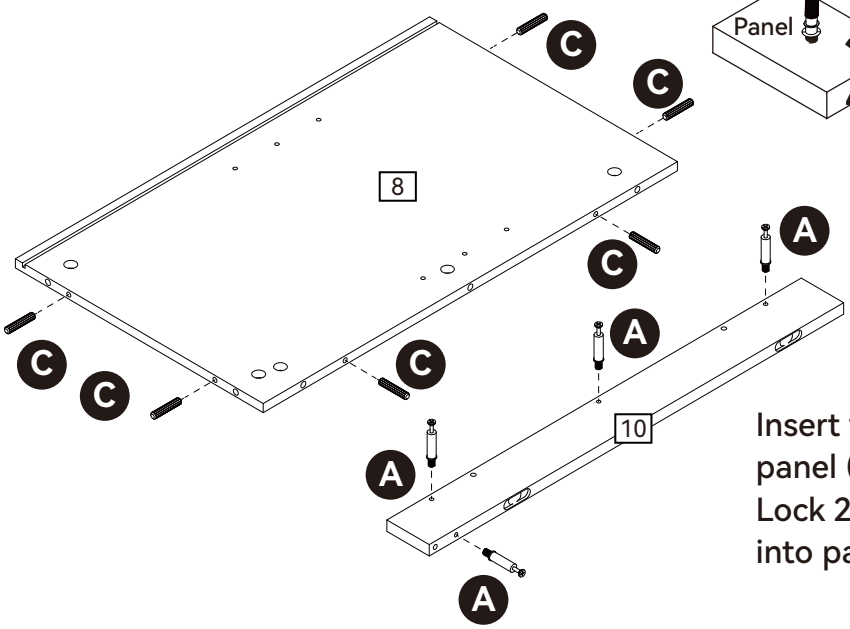


Insert wooden dowel (C) into panel (8).
Lock 2-in-1 connector bolt (A) into panel (10).

EN


Step 11

B

Ø15*9.6mm x3

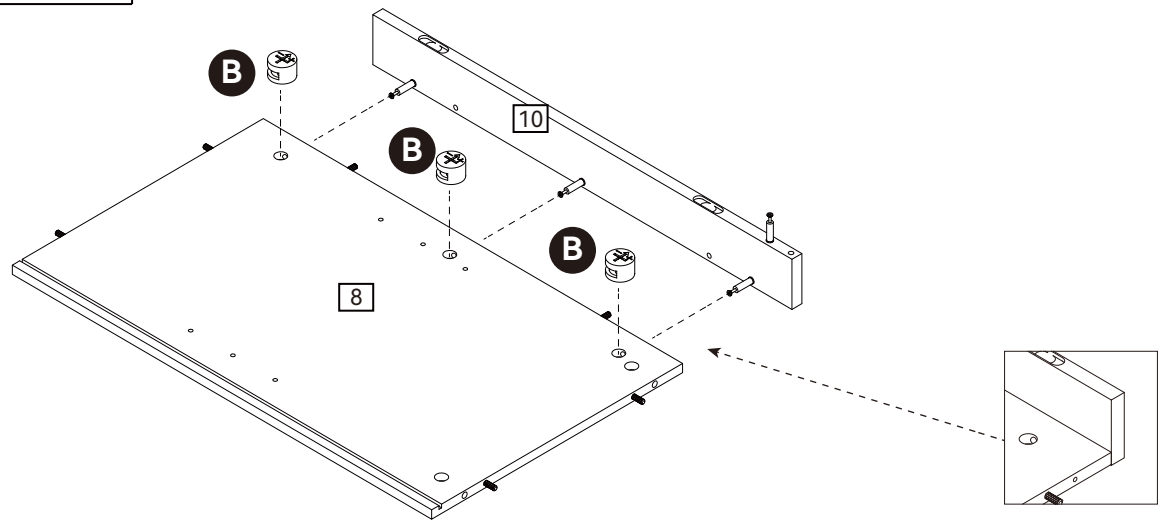

Connect panel (10) to panel (8).
Insert cam lock (B) into panel (8) and tighten it.

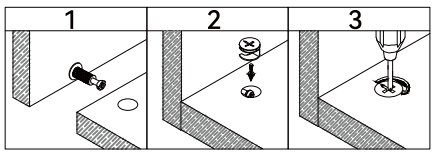

Step 12


A

Ø7*43mm x4

C


Ø6*30mm x6

Insert wooden dowel (C) into panel (11).
Lock 2-in-1 connector bolt (A) into panel (12).

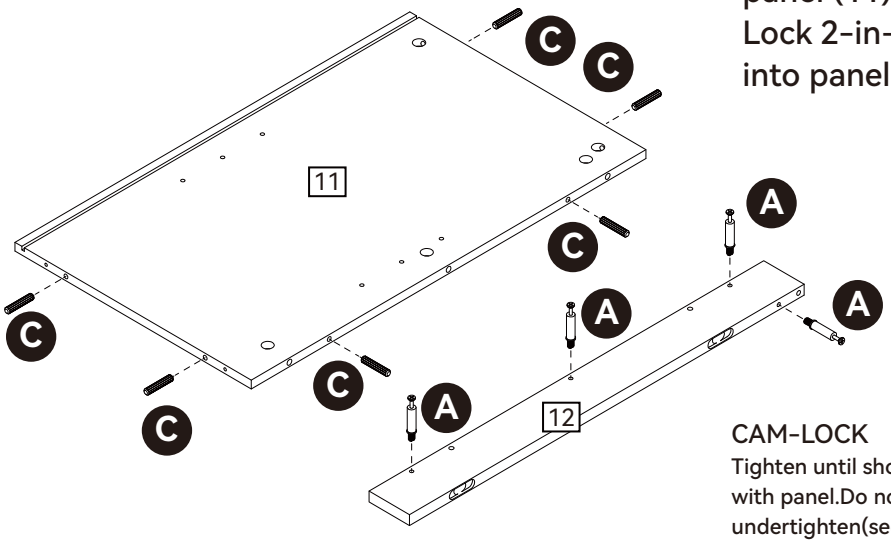

CAM-LOCK
Tighten until shoulder is flush with panel.Do not overtighten or undertighten(see example below)



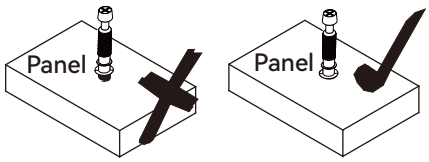


Email : **service@grandtunnel.com**


Step 13

B

Ø15*9.6mm x3

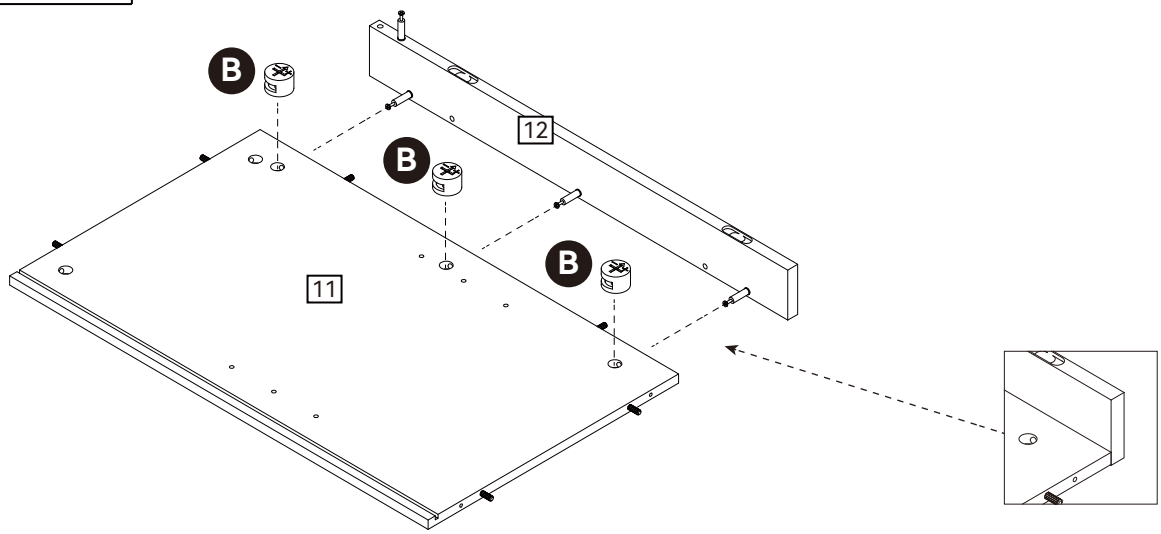

Connect panel (12) to panel (11).
Insert cam lock (B) into panel (11) and tighten it.

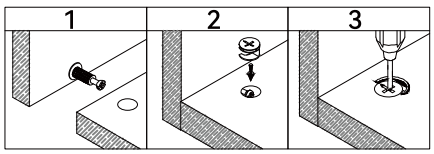


Step 14

P

Ø4*25mm x4

Use screw (P) to secure panel (14) to panel (13).

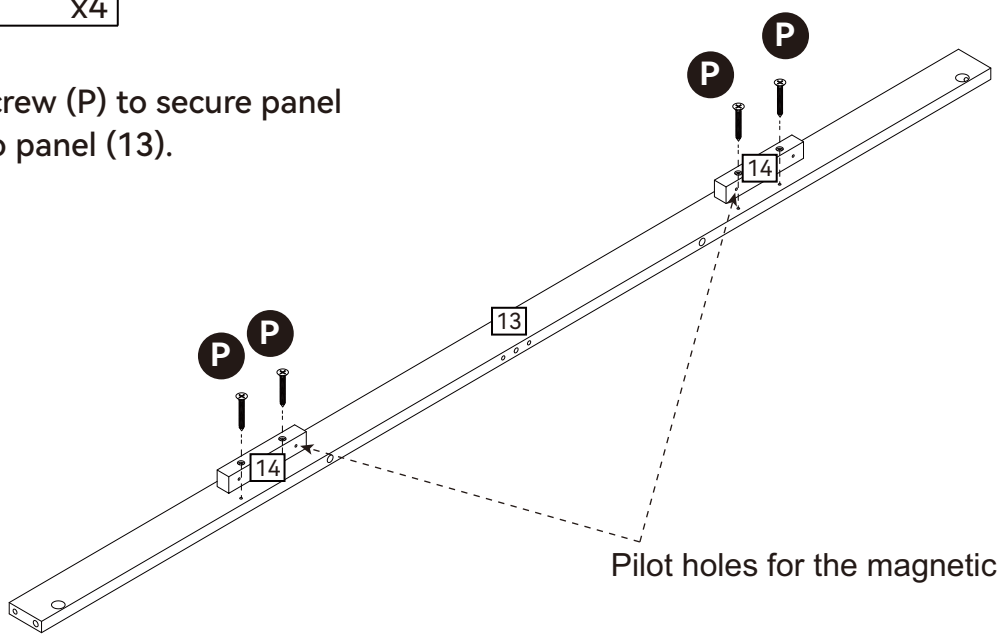


Pilot holes for the magnetic catch.

Step 15


D	M
3.5*12mm x4	x2

Use screw (D) to secure magnetic catch (M) to panel (14).

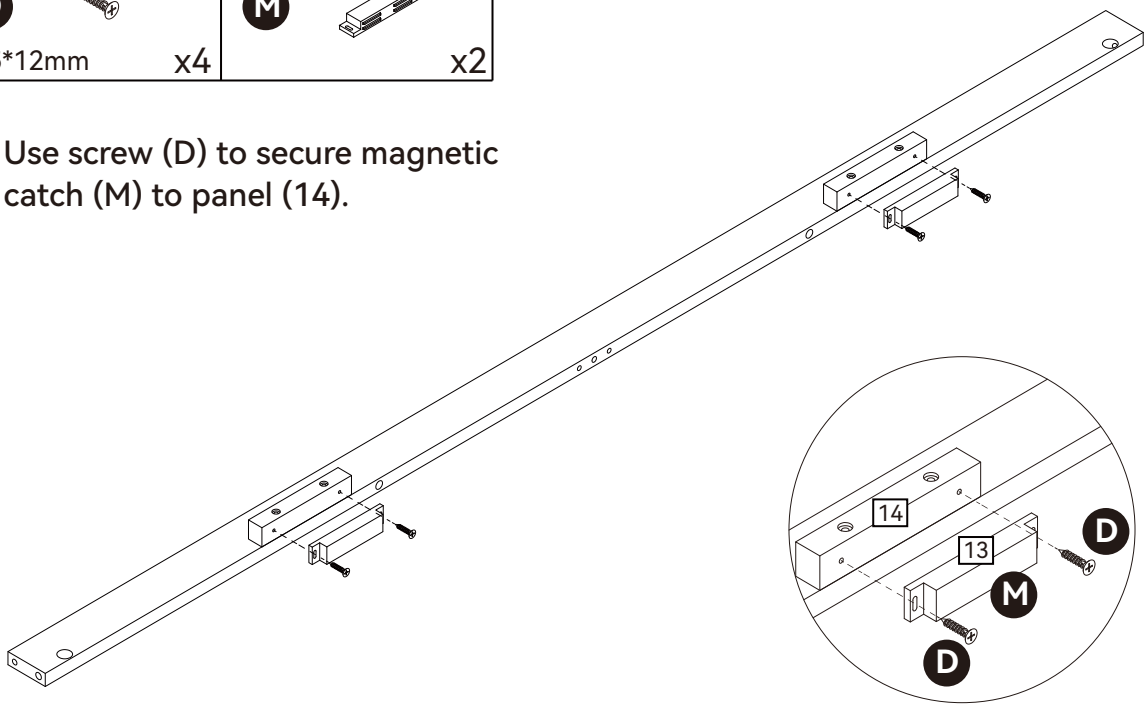

Step 16

A	C
Ø7*43mm x2	Ø6*30mm x4

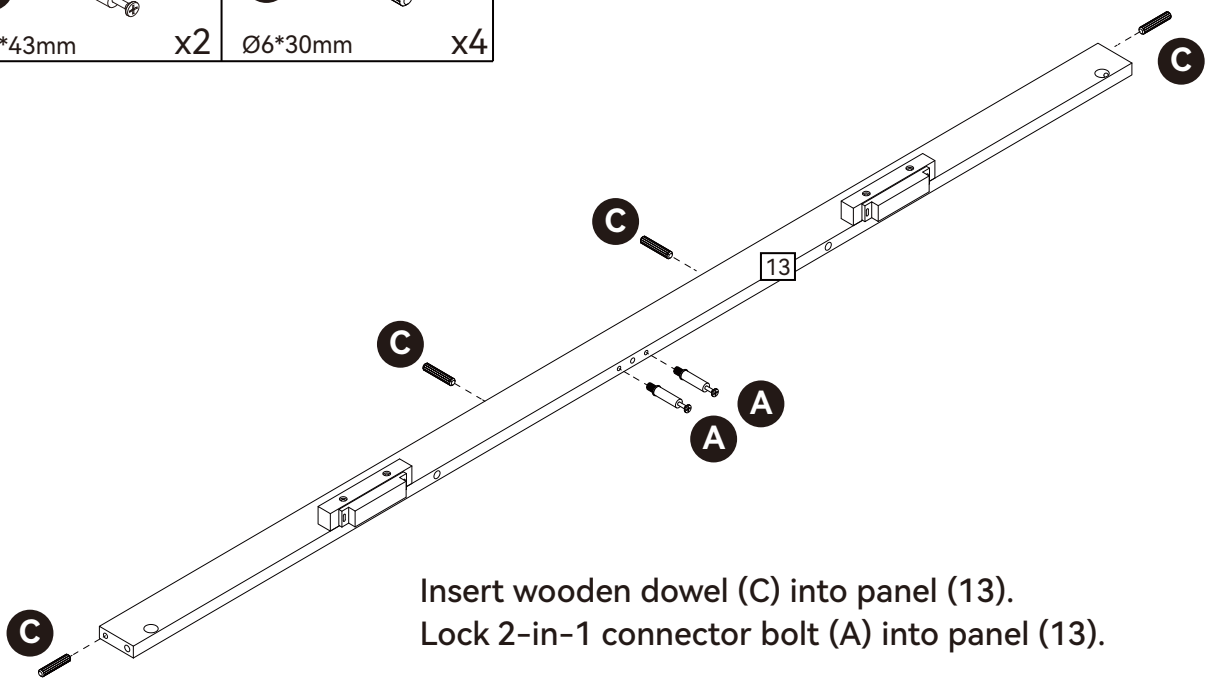

Insert wooden dowel (C) into panel (13).
Lock 2-in-1 connector bolt (A) into panel (13).

Email : **service@grandtunnel.com**

Step 17

B



Ø15*9.6mm x2

Connect panel (13) to panel (7).
Insert cam lock (B) into panel (7)
and tighten it.


Step 18

B




Ø15*9.6mm x2

Connect panels (10), (12), and (13).
Insert cam lock (B) into panel (13)
and tighten it.

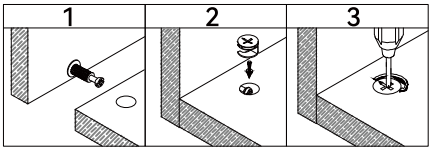


Step 19

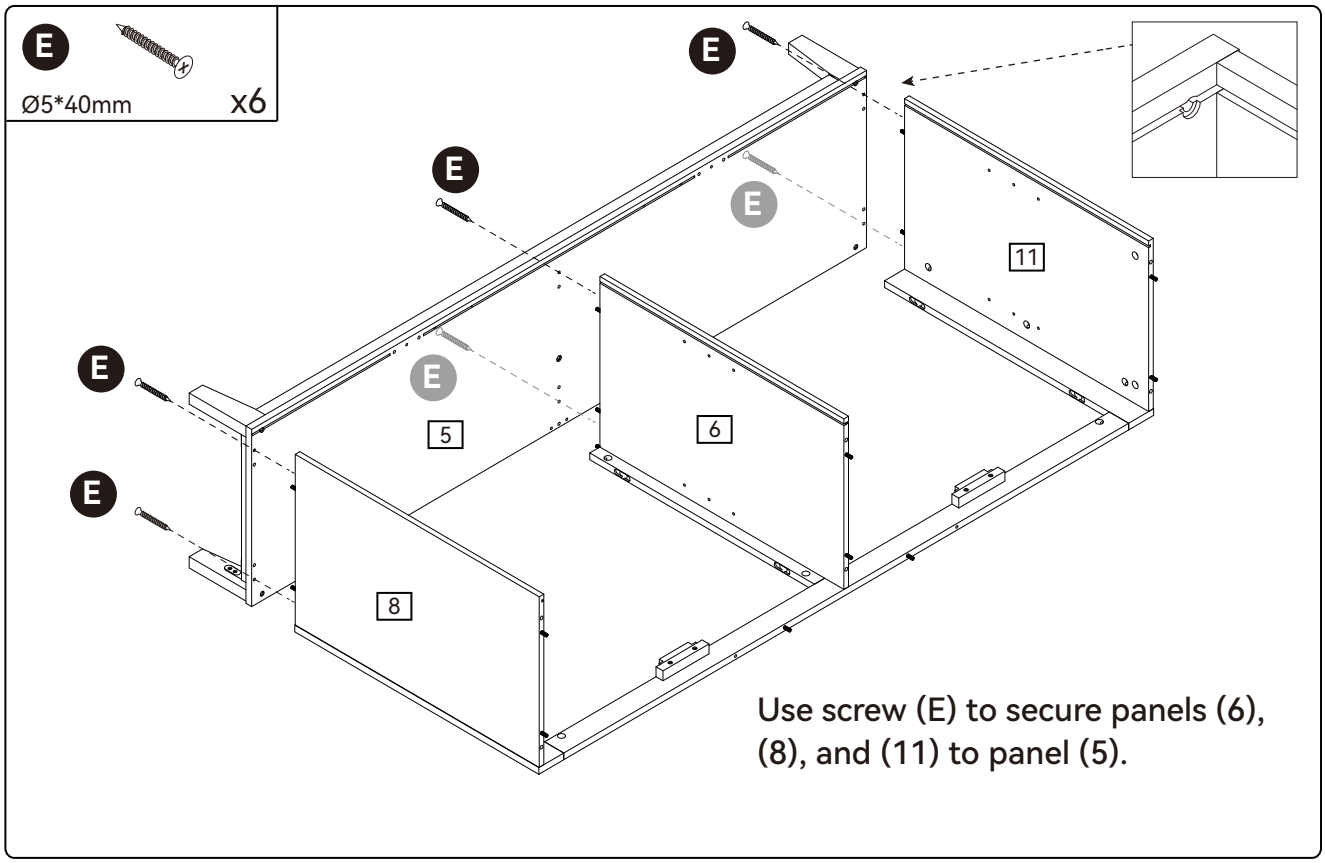

Use screw (E) to secure panels (6), (8), and (11) to panel (5).

Step 20

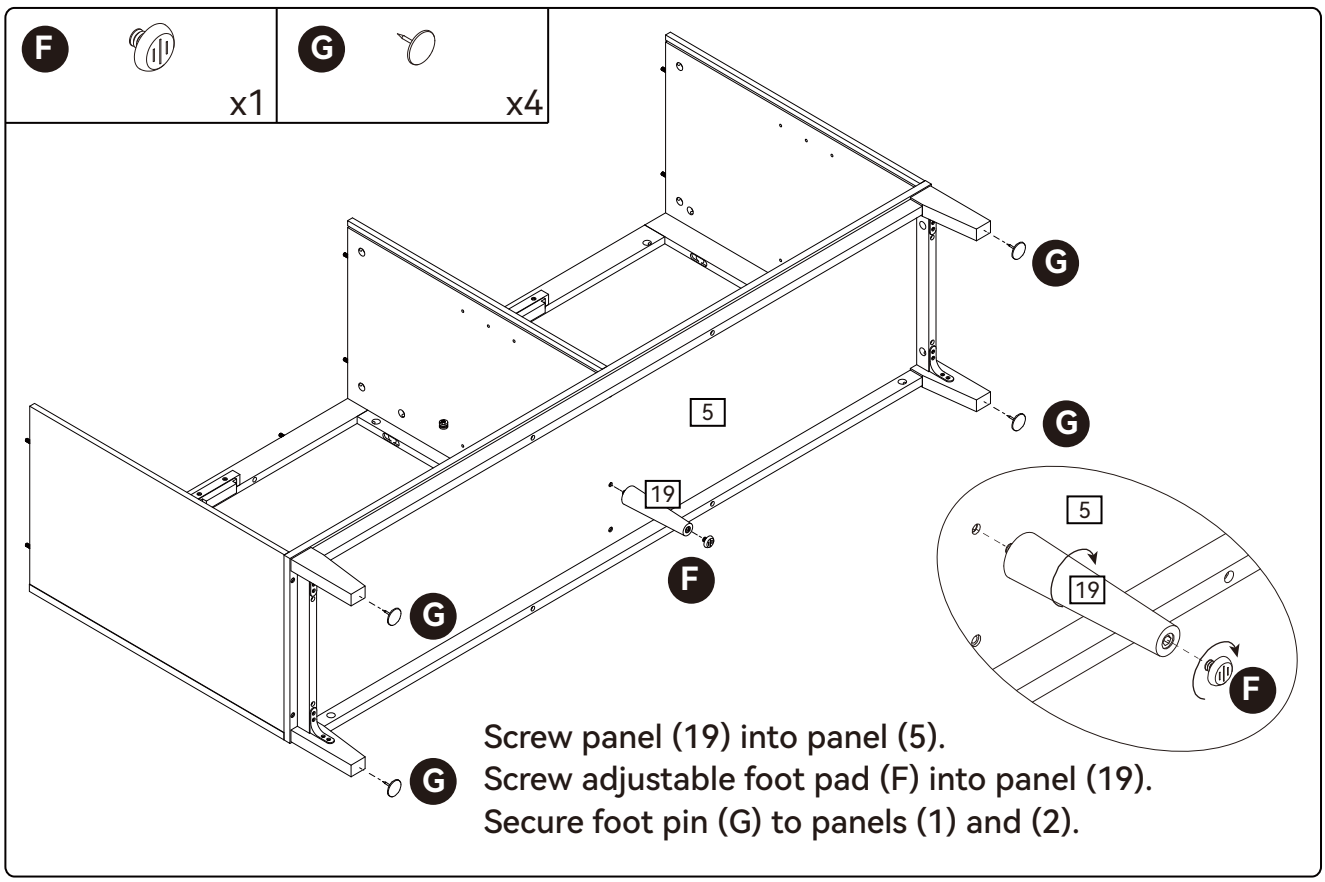


Screw panel (19) into panel (5).
Screw adjustable foot pad (F) into panel (19).
Secure foot pin (G) to panels (1) and (2).

Email : **service@grandtunnel.com**


Step 21

A
Ø7*43mm x2

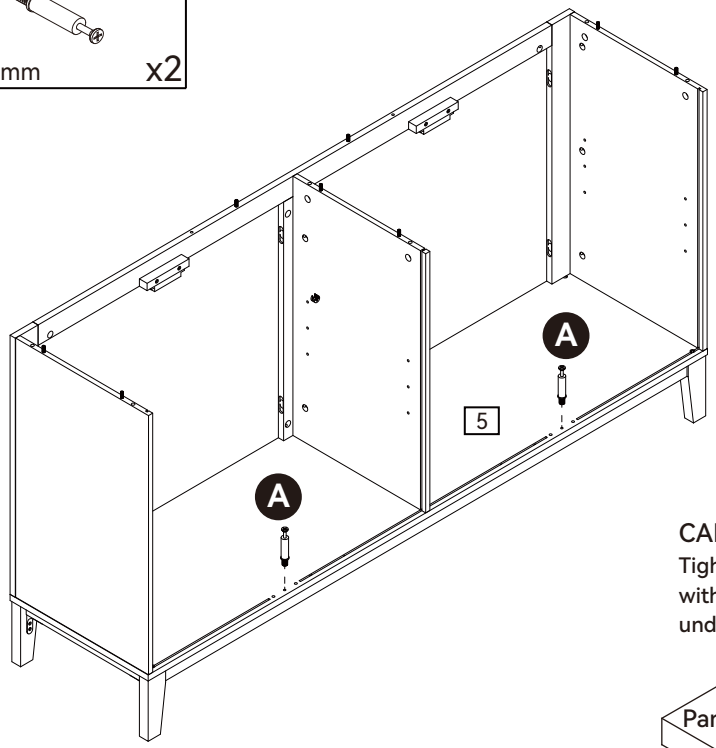


Lock 2-in-1 connector bolt (A) into panel (5).

CAM-LOCK
Tighten until shoulder is flush with panel.Do not overtighten or undertighten(see example below)

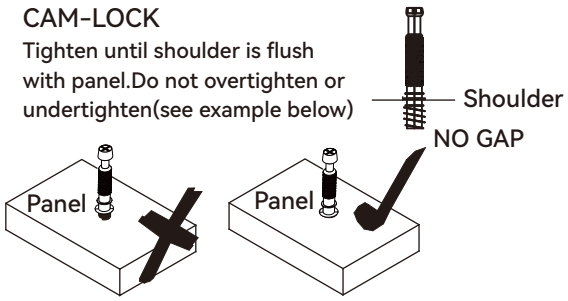

Step 22

C
Ø6*30mm x8

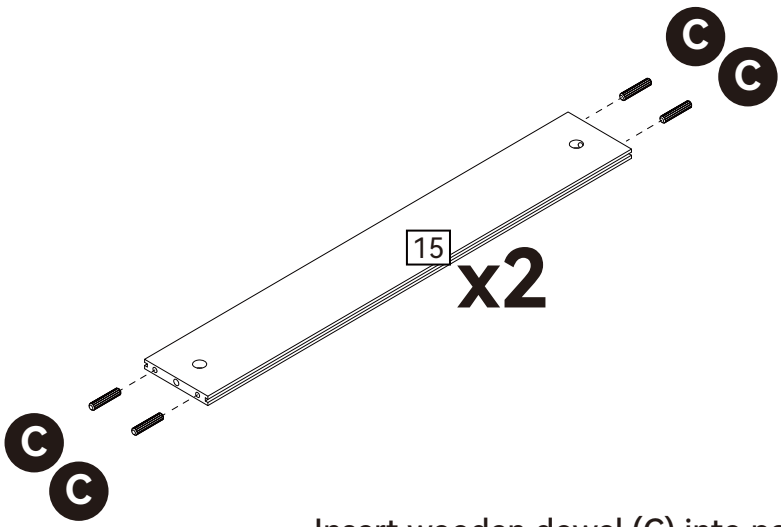


Insert wooden dowel (C) into panel (15).


Step 23

B


Ø15*9.6mm x2

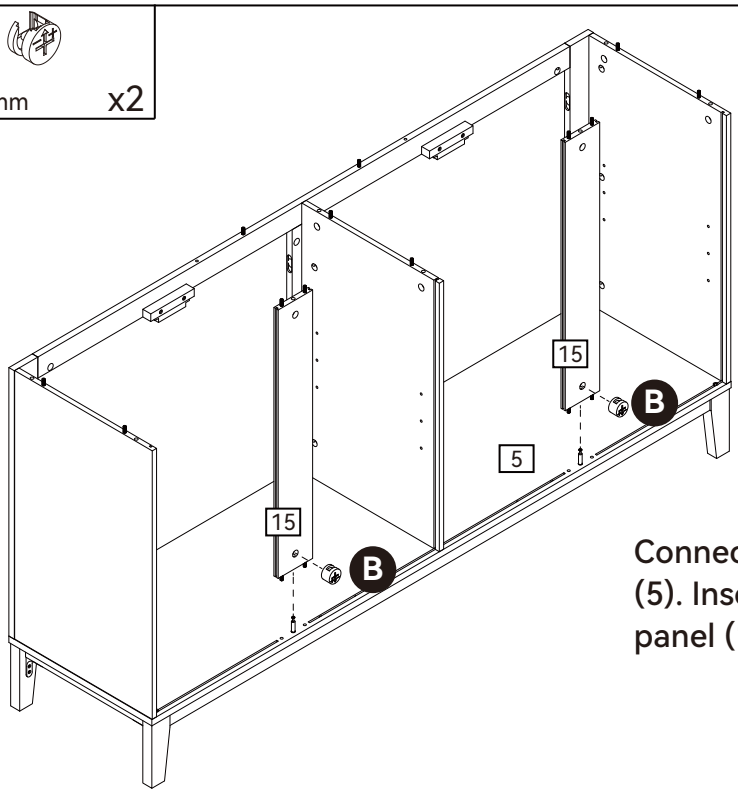

Connect panel (15) to panel (5). Insert cam lock (B) into panel (15) and tighten it.

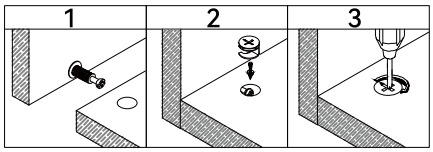

Step 24

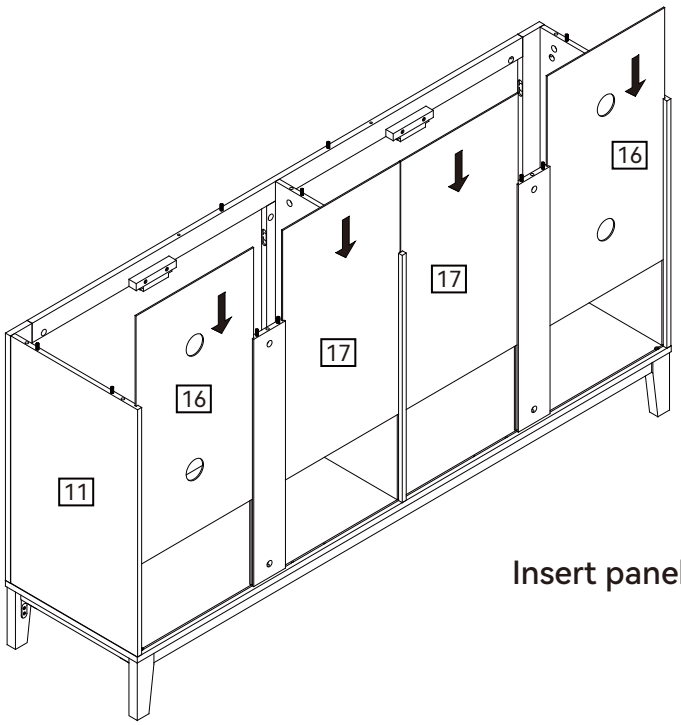

Insert panels (16) and (17) into the grooves.


Email : **service@grandtunnel.com**

Step 25

A

Ø7*43mm x8

Lock 2-in-1 connector bolt (A) into panel (18).

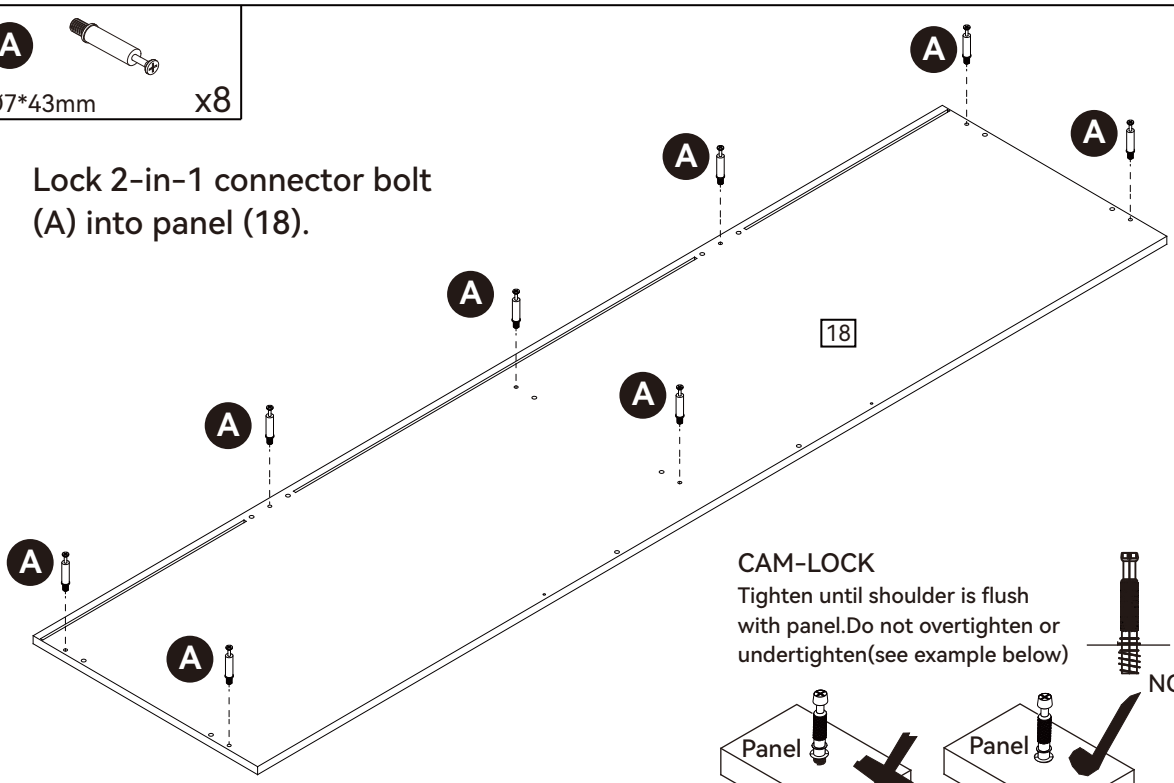

CAM-LOCK

Tighten until shoulder is flush with panel.Do not overtighten or undertighten(see example below)




Step 26


B


Ø15*9.6mm x8

Back panel groove

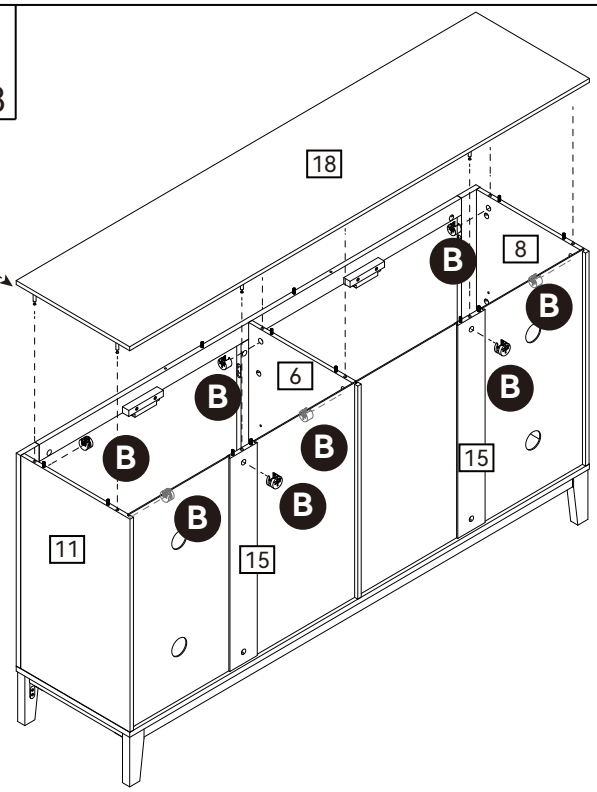

Connect panel (18) to panels (6), (8), and (11). Insert cam lock (B) into panels (6), (8), and (11) and tighten them.

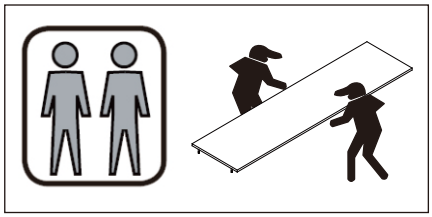

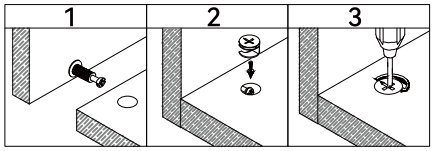


Step 27

E



Ø5*40mm x2

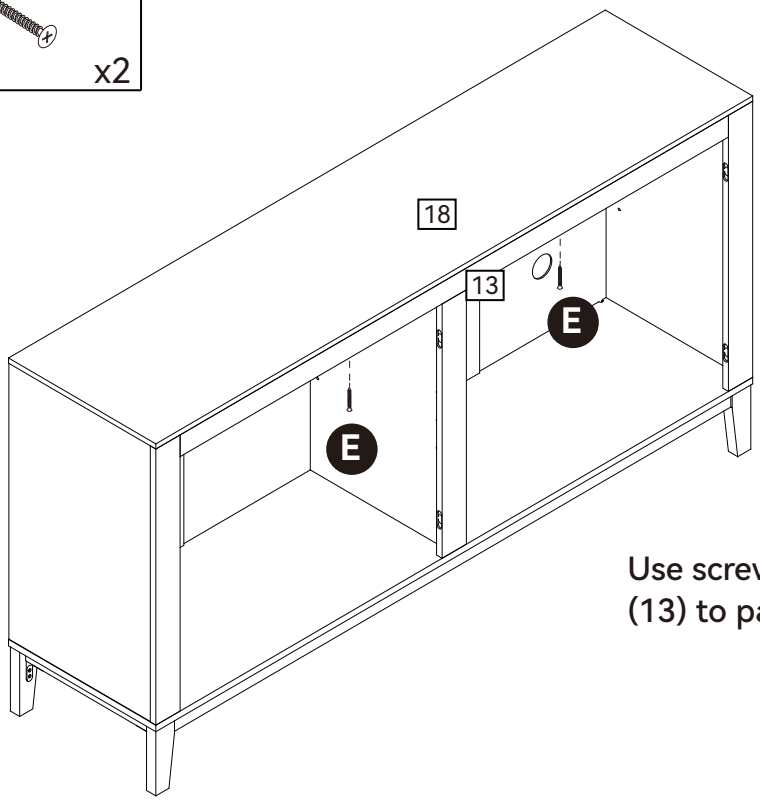


Use screw (E) to secure panel (13) to panel (18).


Step 28

I



x16

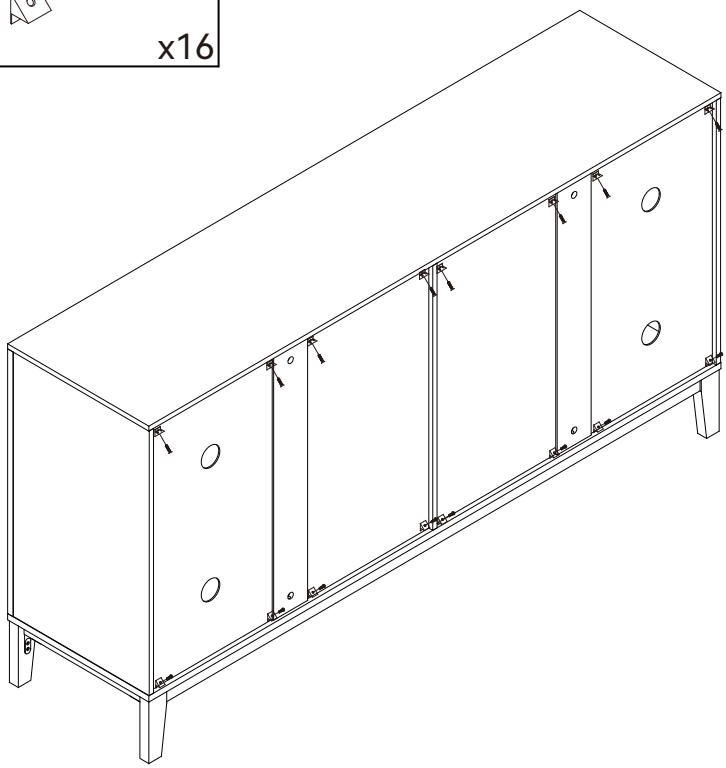




Secure the back panel with back panel clip (I).


Email : **service@grandtunnel.com**

Step 29

L x8

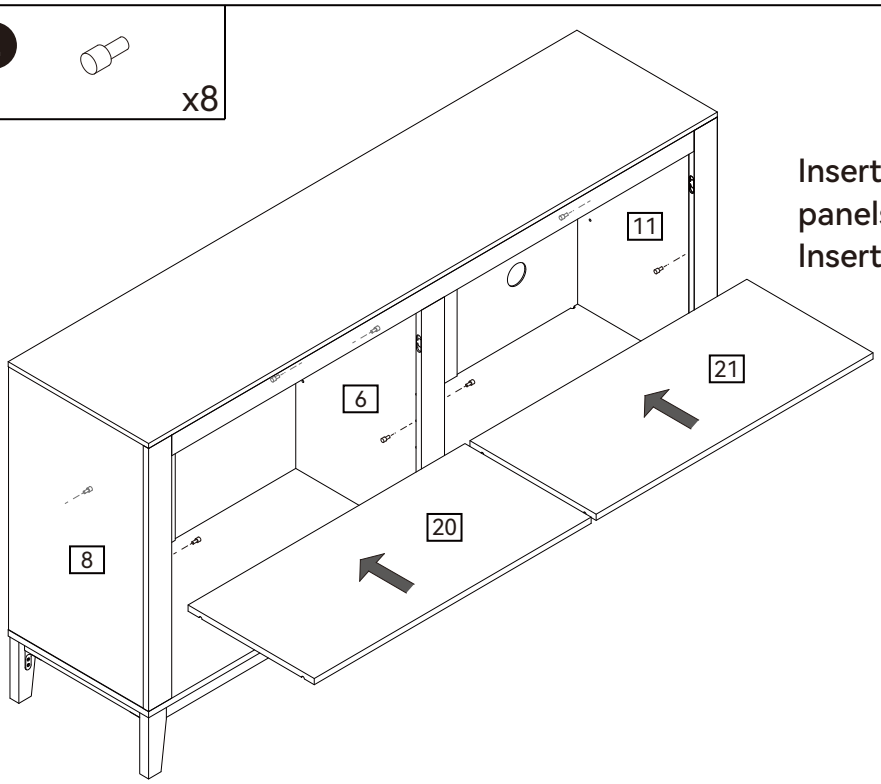


Insert shelf supports (L) into panels (6), (8), and (11).
Insert panels (20) and (21).

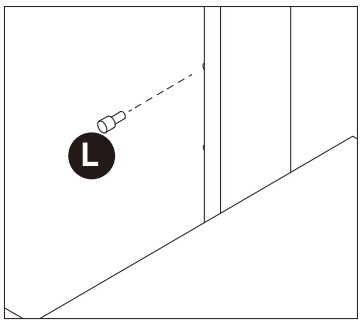


Step 30

H x8

K Ø4*20mm x16

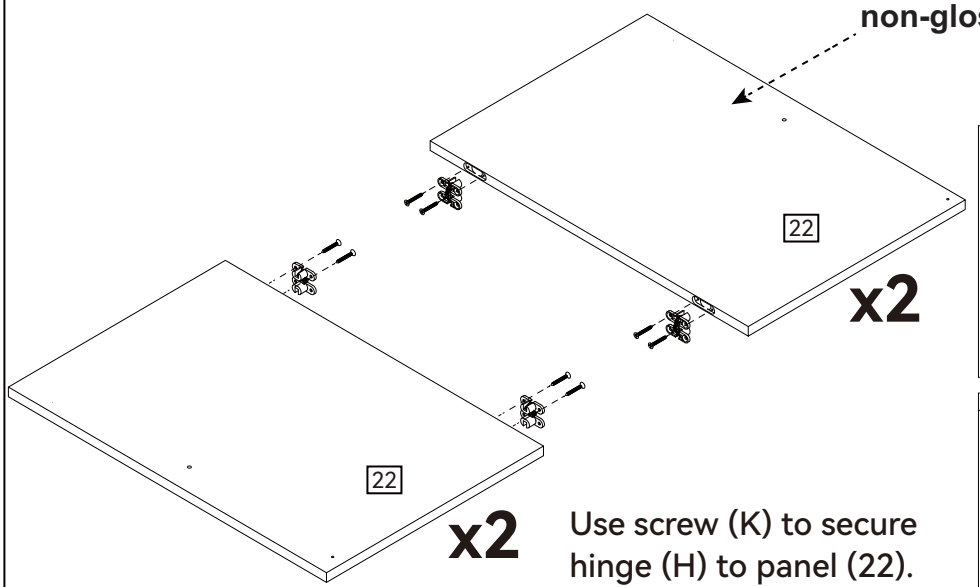


Use screw (K) to secure hinge (H) to panel (22).

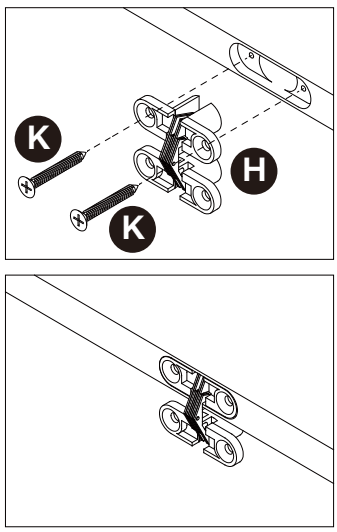

Step 31


D	J	N
3.5*12mm x4	x4	x4

Secure handle (J) to panel (22).
Use screw (D) to secure
magnetic strip (N) to panel (22).

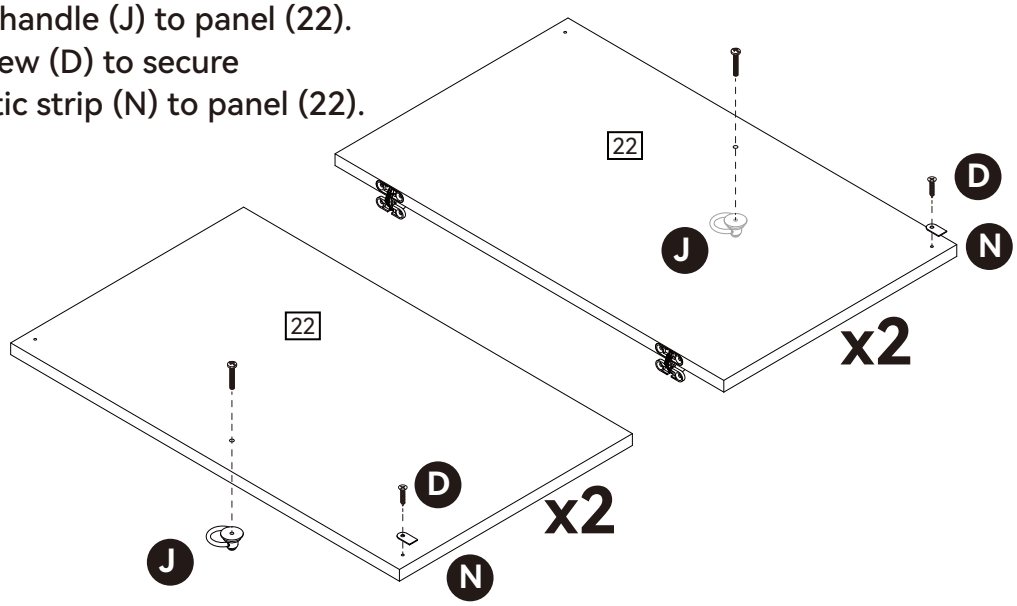


Step 32

K
Ø4*20mm x8

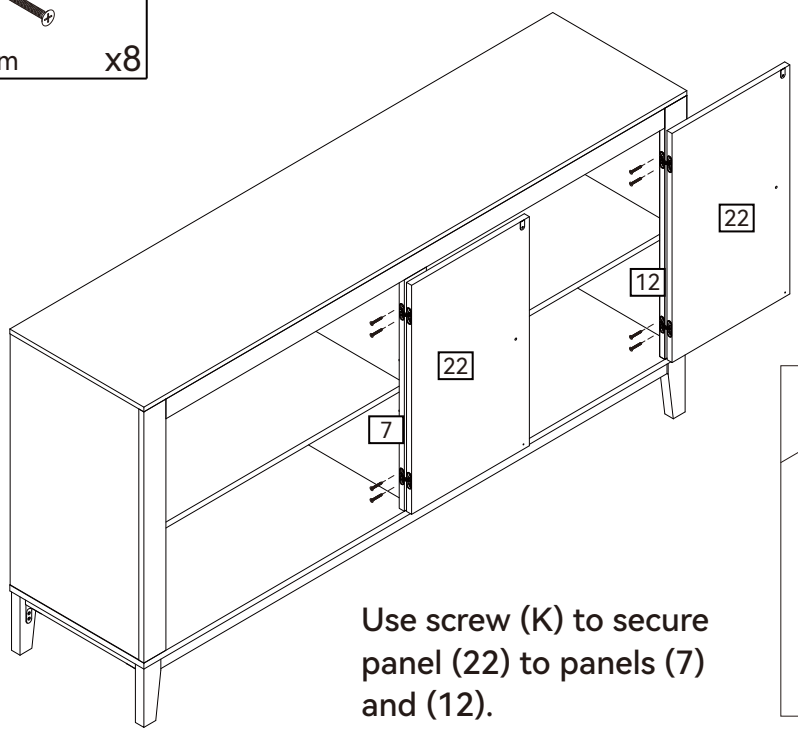

Use screw (K) to secure
panel (22) to panels (7)
and (12).

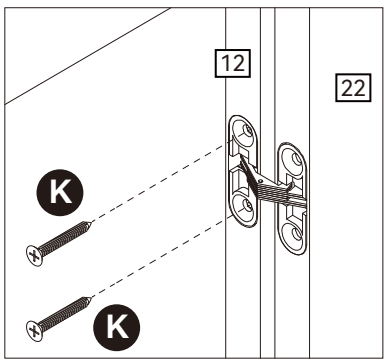


Email : **service@grandtunnel.com**

Step 33


K



Ø4*20mm x8

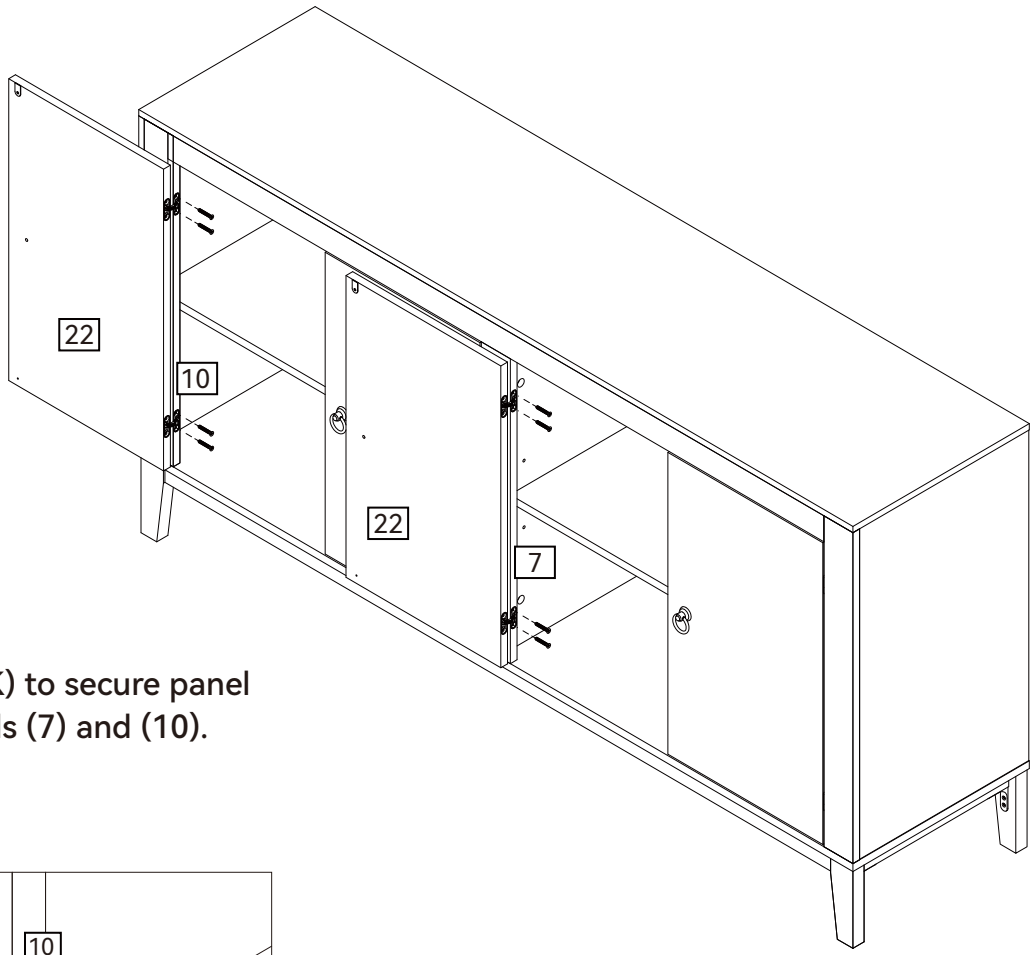


Use screw (K) to secure panel (22) to panels (7) and (10).

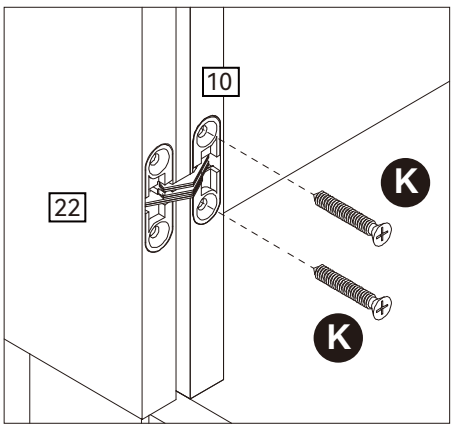


Step 34

Is your cabinet door looking crooked or unevenly spaced?

If you're still having trouble lining everything up, your next step should be to try to adjust the feet slightly to square up the cabinet and doors. Follow the instructions below:

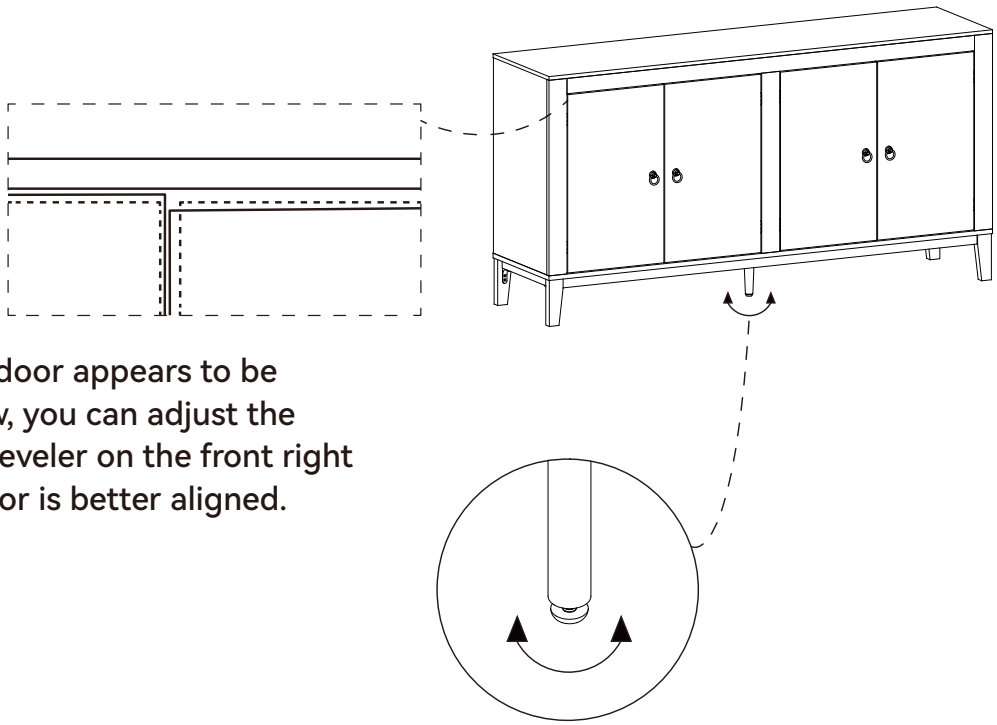

If the right door appears to be hanging low, you can adjust the adjustable leveler on the front right until the door is better aligned.

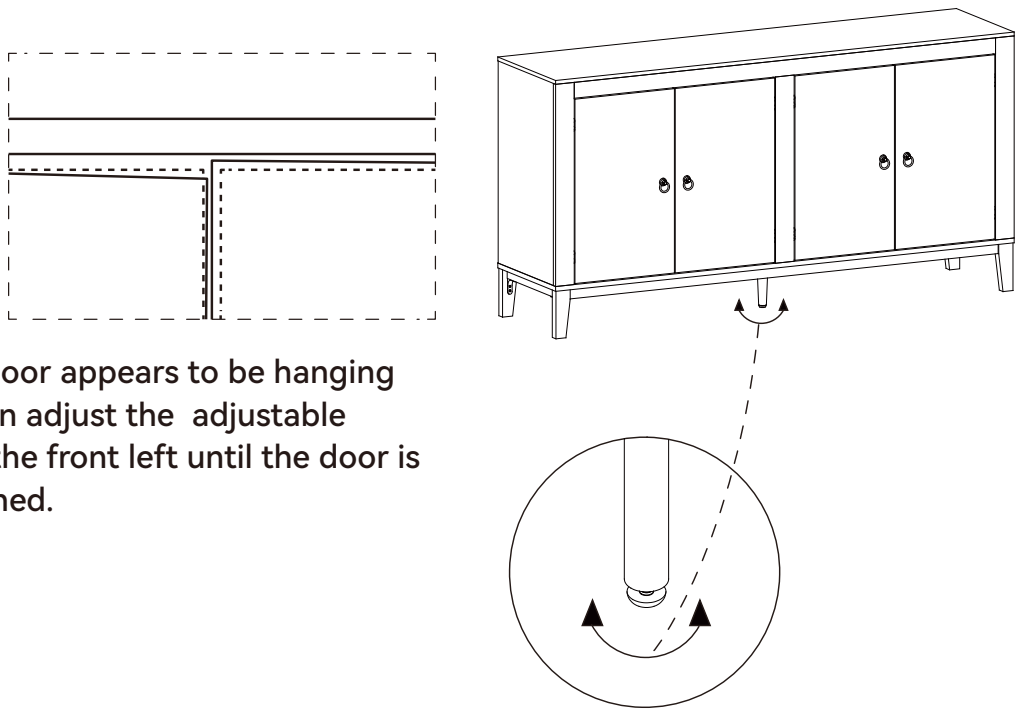

If the left door appears to be hanging low, you can adjust the adjustable leveler on the front left until the door is better aligned.

Email : **service@grandtunnel.com**


Step 35

Q  x2

The unit is floor standing, but it is recommended that the unit is secured to the wall.

1. Move the unit into desired position.

2. Mark the wall with a suitable scribe the position of the fixing holes.

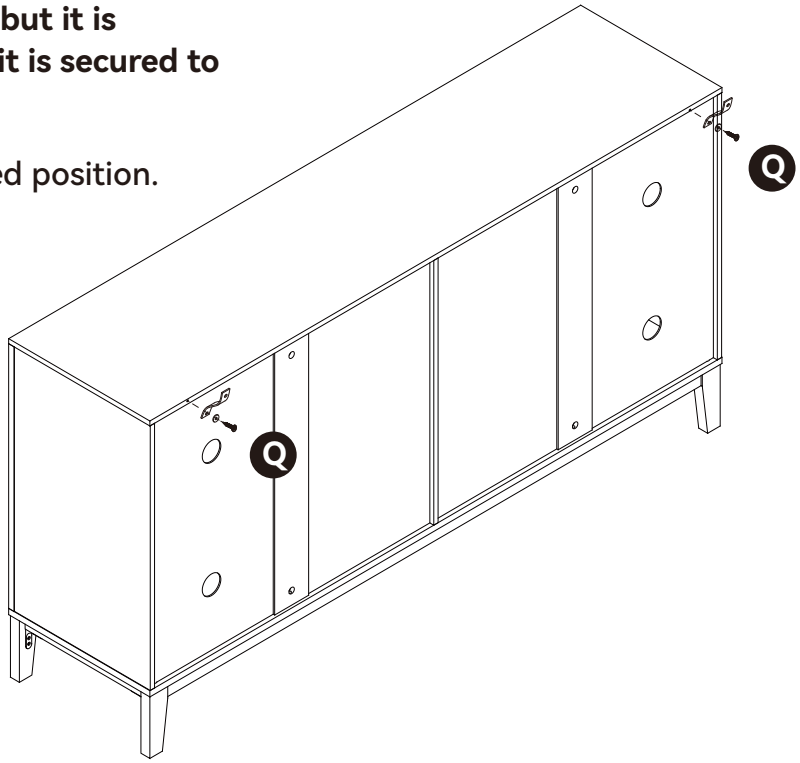


Warning:
Before drilling,check wall for hidden pipes and cables.

3. Drill holes and insert 2 x wall plug

4. Attach 2 x Wall Straps to to the top of the unit using 2 x Washers and 2 x Screws

5. Secure the straps to the wall using 2 x Washers and 2 x Screws

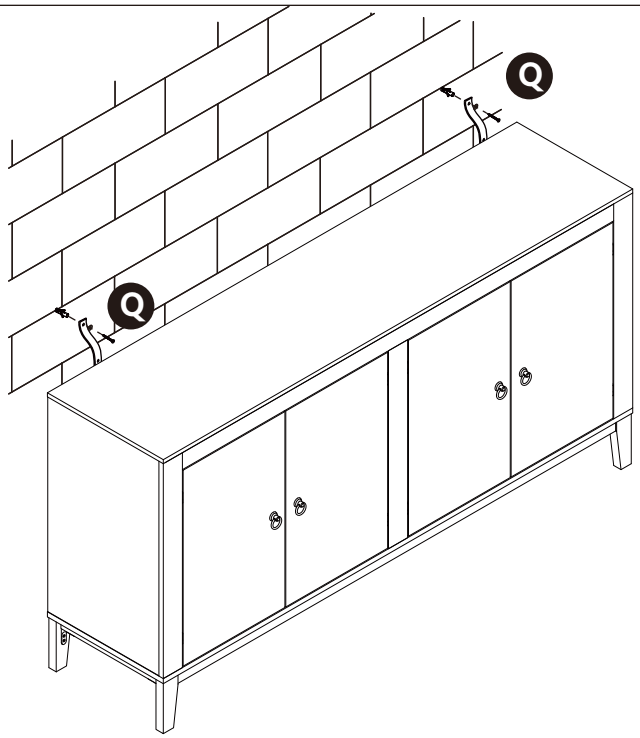

Note:
To hide the straps behind the unit, drill the holes lower than the top of the unit

A Guide to Wall Mounting & Fixings

Important Note:

- If plastic wall plugs (rawl plugs) are supplied with your product, e.g.:



- these are only suitable for use in masonry walls.
- If you are in any doubt about the correct wall plugs for your wall, seek professional advice.
- Failure of the product due to using the incorrect fixings is the responsibility of the installer.

Important : When drilling into walls always check that there are no hidden wires or pipes etc.

Make sure that the screws and wall plugs being used are suitable for supporting your unit. Consult a qualified tradesperson if you are unsure.

Hints:

1: General rule: always use a larger screw and wall plug if you are not sure.

2: Ensure you use the recommended drill bit to match the wall plug and hole size.

3: Ensure you drill the hole horizontally; do not force the drill or enlarge the hole.

4: Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.


5: Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types of walls

You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone or wood.

1. "General Purpose" wall plug


Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

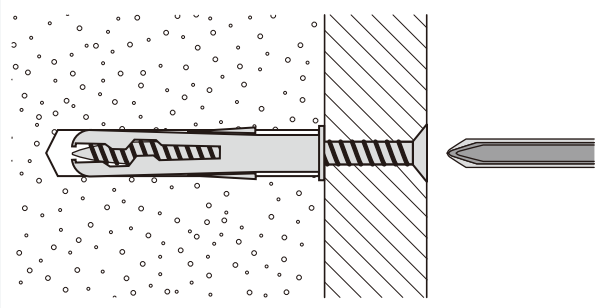

Email : **service@grandtunnel.com**


2. "Plasterboard" wall plug

For use when attaching light loads onto plasterboard partitions.

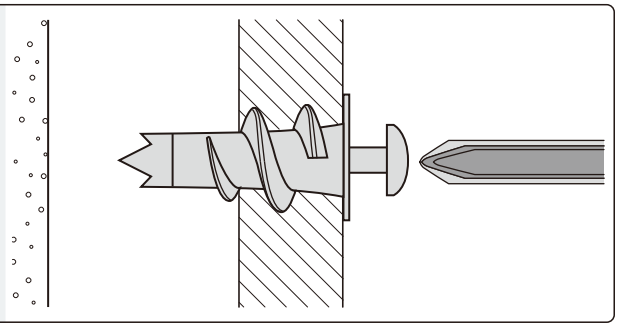


3. "Cavity Fixing" wall plug

For use with plasterboard partitions or hollow wooden doors.

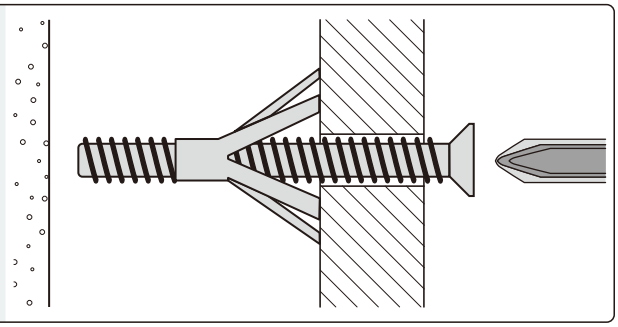


4. "Cavity Fixing – Heavy Duty" wall plug

For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.

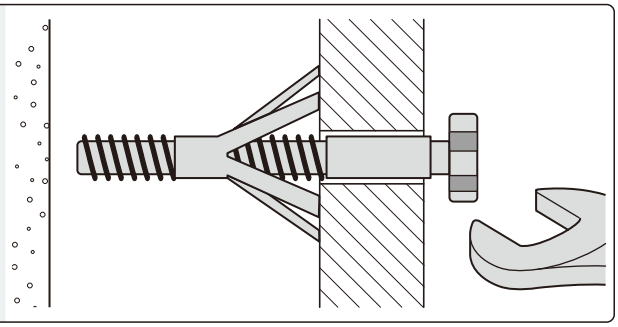


5. "Hammer Fixing" wall plug

For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

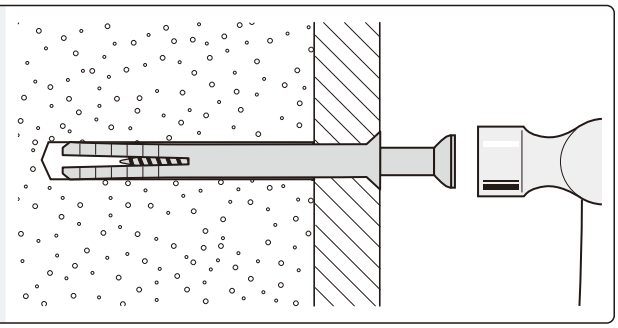

6. "Shield Anchor" wall plug – heavy loads

For use with heavier loads such as TV and HiFi speakers and satellite dishes etc.

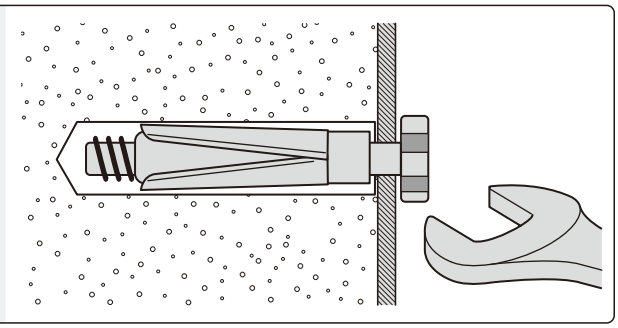

Care & Maintenance

Safety: always check the fitting and location to ensure your safety in and around the home.

Fitting: from time to time check the fitting to ensure the wall plugs or screws do not become loose.

Sideboards

SKU
C002434010
C002434020
C002434030

V1.0