


END TABLE

Assembly Instructions - Please keep for future reference

1061030102A

1061030105A

1061030106A

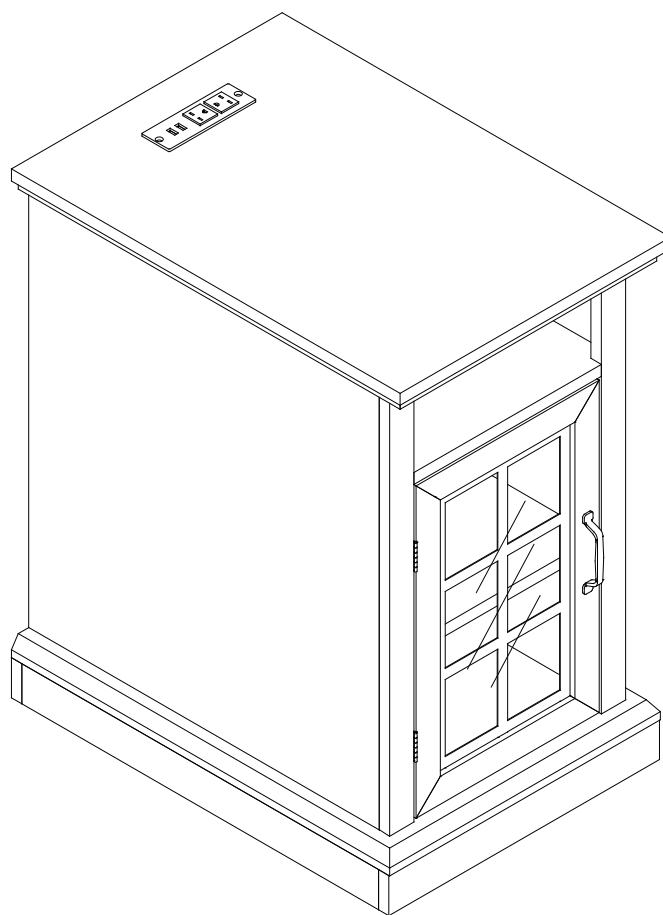

Dimensions

Width - 25inch

Depth - 22inch

Height - 26inch

Important – Please read these instructions fully before starting assembly

Issue 1 - 22/03/2023



Safety and Care Advice

Important – Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on the following pages.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.

- During assembly do not stand or put weight on the product, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.



- To reduce the likelihood of damaging your product please ensure that your power drill is set on a low torque setting.

Care and maintenance


- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- This product should not be discarded with household waste. Take to your local authority waste disposal centre.

Handy Hints


- Assemble all parts and bolts loosely during assembly, only once the product is complete should you fully tighten the bolts
- Regularly check and ensure that all bolts and fittings are tightened properly.

Components - Panels


Please check you have all the panels listed below

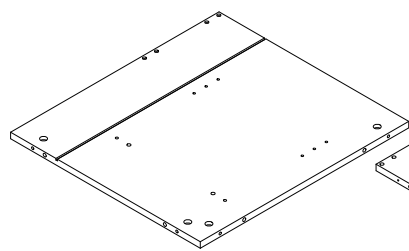


1 (50.3x 55.5x 1.5cm) x1

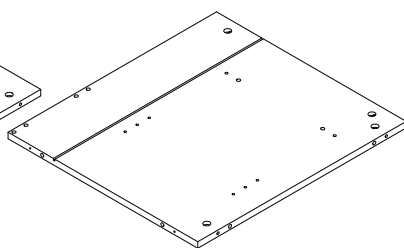


2 (50.3x 55.5x 1.5cm) x1




3 (31.1 x 39.5 x 1.5cm) x1




4 (5 x 31.1 x 1.5cm) x1




5 (5 x 31.1 x 1.5cm) x1




6 (3.5 x 55.5 x 1.5cm) x1




7 (3.5 x 55.5 x 1.5cm) x1




8 (5 x 38.8 x 1.5cm) x1




9 (5 x 38.8 x 1.5cm) x1



10 (5 x 51.3 x 1.5cm) x1




11 (5 x 51.3 x 1.5cm) x1

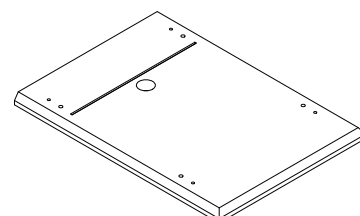


12 (39 x 54.5 x 2.4cm) x1




13 (31.9 x 56.3 x 0.27cm) x1

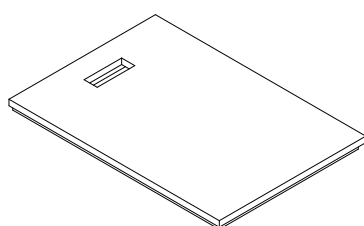

14 (39 x 56 x 3cm) x1



15 (31 x 37.5 x 1.2cm) x1















16 (26.7 x 41.4 x 1.5cm) x1

Components - Fittings

Please check you have all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.


A  Cam Bolt x 24	B  Cam Lock x 24	C  Wooden Dowel x 32
D  3.5*14mm Screw x 15	E  Shelf Support Pin x 4	F  5*50mm Screw x 4
G  Door Stopper x 1	H  Metal Plate x 1	I  Recessed Power Strip x 1
J  Handle & Fixings x 1	K  Hinge x 2	L  Protective Feet x 4

Tools required



Phillips screwdriver
(medium & large)

Ruler - Use this ruler to help correctly identify the screws




The screws length is measured from the head to the point (30mm screw shown).

Step 1

Connect the male camlock as directed in the assembly instructions using a screwdriver.

1


DO NOT OVER TIGHTEN.
NE PAS SERRER EXCESSIVEMENT.



Step 2

Push the male camlock into the entry hole.

2

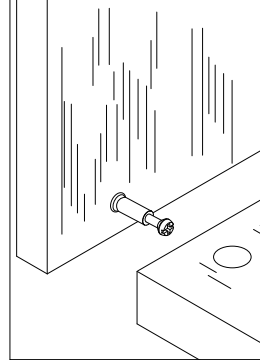


Step 3

Insert the female camlock as shown in the instructions.

Note: ensure that the arrow on the top of the camlock points towards the entry hole for the male camlock.

3

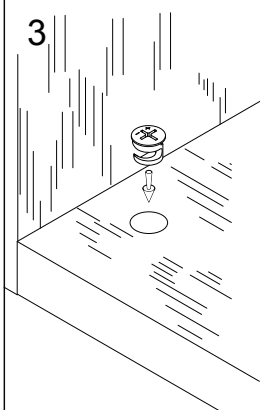


Step 4

Turn the female camlock clockwise with a screwdriver.


You should feel a click when the camlock is locked in place.

The joint is now secure.

4

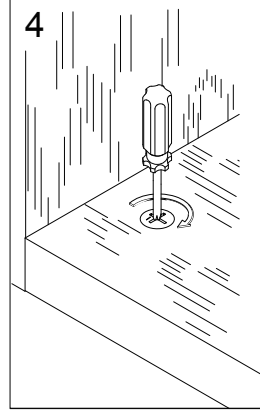

Assembly Instructions

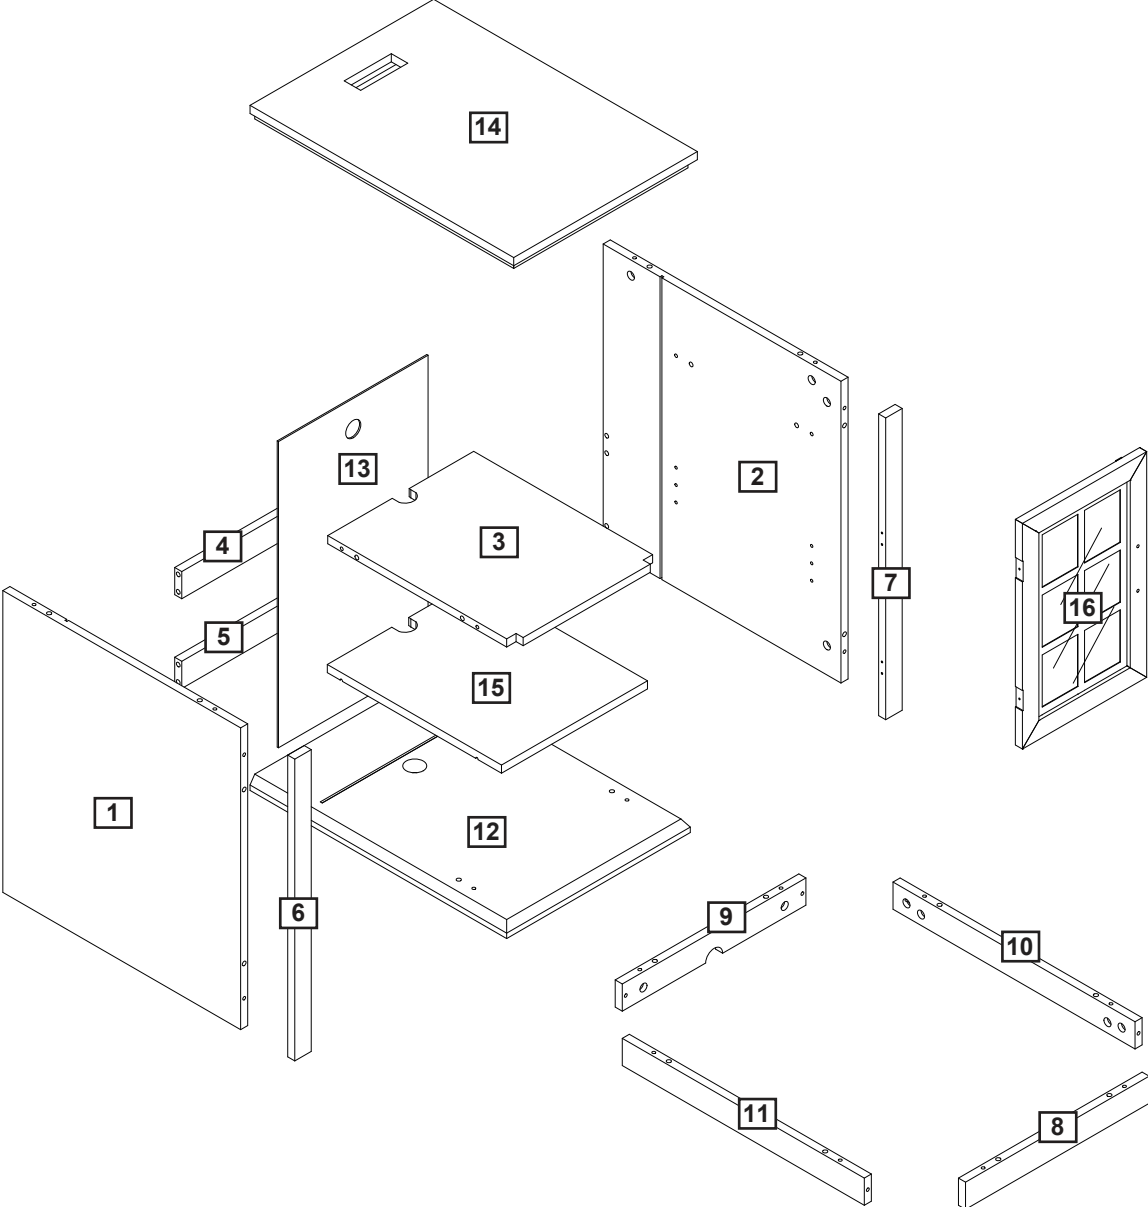


Assembly Instructions

Step 1


CAM-LOCK

Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example below)

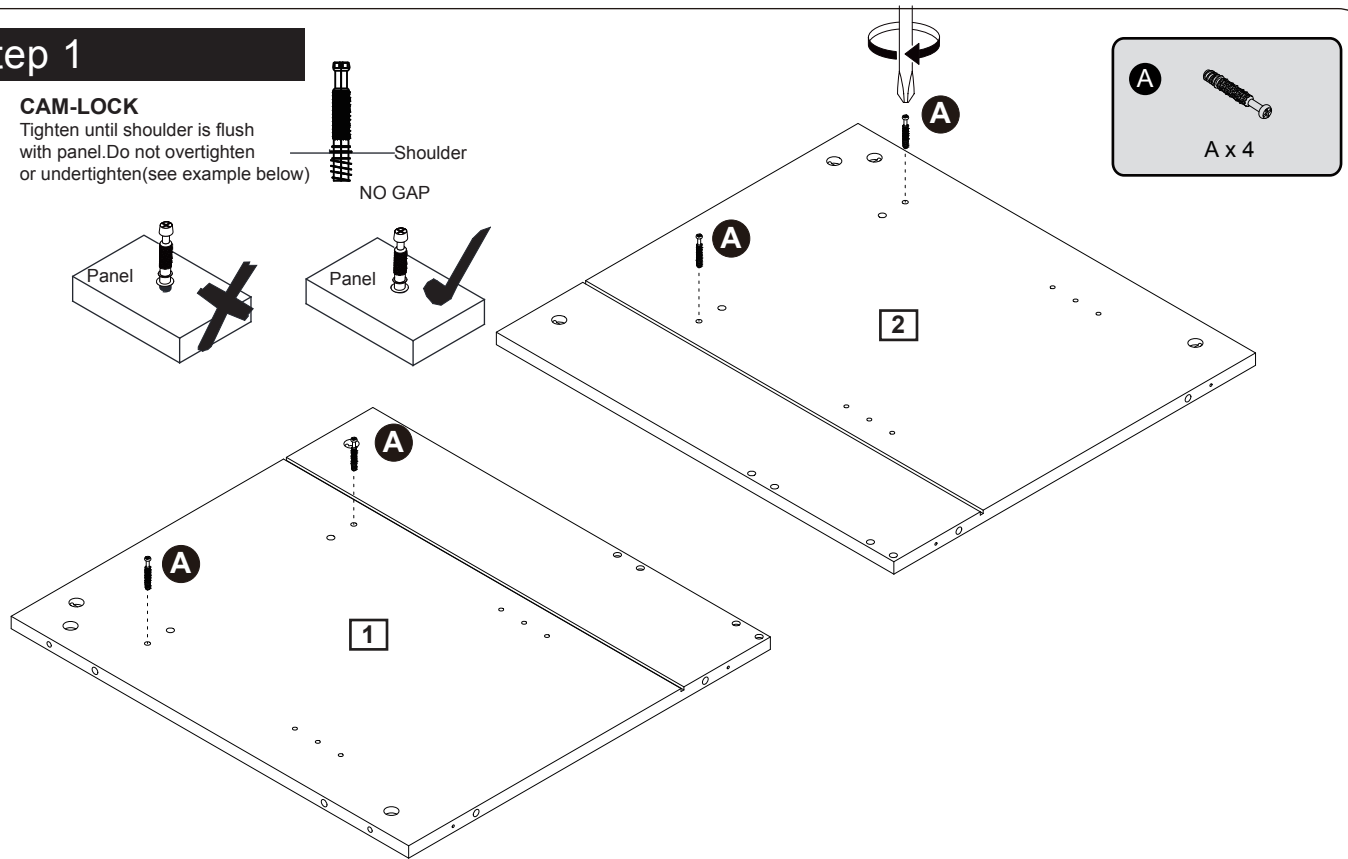

Attach cam bolt (A) to part (1,2) with a screwdriver.

Step 2

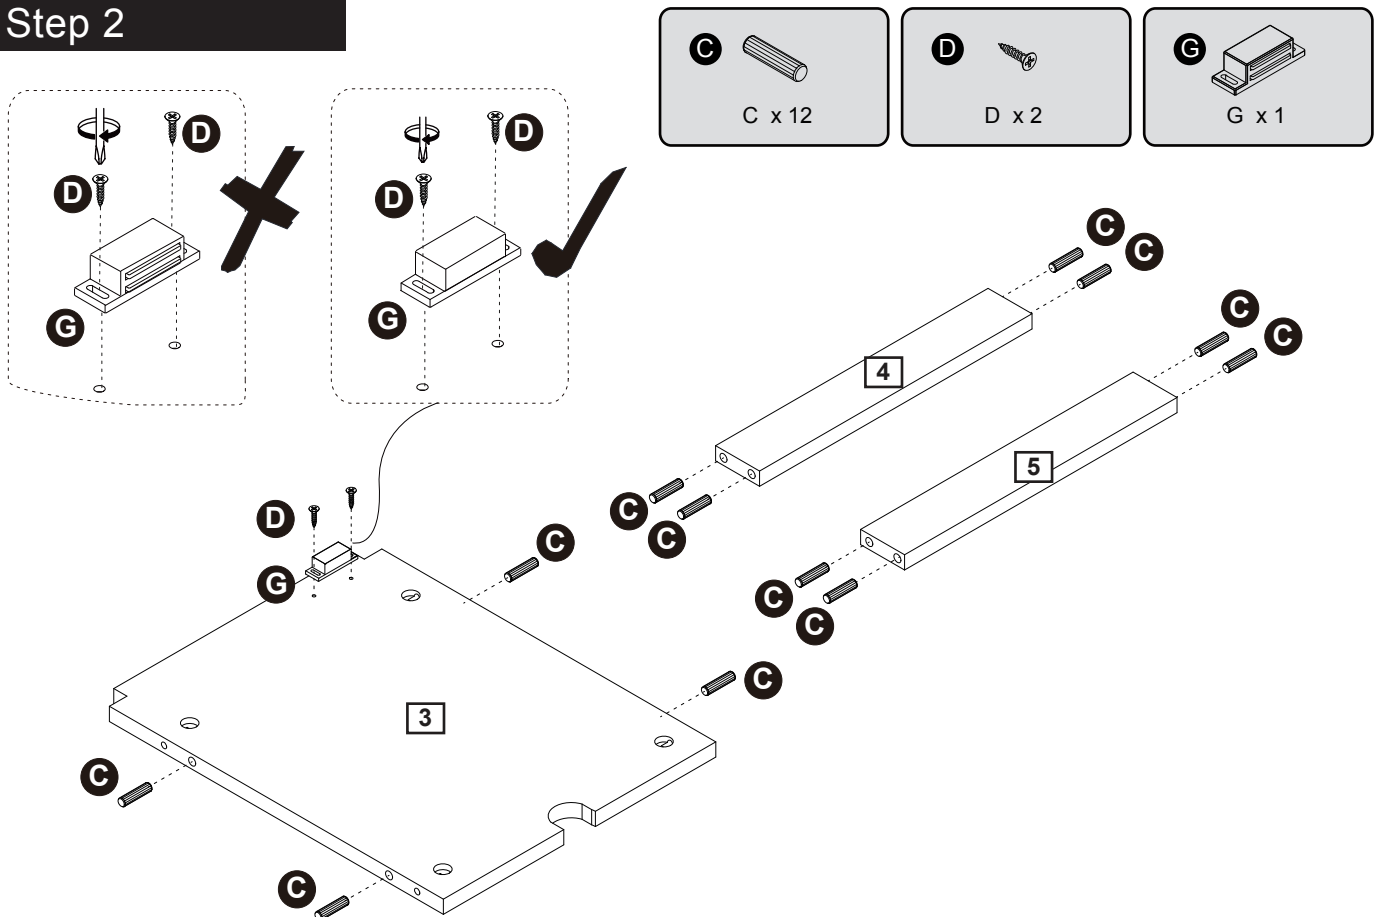


Insert wooden dowel (C) into part (3, 4, 5).

Attach door stopper (G) to part (3) using screw (D) with a screwdriver.


Assembly Instructions

Step 3

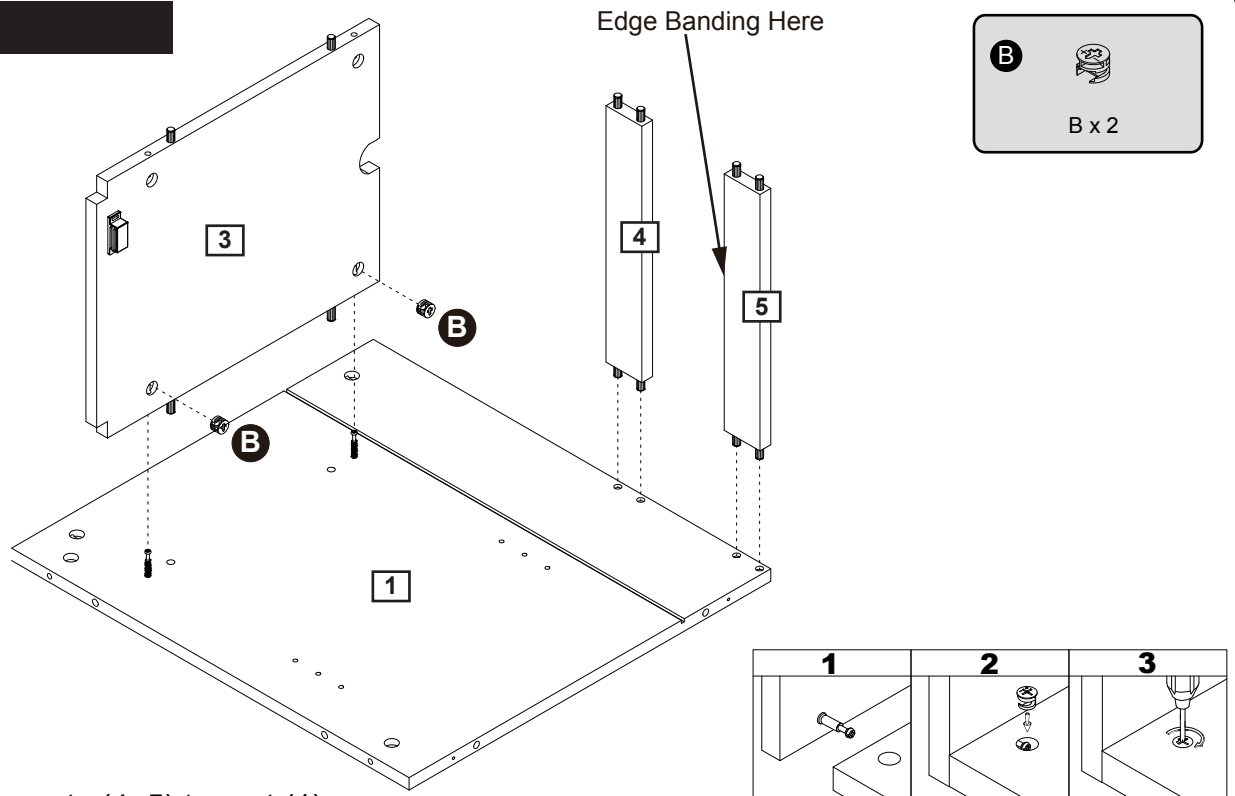

Attach parts (4, 5) to part (1).
Attach part (3) to part (1), then insert and secure cam lock (B) to part (3) to lock it.



Step 4

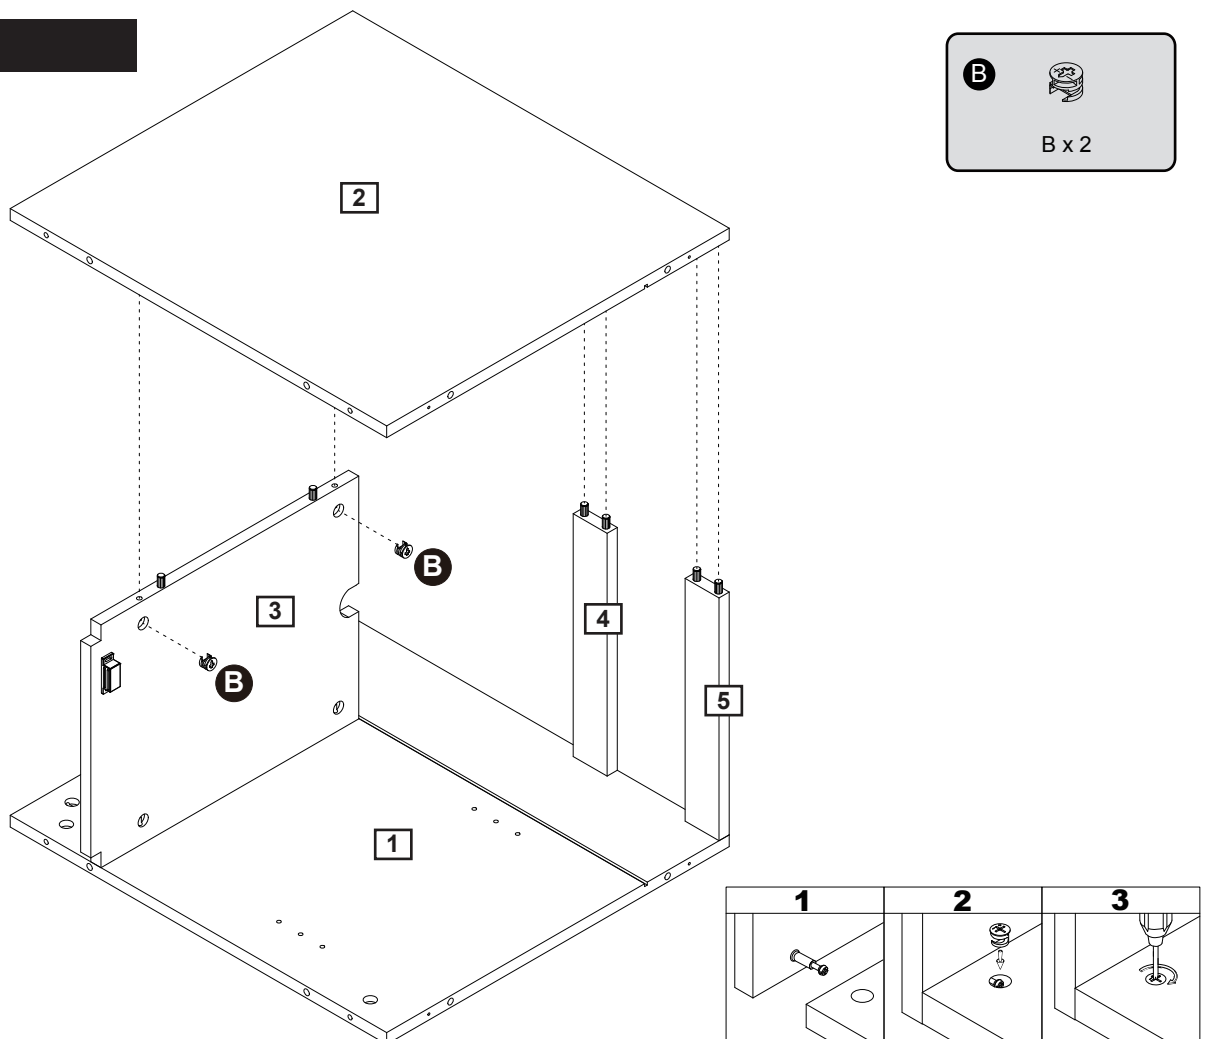

Attach part (2) to part (3, 4, 5), then insert and secure cam lock (B) to part (3) to lock it.

Assembly Instructions

Step 5




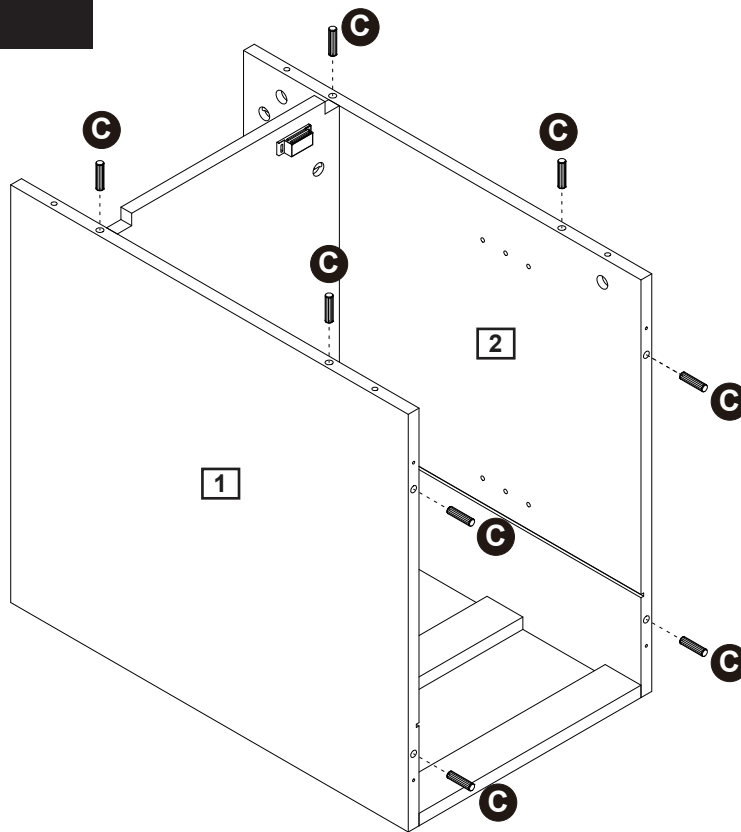


Insert wooden dowel (C) into part (1, 2).

Step 6

CAM-LOCK


Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example below)

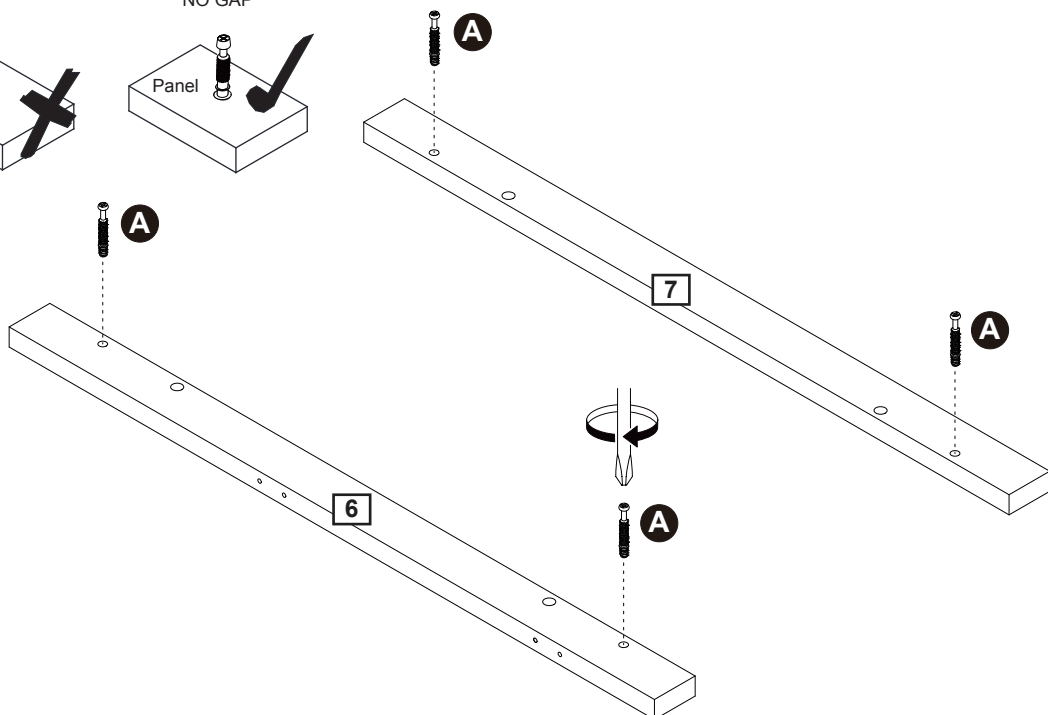

Attach cam bolt (A) to part (6, 7) with a screwdriver.

Assembly Instructions

Step 7




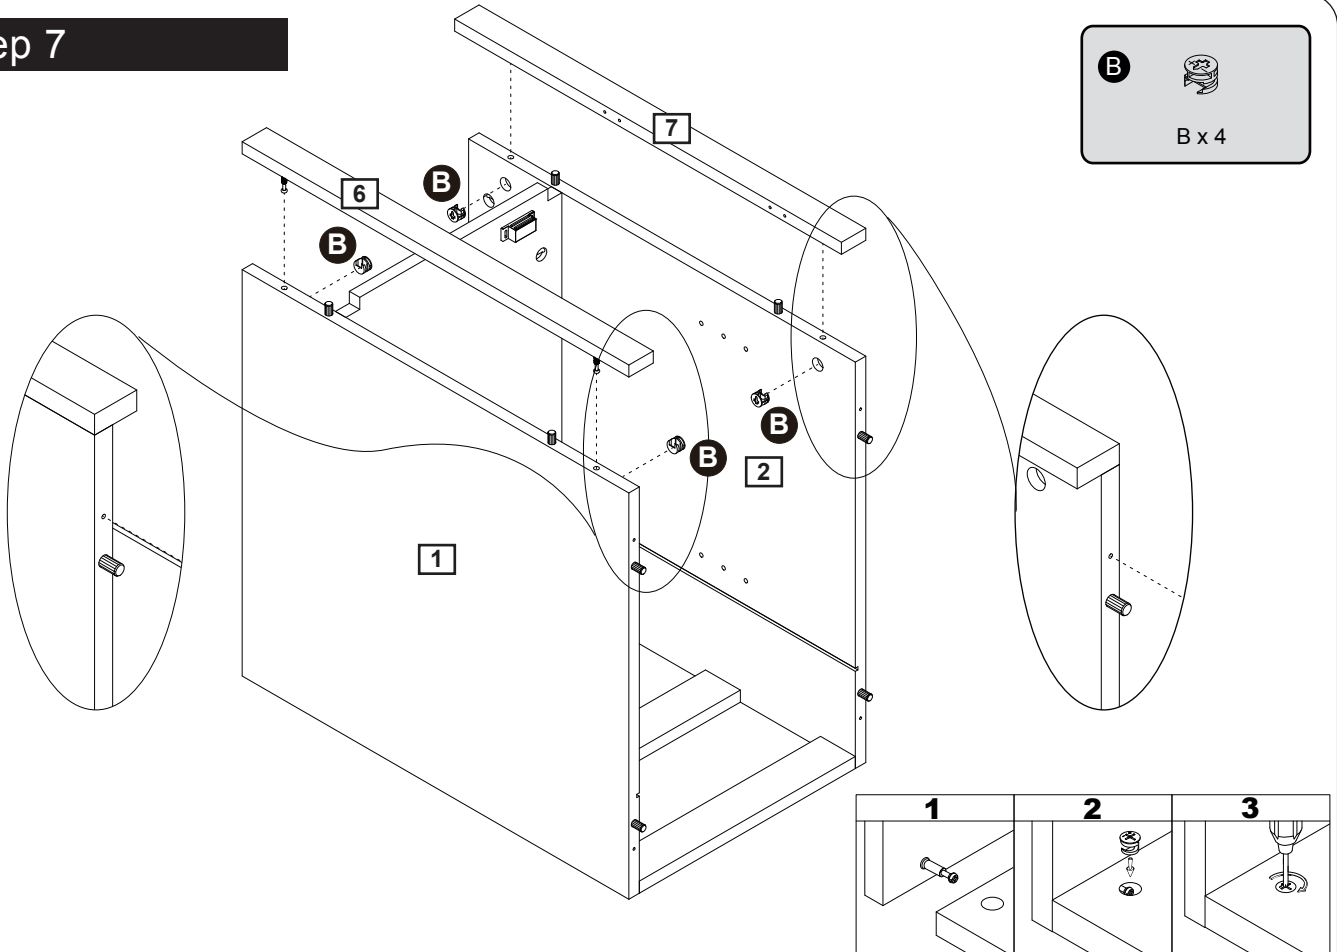


Attach part (6) to part (1), and part (7) to part (2), then insert and secure cam lock (B) to part (1, 2) to lock them.

Step 8

CAM-LOCK

Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example below)

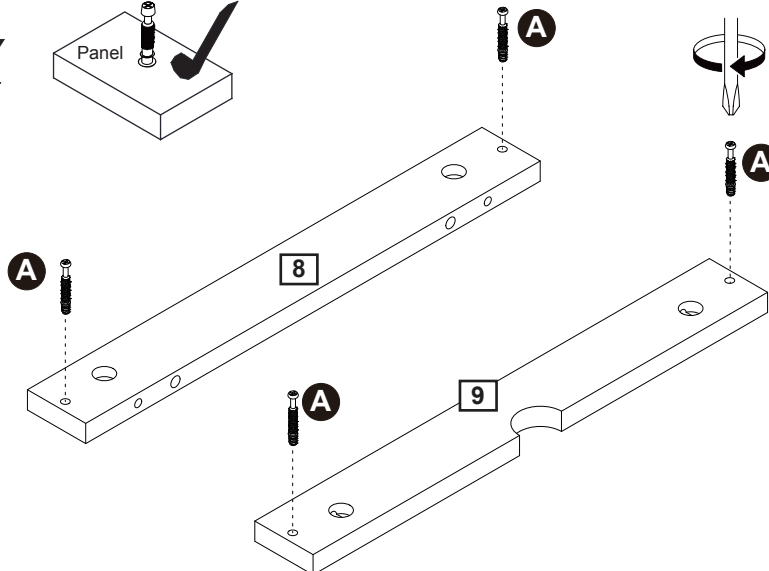

Attach cam bolt (A) to part (8, 9) with a screwdriver.

Assembly Instructions

Step 9

hole on this side

8

hole on this side

11

B

B

hole on this side

10

B

B


9

hole on this side

B



B x 4

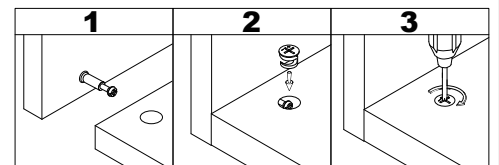


Attach part (8, 9) to part (10, 11), then insert and secure cam lock (B) to part (10, 11) to lock them.

Step 10

C



C x 8

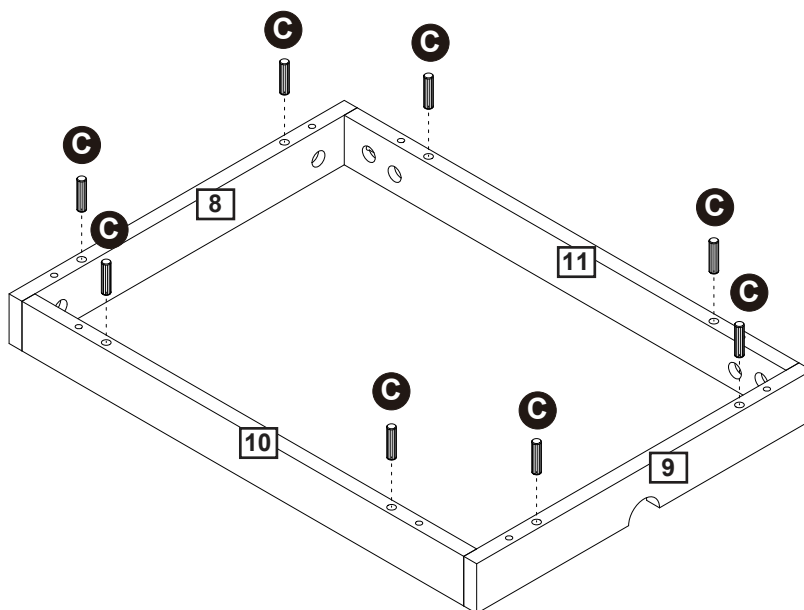





Insert wooden dowel (C) into part (8, 9, 10, 11).

Assembly Instructions

Step 11



CAM-LOCK

Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example below)

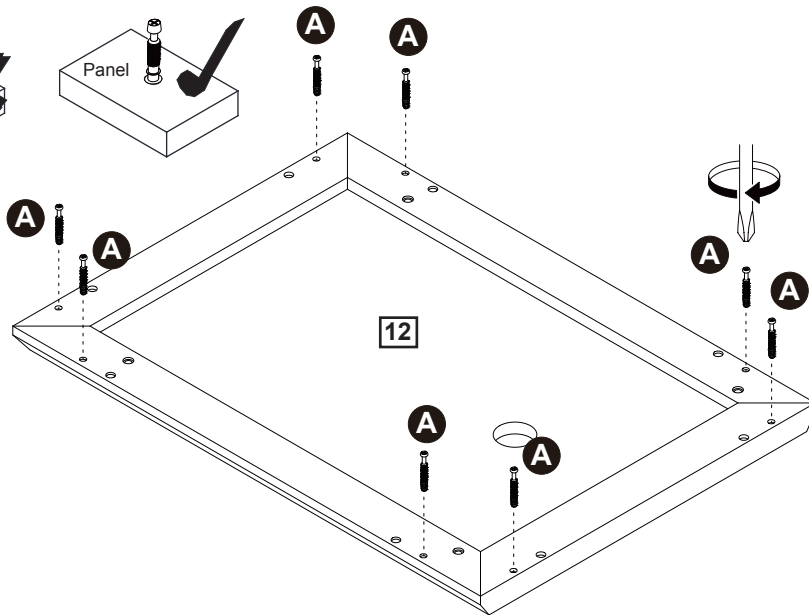

Attach cam bolt (A) to bottom panel (12) with a screwdriver.


Step 12

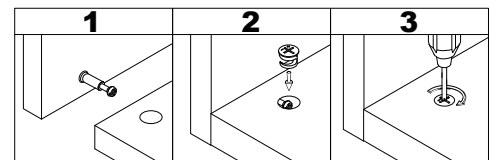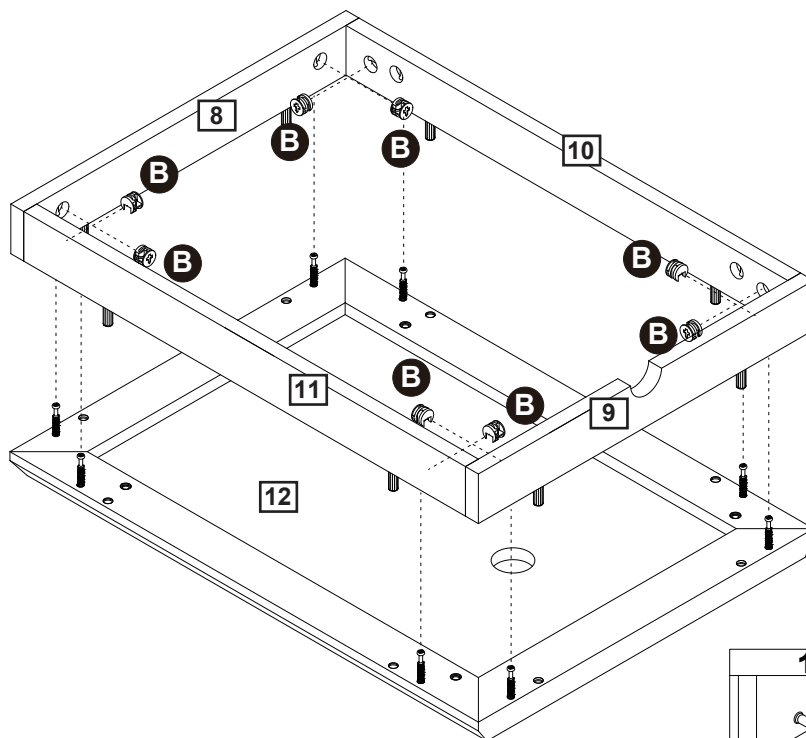

Attach part (8, 9, 10, 11) to part (12), then insert and secure cam lock (B) to part (8, 9, 10, 11) to lock them.


Assembly Instructions

Step 13

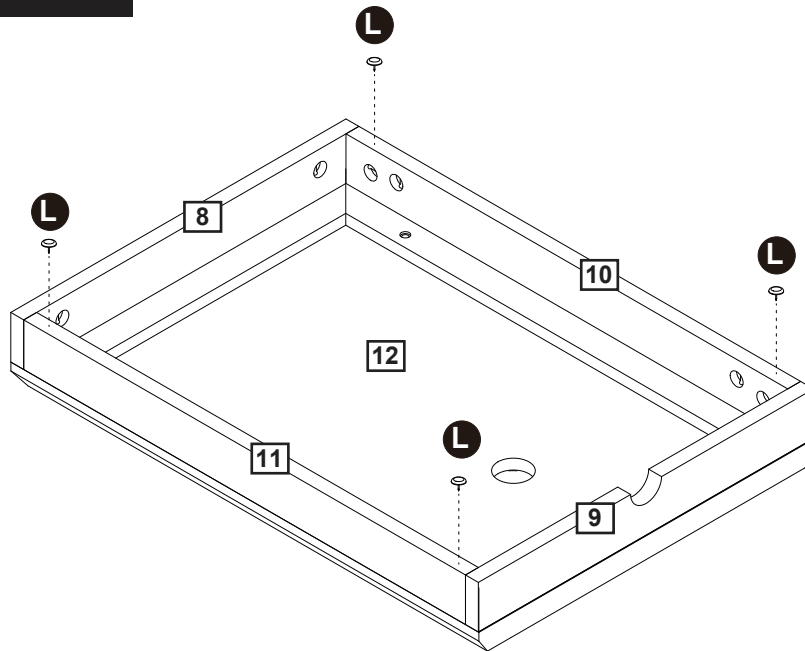

Insert protective feet (L) into part (10, 11).


Step 14

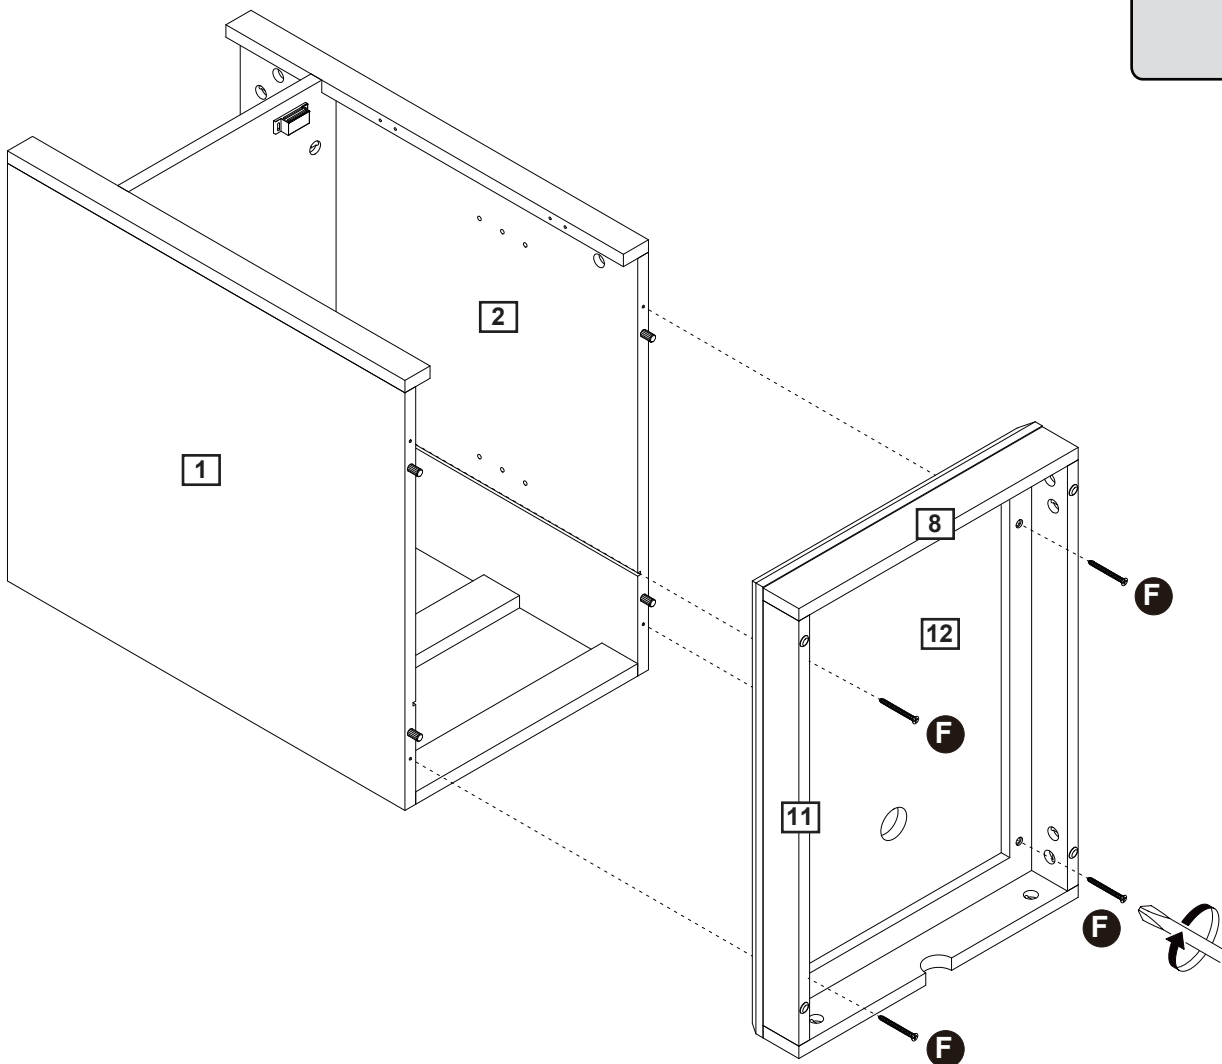

Attach bottom panel (12) to panel (1, 2) using screw (F) with a screwdriver.



Assembly Instructions

Step 15

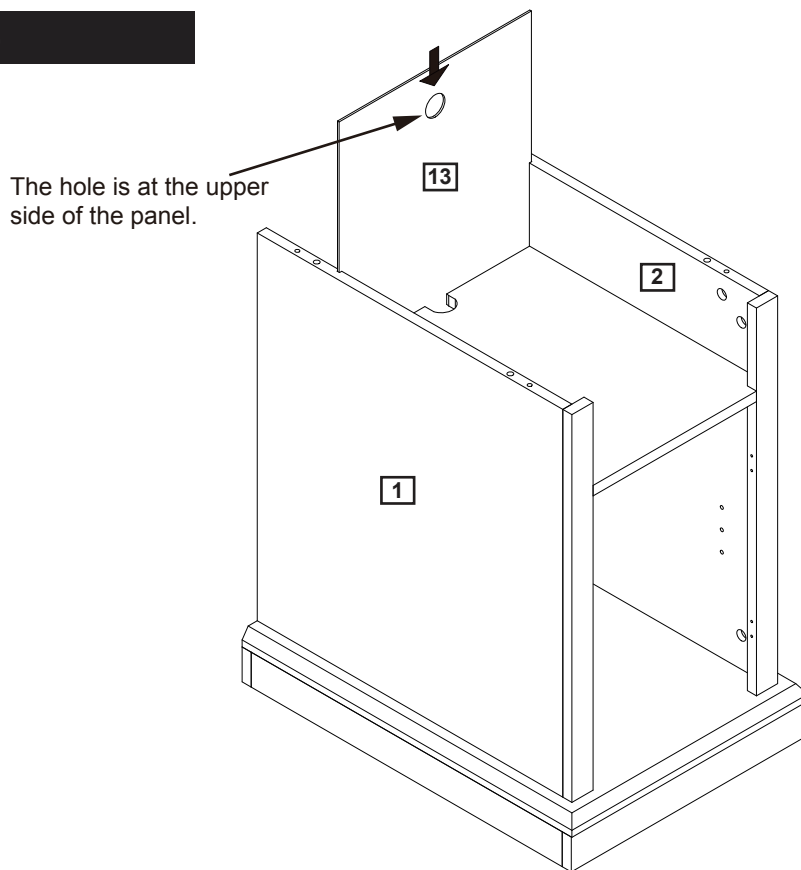

Slide the back panel (13) into grooves as per diagram.

Step 16

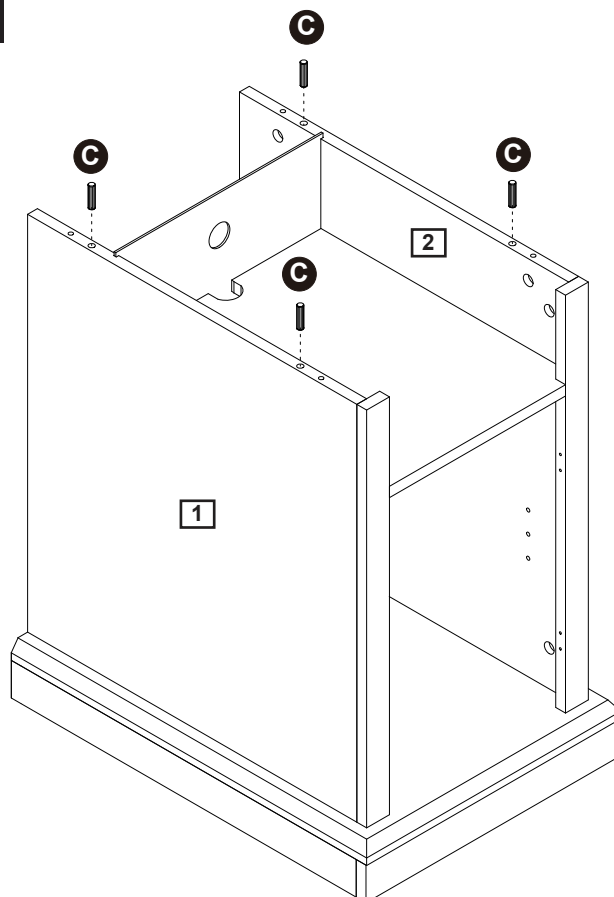






Insert wooden dowel (C) into part (1, 2).

Assembly Instructions

Step 17



CAM-LOCK

Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example below)

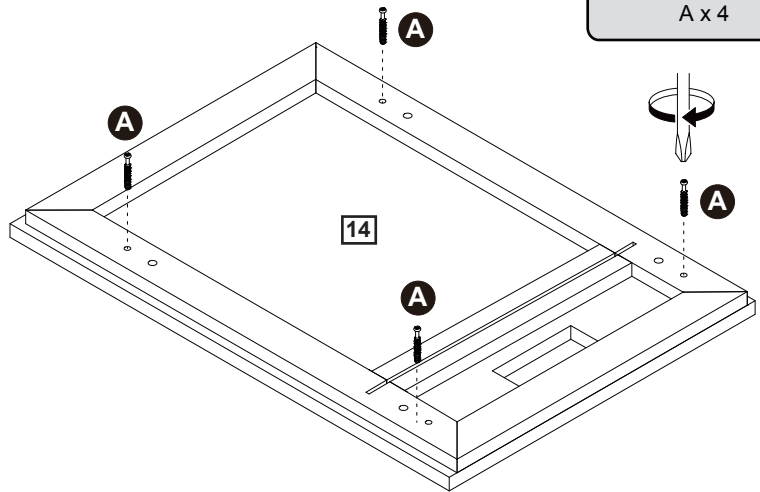

Attach cam bolt (A) to top panel (14) with a screwdriver.


Step 18

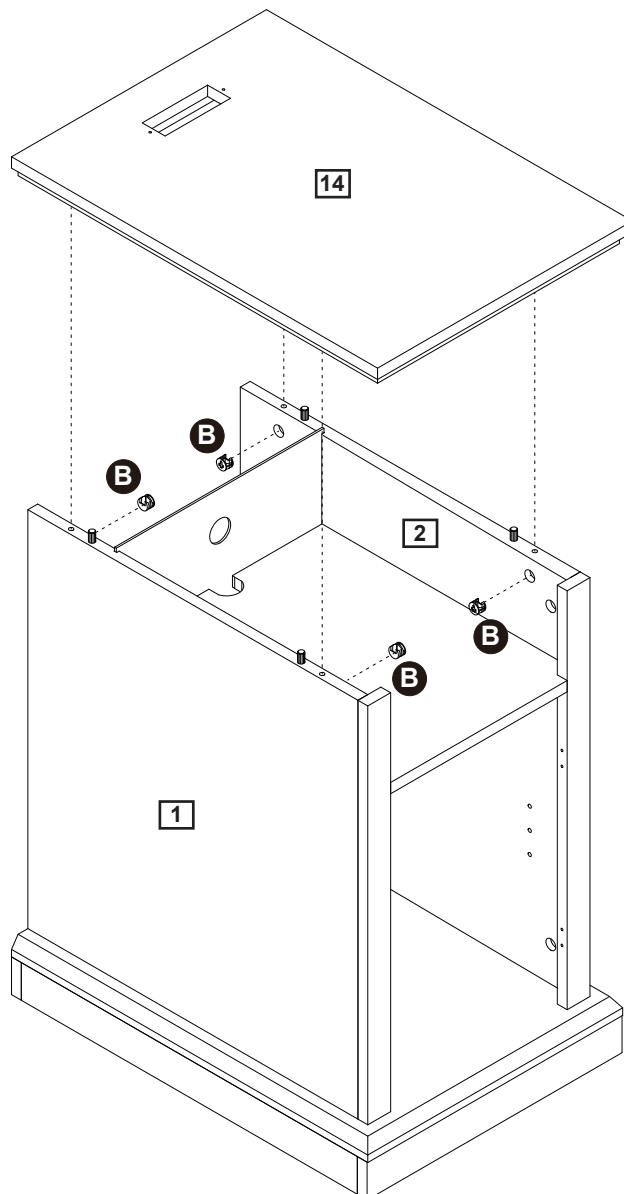

Attach part (14) to part (1, 2), then insert and secure cam lock (B) to part (1, 2) to lock it.




Assembly Instructions

Step 19

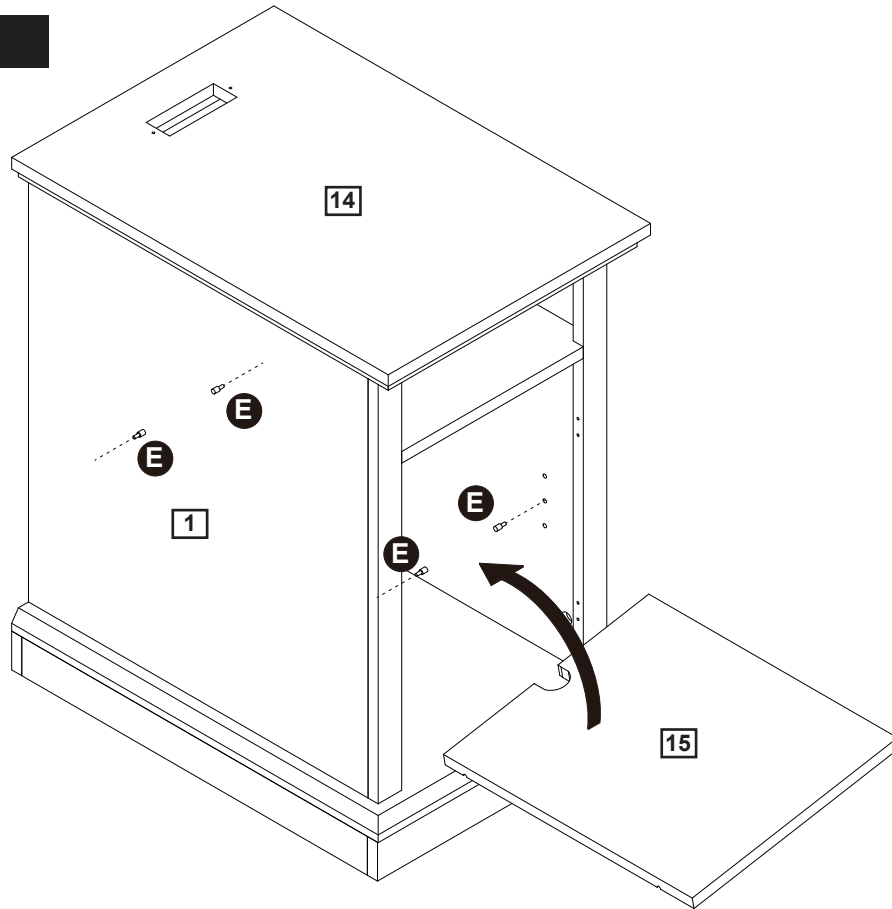

Insert shelf support pins (E) into part (1, 2), and then place adjustable shelves (15) on the top of support pins.



Step 20



open to the left

or



open to the right

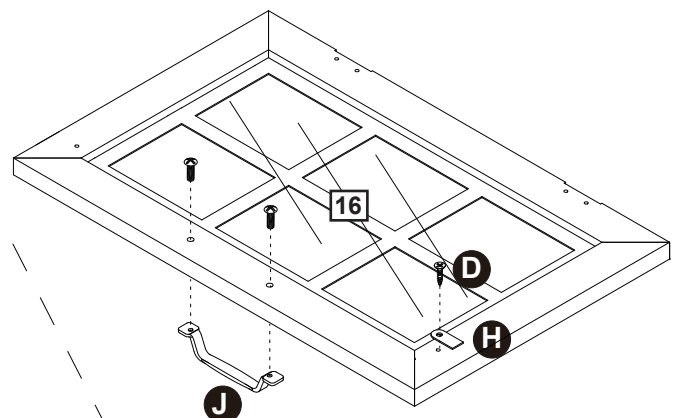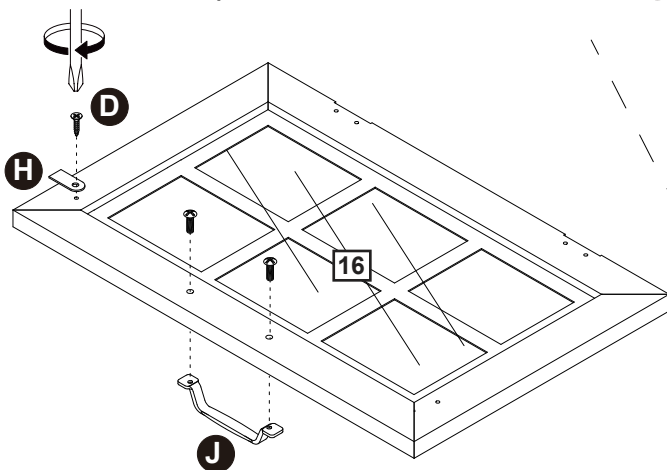


Use screw (D) to secure metal plate (H) to door (16) with a screwdriver.
Please note: you may choose to have the door open to the left or to the right.

Assembly Instructions

Step 21



or

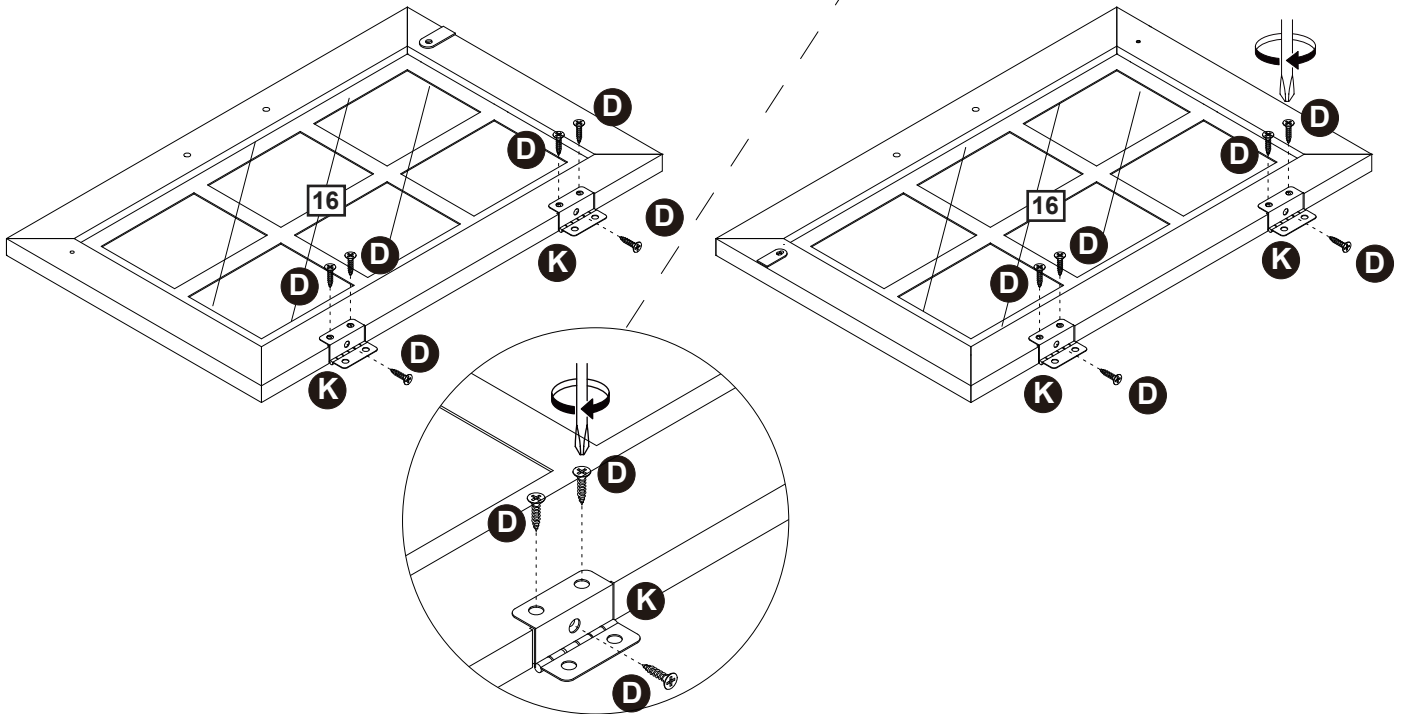

Use screw (D) to secure hinge (K) to door (16) with a screwdriver.


Step 22



open to the left

open to the right




or

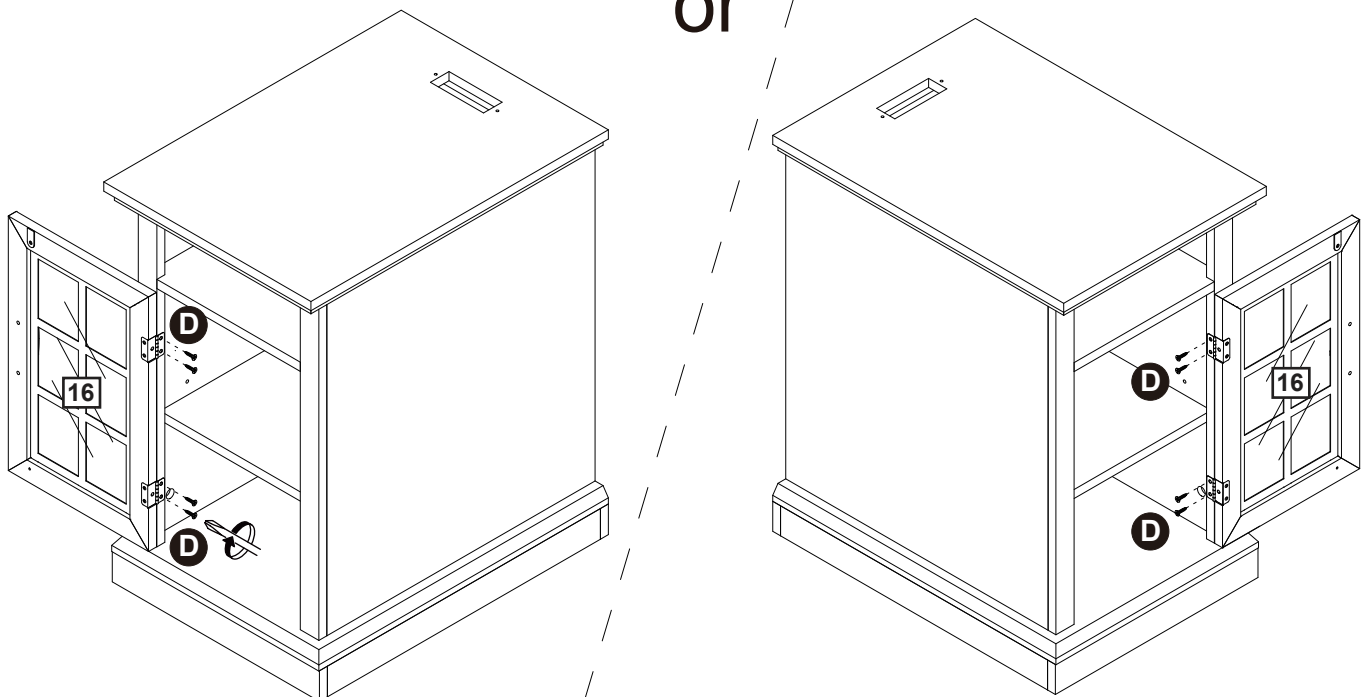

Use screw (D) to secure door (16) to the unit with a screwdriver.
Please note: you may choose to have the door open to the left or to the right.


Assembly Instructions

Step 23

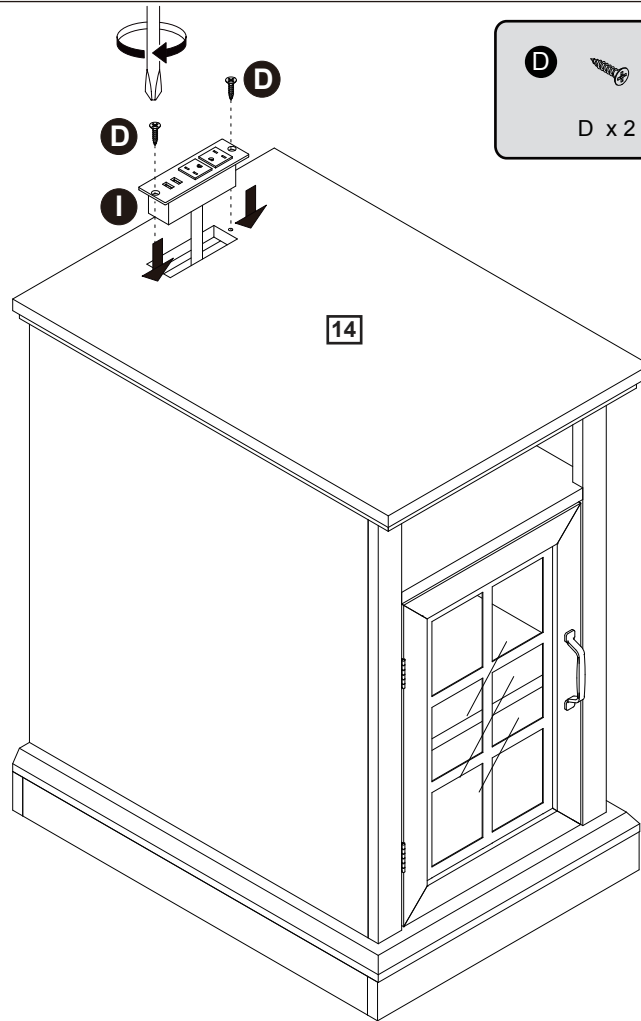

Attach recessed power strip (I) to top panel (14) using screw (D) with a screwdriver.

Step 24

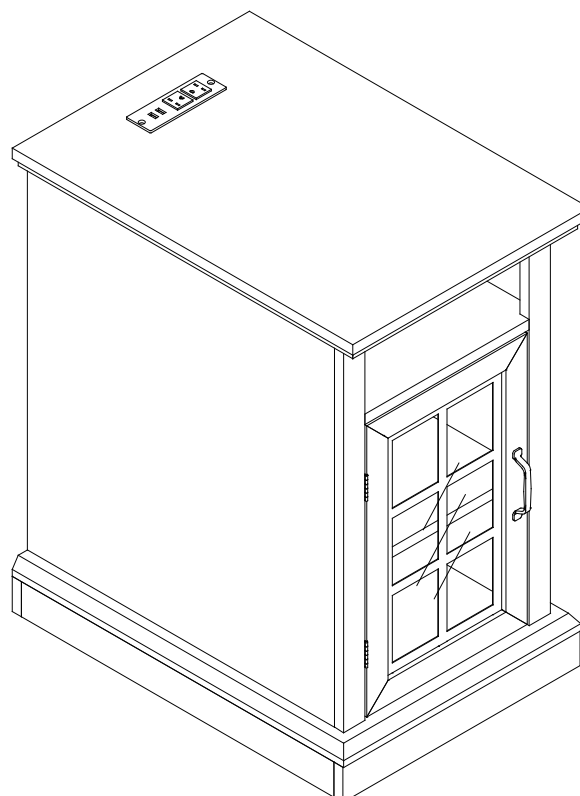

Assembly is complete.